

TA75393P, TA75393PA, TA75393S, TA75393F, TA75393FB

DUAL COMPARATOR

This device consist of two independent voltage comparators that designed to operate from a single power supply over a wide range of voltage.

Normal Operation from dual supplies is also to be guaranteed on voltage range from 2 V to 36 V.

V_{CC} is necessary at least more 1.5 V than the input common mode voltage.


The output can be connected to other open collector outputs to achieve Wired-OR relation ship.

FEATURES

- Be possible to operate at the wide range single or two supply voltage.
2~36 V or $\pm 1\sim 18$ V
- Low supply current : 0.8 mA (Typ.)
- Low input offset voltage : ± 2 mV (Typ.)
- Wide common mode input voltage : $0\sim V_{CC} - 1.5$ V
- Output is compatible with TTL, DTL, MOS and C-MOS.
- Output is open collector and wired-OR possible.


Weight	
DIP8-P-300-2.54A	: 0.5 g (Typ.)
DIP8-P-300-2.54C	: 0.6 g (Typ.)
SIP9-P-2.54A	: 0.9 g (Typ.)
SOP8-P-225-1.27	: 0.1 g (Typ.)
SOP8-P-225-1.27B	: 0.1 g (Typ.)

TA75393P




DIP8-P-300-2.54A

TA75393PA




DIP8-P-300-2.54C

TA75393S




SIP9-P-2.54A

TA75393F



SOP8-P-225-1.27


TA75393FB




SOP8-P-225-1.27B

PIN CONNECTION (TOP VIEW)


TA75393F

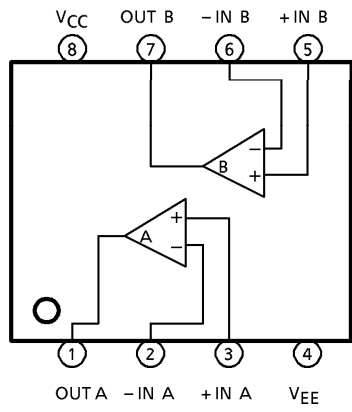


TA75393P, TA75393PA

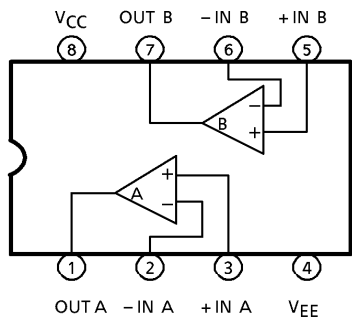


TA75393FB

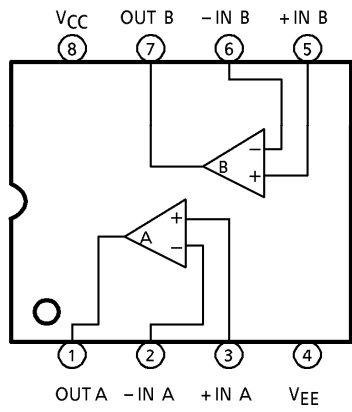

TA75393S

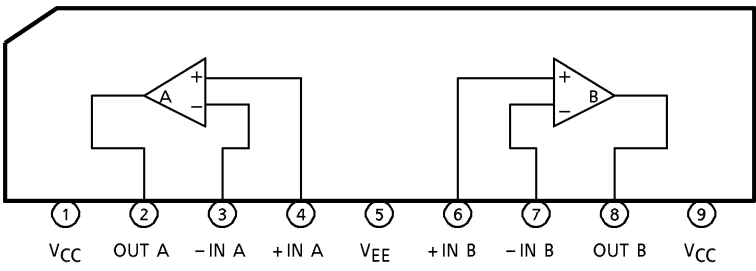

EQUIVALENT CIRCUIT

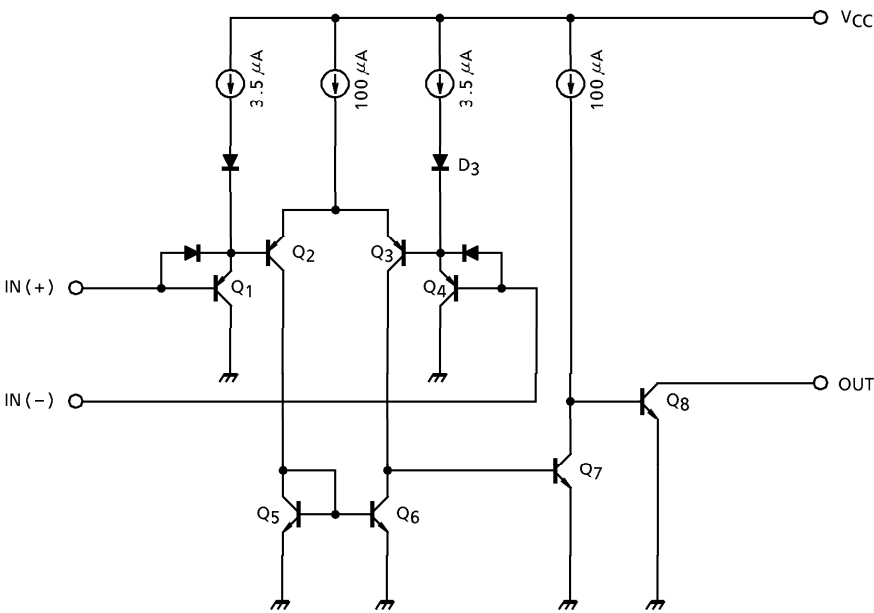

MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC	SYMBOL	TA75393P TA75393PA TA75393S	TA75393F TA75393FB	UNIT
Supply Voltage	V _{CC}	± 18 OR 36	± 18 OR 36	V
Differential Input Voltage	DV _{IN}	± 36	± 36	V
Common Mode Input Voltage	CMV _{IN}	- 0.3~V _{CC}	- 0.3~V _{CC}	V
Power Dissipation	P _D	500	240	mW
Operating Temperature	T _{opr}	- 40~85	- 40~85	°C
Storage Temperature	T _{stg}	- 55~125	- 55~125	°C

ELECTRICAL CHARACTERISTICS (V_{CC} = 5 V, Ta = 25°C)


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	4	—	—	2	5	mV
Input Bias Current	I _I	2	—	—	25	250	nA
Input Offset Current	I _{IO}	2	—	—	5	50	nA
Common Mode Input Voltage	CMV _{IN}	4	—	0	—	V _{CC} - 1.5	V
Voltage Gain	G _V	—	R _L = 15 kΩ	—	200	—	V / mV
Supply Current	I _{CC}	1	No load	—	0.8	2	mA
Sink Current	I _{SINK}	5	IN (+) = 0 V, IN (-) = 1 V V _{OL} = 1.5 V	6	16	—	mA
Output Voltage ("L" Level)	V _{OL}	5	IN (+) = 0 V, IN (-) = 1 V I _{SINK} = 3 mA	—	0.2	0.4	V
Output Leak Current	I _{LEAK}	3	IN (+) = 1 V, IN (-) = 0 V V _O = 5 V	—	0.1	—	nA
Response Time	t _{rsp}	6	R _L = 5.1 kΩ, C _L = 15 pF	—	1.3	—	μs

TEST CIRCUIT


(1) I_{CC}




(2) I_I, I_{IO}

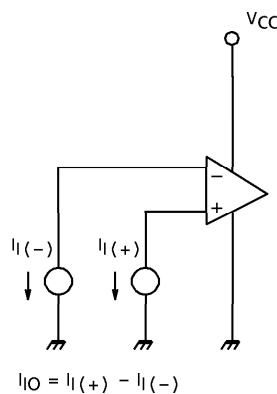


(3) I_{LEAK}

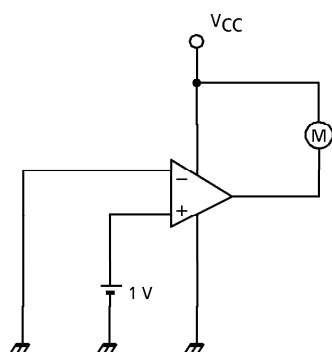


(4) V_{IO}, CMV_{IN}

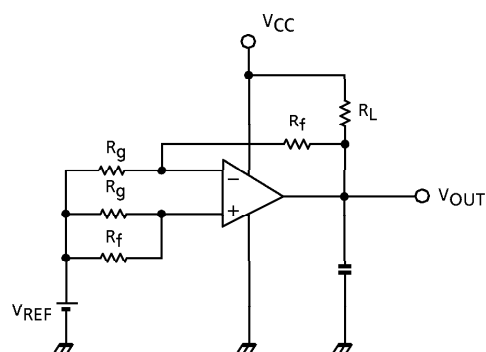







(5) I_{SINK}, V_{OL}

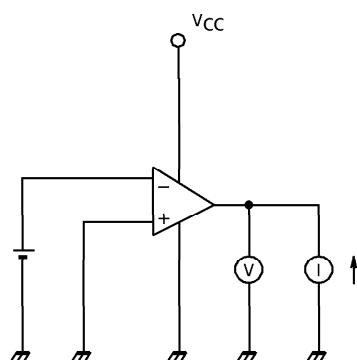

(6) t_{rsp}

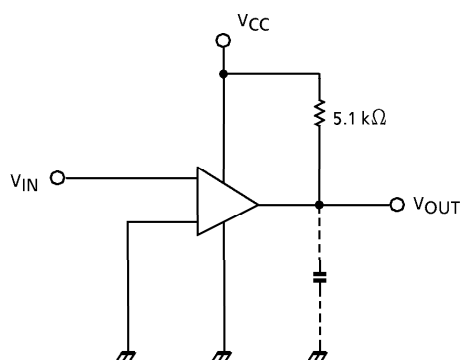


CHARACTERISTICS

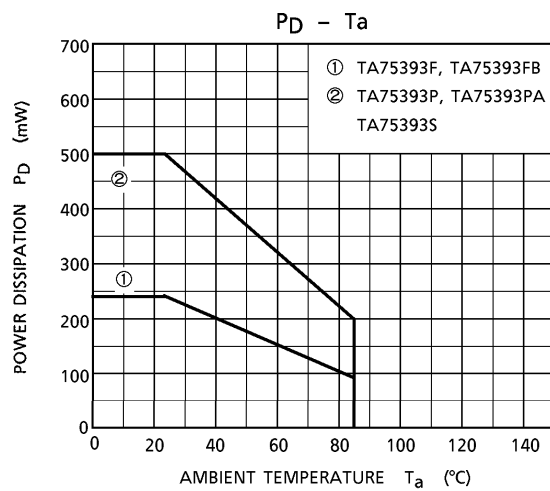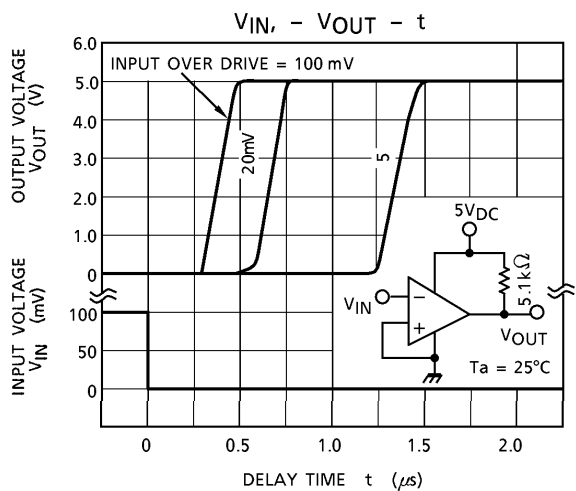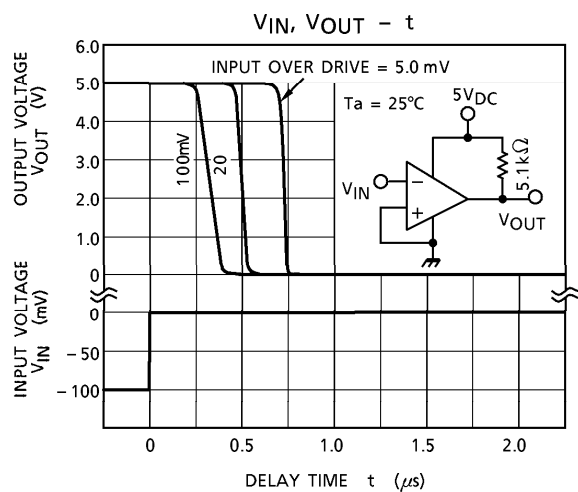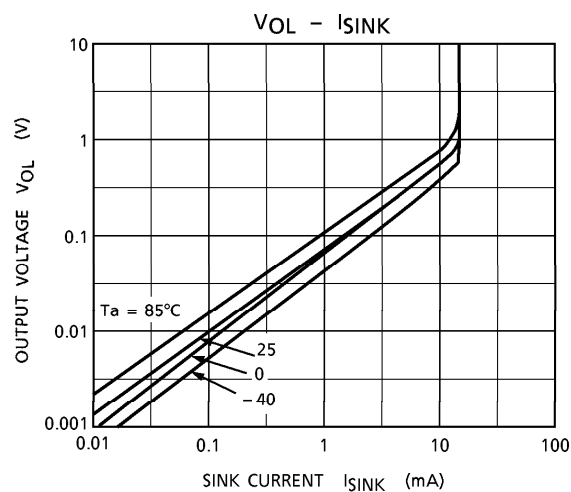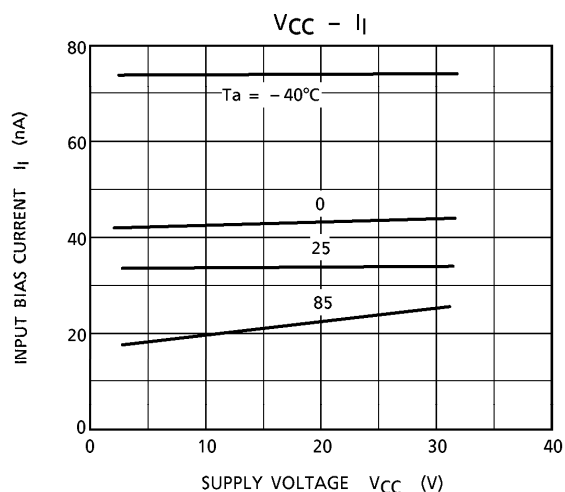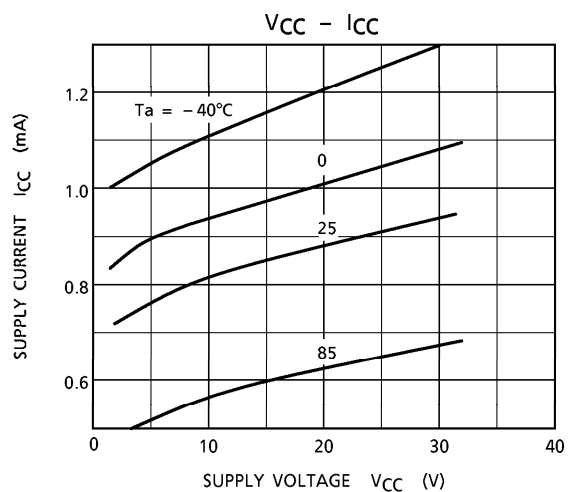

PACKAGE DIMENSIONS
DIP8-P-300-2.54A


Unit : mm

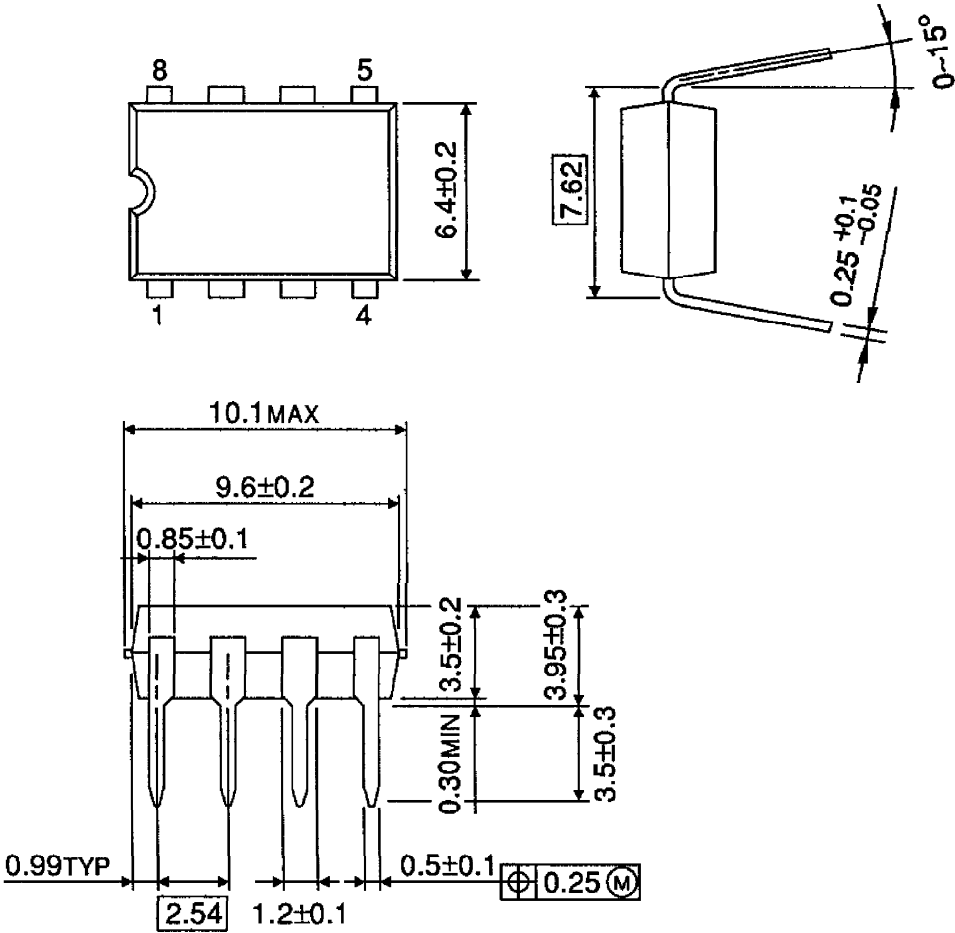

Weight : 0.5 g (Typ.)

PACKAGE DIMENSIONS
DIP8-P-300-2.54C


Unit : mm

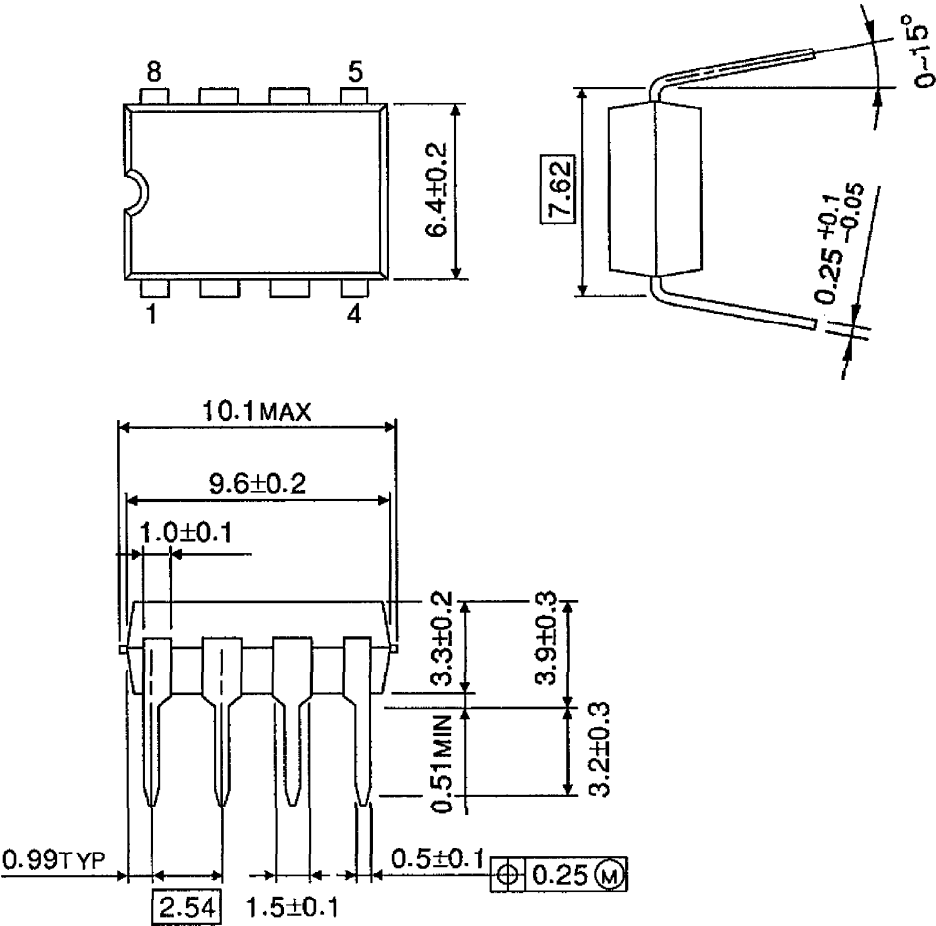

Weight : 0.6 g (Typ.)

PACKAGE DIMENSIONS
SIP9-P-2.54A


Unit : mm

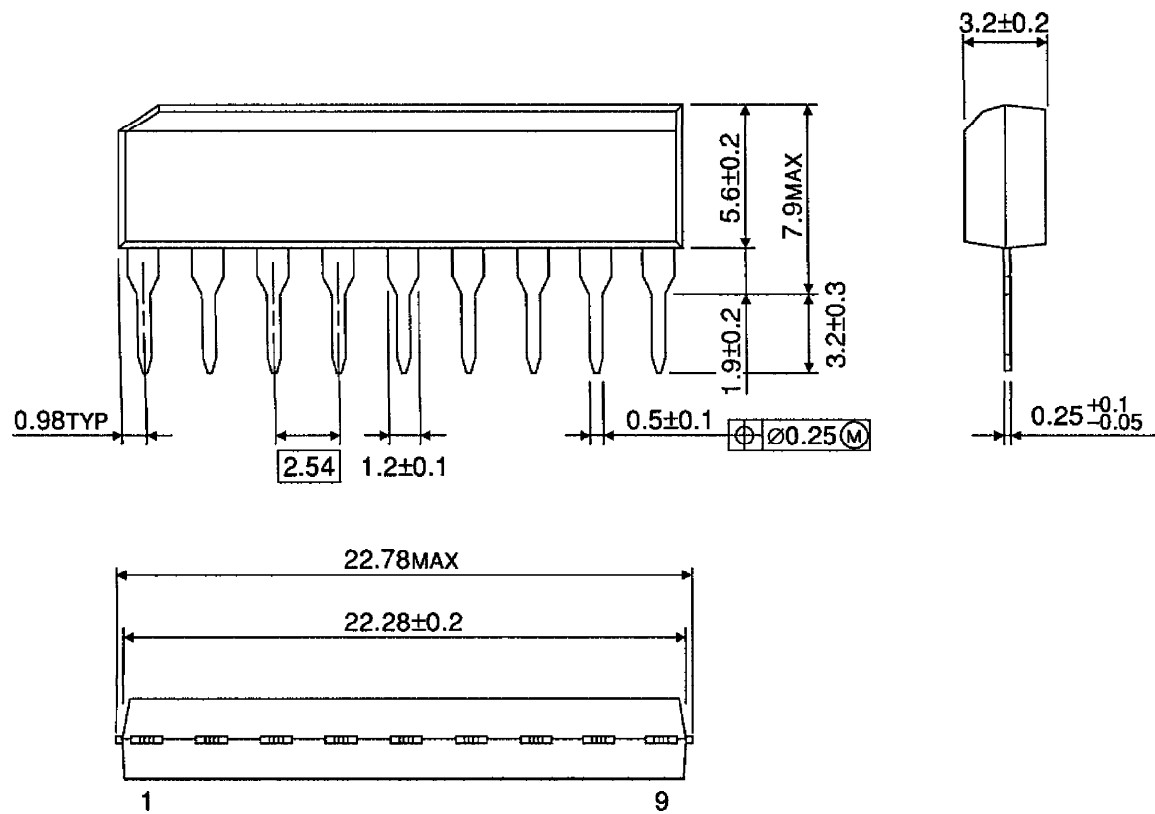

Weight : 0.9 g (Typ.)

PACKAGE DIMENSIONS
SOP8-P-225-1.27


Unit : mm

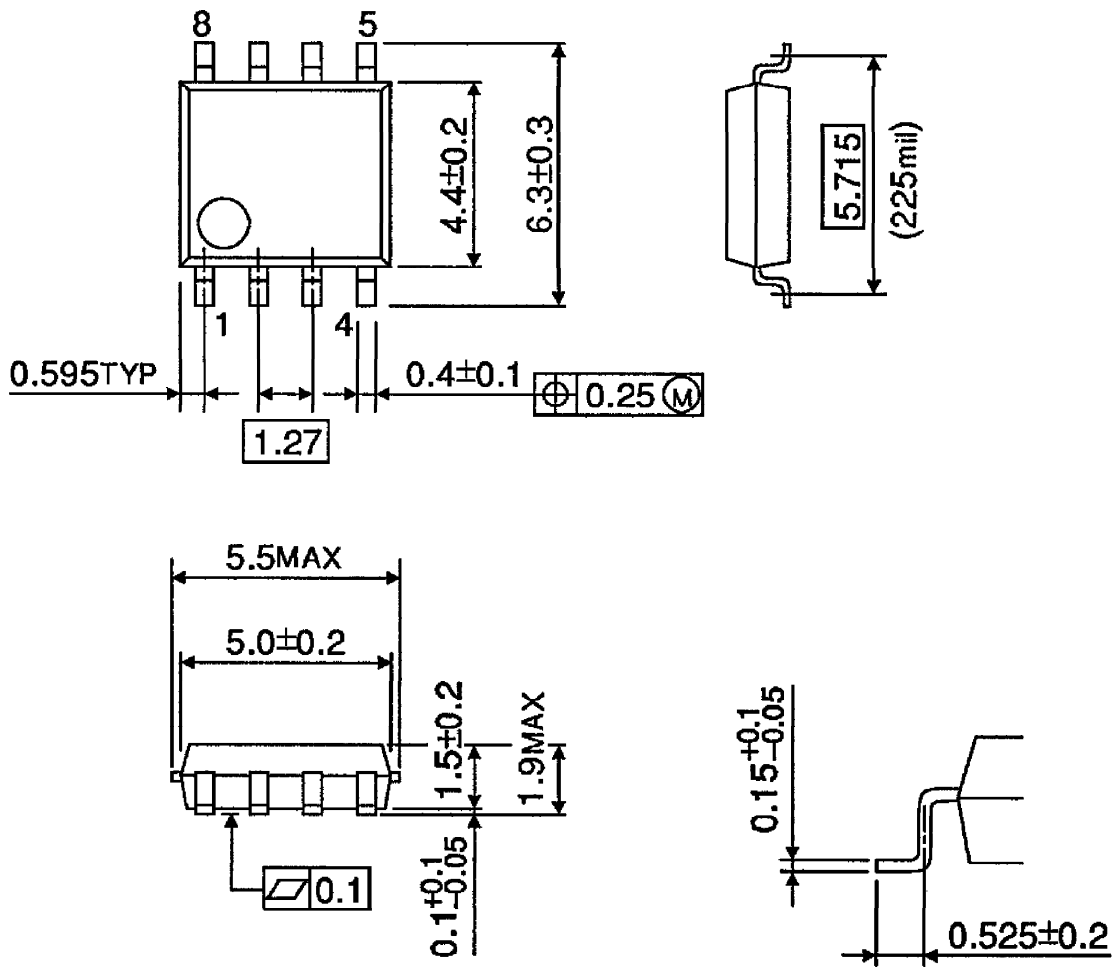

Weight : 0.1 g (Typ.)

PACKAGE DIMENSIONS
SOP8-P-225-1.27B

Unit : mm

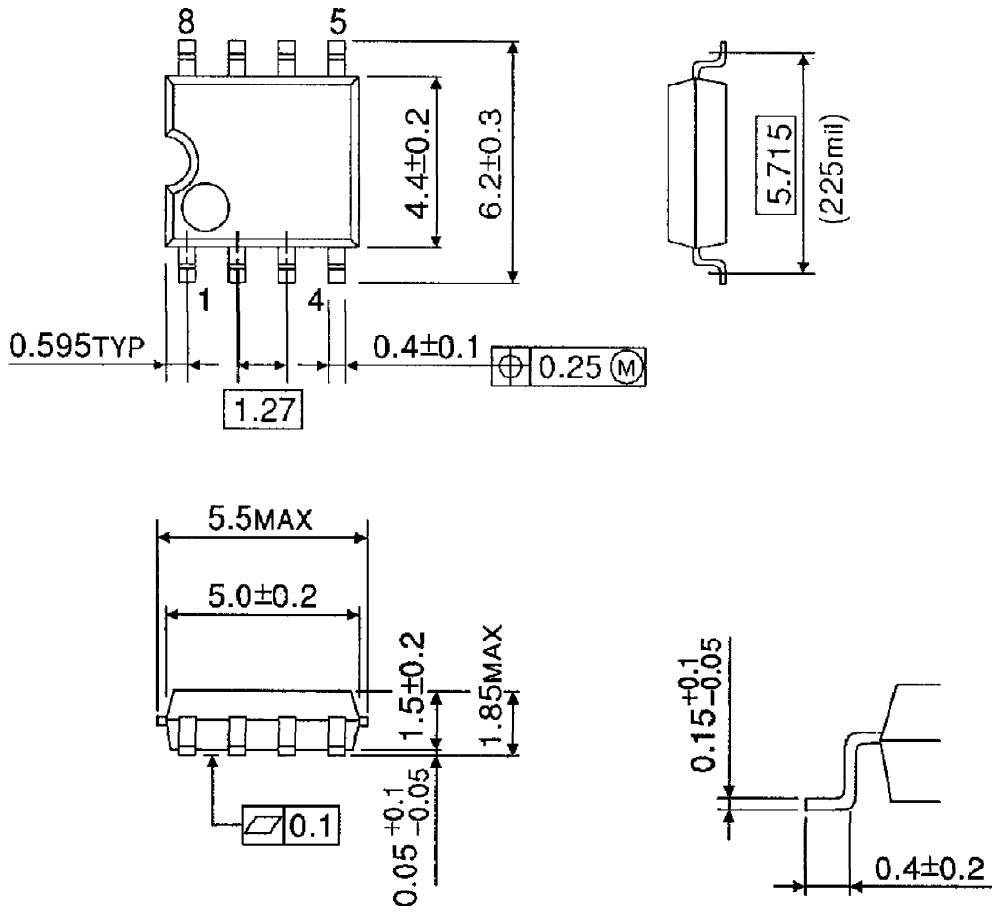

Weight : 0.1 g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.