




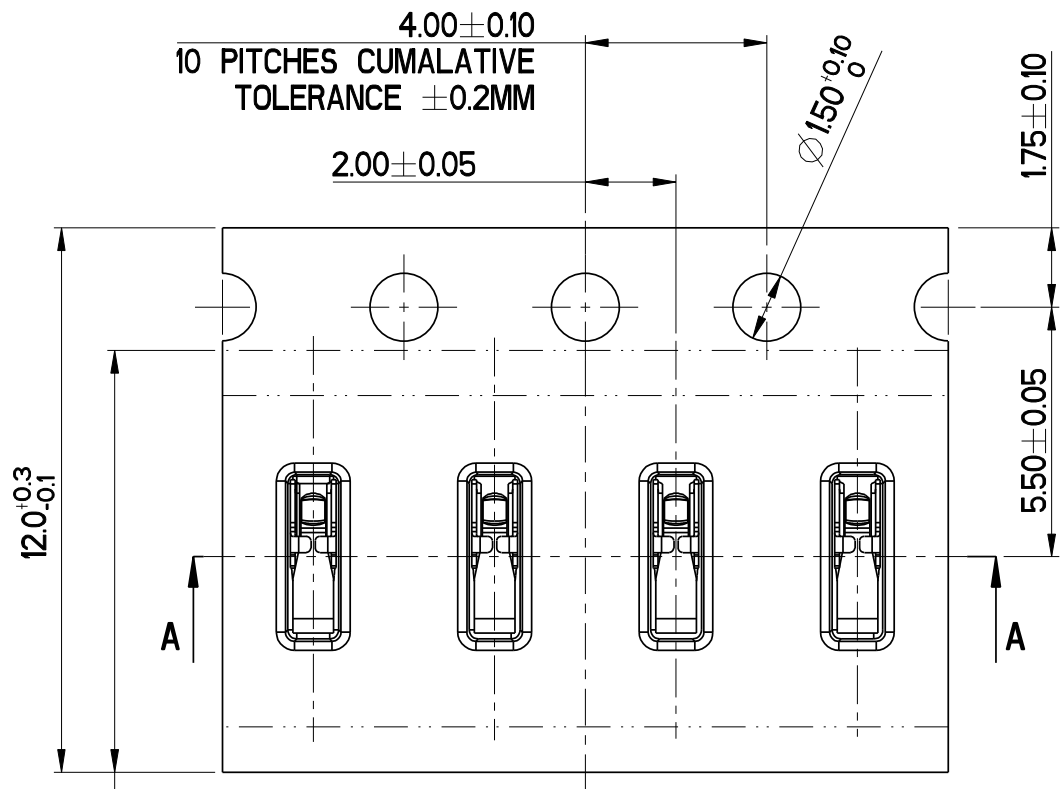

SECTION B-B

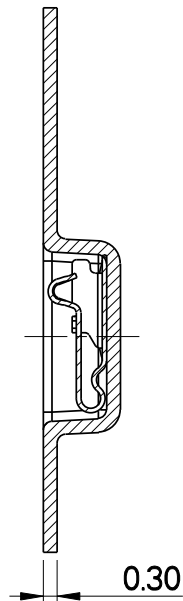

9.3 ANTI-STATIC COVER TAPE
POLYESTER - 0.025 THICK
PRESSURE SEAL





SECTION A-A


- NOTES:
- 1, UNSPECIFIED INTERNAL RADII R0.2 MM MAX.
 - 2, CARRIER TAPE MATERIAL - BLACK CONDUCTIVE POLYSTYRENE.

PACKAGING DETAILS



- 1) 9500 PCS TO BE PACKED PER REEL
- 2) LEADER : 400 MM
- 3) TRAILER : 400 MM
- 4) REEL MATERIAL - BLACK ANTI-STATIC POLYSTYRENE

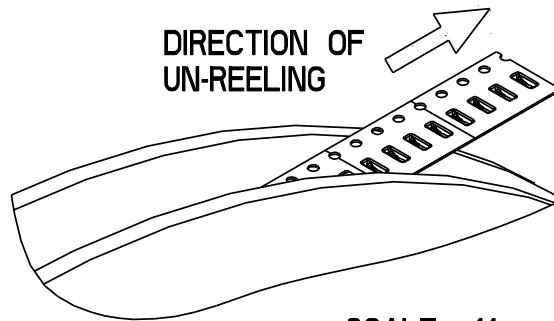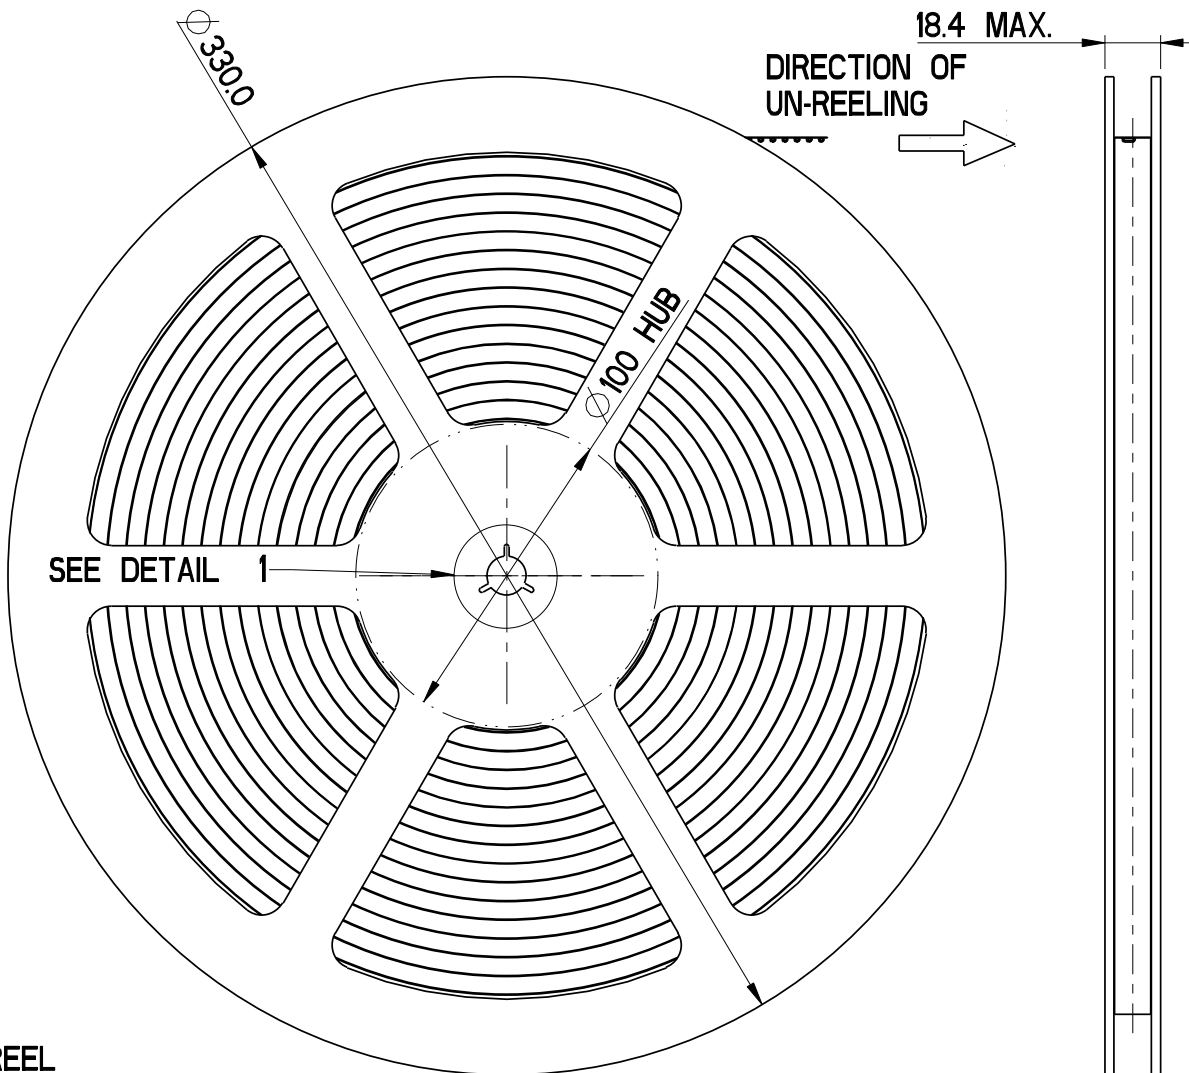

SCALE 1:1

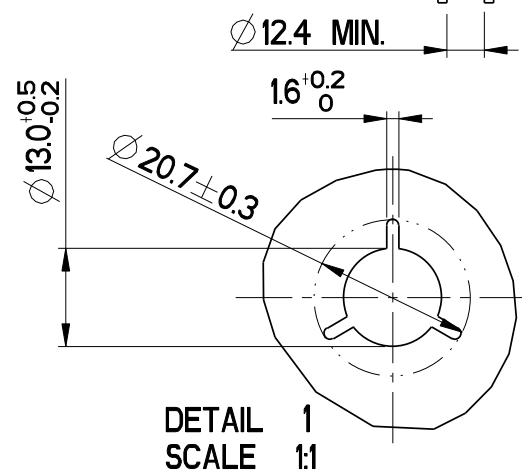

DETAIL 1
SCALE 1:1

DO NOT SCALE				A3/B			
Drawn	BILLS	26-FEB-07	Material: BERYLLIUM COPPER 0.10 THICK	 3rd ANGLE PROJECTION	 ITT Industries	Pro/E Generic Model	
Checked	DAVID	26-FEB-07				Title MICRO UNIVERSAL CONTACT 1.3mm	
Engineer.	BILLS	26-FEB-07					
Manufact.							
Assembly			Treatment:	 Surface Roughness	Cannon Electronics (SZ) Co. Ltd.	Drwg. No. CU-120220-0210	iss/rev C
Quality							
Approvals	Sign	Date	Dimensions in: mm	Cust Spec No:	Scale 1:1	Sheet 2 of 2	
SEE SHEET 1				This is issued in strict confidence on condition that it is not used as a basis for manufacture or sale and that it is not copied reprinted or disclosed to a third party either wholly or in part without the prior written consent of ITT Industries © 24-May-05			
Iss	DCN/ECN or Description		Date				