



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG



REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1891	A	RELEASED	EO	06/27/06	SA	7/25/06	HO	7/25/06
1944	B	Colors corrected	DCM	6/15/07	JWM	6/15/07	JWM	6/15/07



RoHS
Compliant

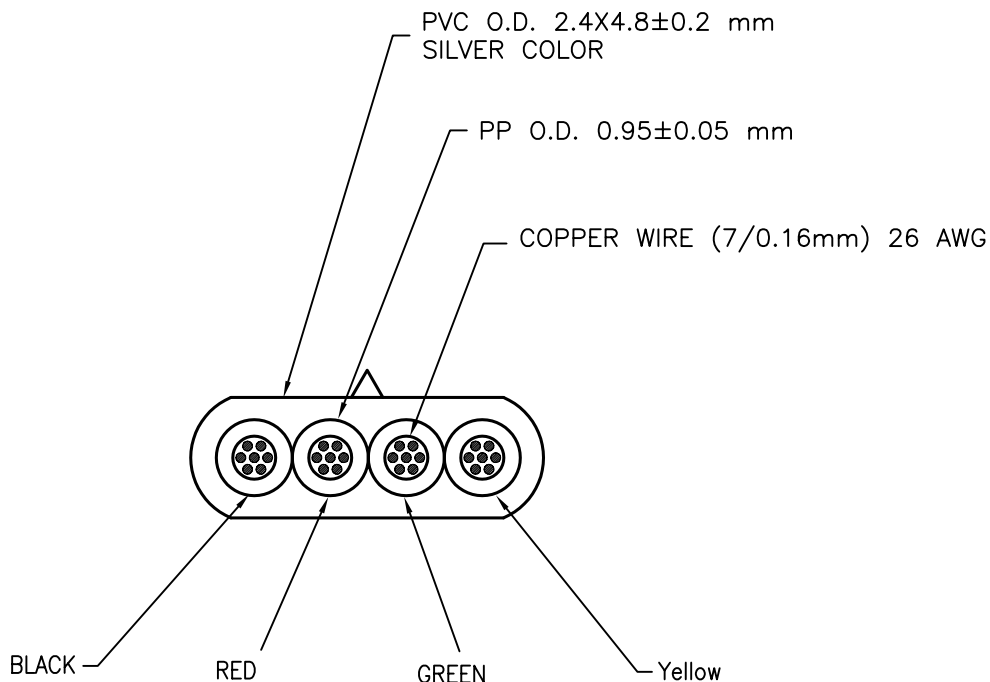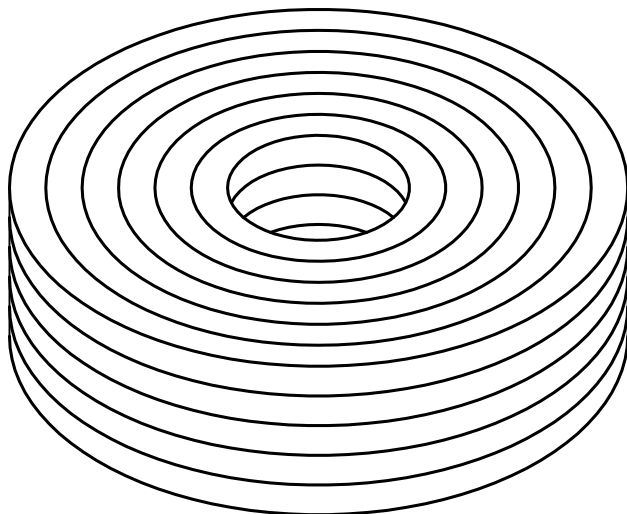

Specifications:

- 500ft ($\pm \frac{2}{0}$ ft) Flat Telephone Ext. Wire
- 26 AWG, Stranded 4C
- PVC Jacket: O.D. $2.4 \times 4.8 \pm 0.2$ mm, Silver Color
- PP Insulation: O.D. 0.95 ± 0.05 mm
- 500ft/Spool with PE membrane

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

Unless Otherwise
Specified

.X ± 0.2 [0.008]
.XX ± 0.12 [0.005]

DRAWN BY:

EKLAS ODISH

CHECKED BY:

SAMI ALNADI

APPROVED BY:

HISHAM ODISH

DATE:

06/27/06

DATE:

7/25/06

DATE:

7/25/06

DRAWING TITLE:

Flat Telephone Cable 26 AWG, 4 Stranded Conductors, 500 ft

SIZE

A

DWG. NO.

SPC19793

ELECTRONIC FILE

84K8555.DWG

REV

B

SCALE: NTS

U.O.M.: mm [INCHES]

SHEET: 1 OF 1