

GaAs SPDT Switch DC-2 GHz

SW-201/203

Features

- Fast Switching Speed, 6 ns Typical
- Ultra Low DC Power Consumption
- Low Loss (SW-201), Terminated (SW-203)

Guaranteed Specifications *

(From -55°C to +85°C)

Frequency Range		DC-2 GHz	
Model Number		SW-201	SW-203
		(L)	(T)
Insertion Loss	DC-2 GHz	0.9	1.5
	DC-1 GHz	0.8	1.1
	DC-0.5 GHz	0.7	0.9
VSWR	DC-2 GHz	1.5:1	2.0:1
	DC-1 GHz	1.3:1	1.3:1
	DC-0.5 GHz	1.2:1	1.2:1
Isolation	DC-2 GHz	30	38
	DC-1 GHz	38	45
	DC-0.5 GHz	45	50

Operating Characteristics

Impedance 50 Ohms Nominal

Switching Characteristics†

Trise, Tfall	3 ns Typ
Ton, Toff (50% CTL to 90/10% RF)	6 ns Typ
Transients (In-Band) SW-203	30 mV Typ
Transients (In-Band) SW-201	10 mV Typ

Input Power for 1 dB Compression

Control Voltages (Vdc)	0/-5	0/-8
0.5-3 GHz	+27	+33
0.05 GHz	+21	+26

Intermodulation Intercept Point

(for two-tone input power up to +13 dBm)

Intercept Points	IP ₂	IP ₃
0.5-3 GHz	+68	+46
0.05 GHz	+62	+40

Control Voltages (Complementary Logic)

V _{IN} Low (SW-201/203)	0 to -0.2V @ 20 µA Max
V _{IN} HI (SW-201)	-5V @ 50 µA Typ to -8V @ 300 µA Max
V _{IN} HI (SW-203)	-5V @ 110 µA Typ to -8V @ 600 µA Max

Environmental

See Appendix for MIL-STD-883 screening option.

* All specifications apply with 50 ohm impedance connected to all RF ports with 0 and -5 VDC control voltages.

† Faster switching speed can be achieved with enhanced driver waveform.

**For the SW-201, when an RF output is "OFF" it is shorted to case ground.

Ordering Information

Model No.	Package
SW-201 PIN	TO-5-3
SW-203 PIN	TO-5-3

Specifications Subject to Change Without Notice.


15-78

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451


Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

TO-5-3

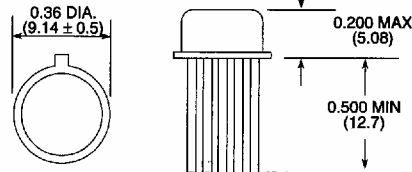


Dimensions in () are in mm.
See Appendix for complete physical dimensions.

Typical Performance

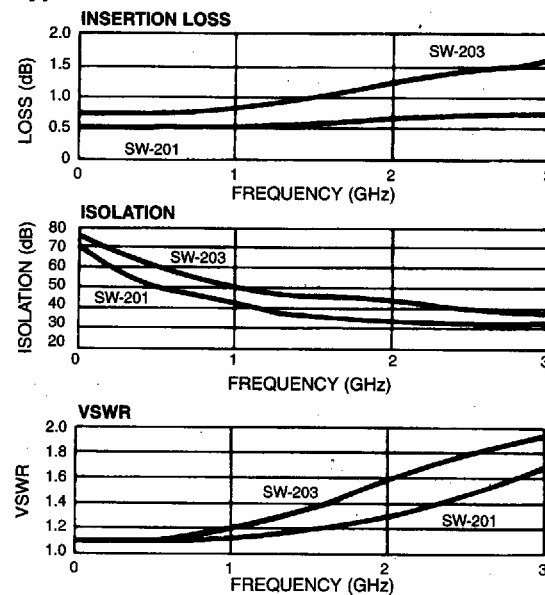

Pin Configuration

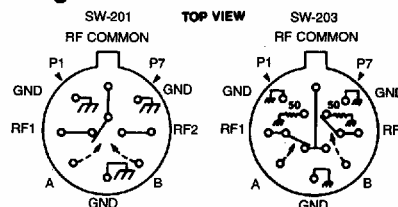

Truth Table**

Control Input		Condition of Switch	
A	B	RF Common To Each RF Port	
Hi	Low	RF1	RF2
Low	Hi	ON	ON
		OFF	ON