



# DUAL-IN-LINE SOCKETS

## SERIES 110, 122, 123 • INTEGRAL DECOUPLING CAPACITOR • OPEN FRAME

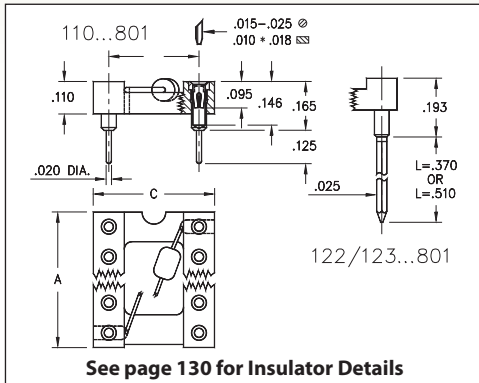

- Low profile DIP sockets w/ integral decoupling capacitor: .1μ F 20%-50V multi-layer ceramic epoxy encapsulated. Temp. range: -25° C to +85° C
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 110, 122 and 123 use MM #1001, #0088 or #0089 pins. See pages 165 & 198 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

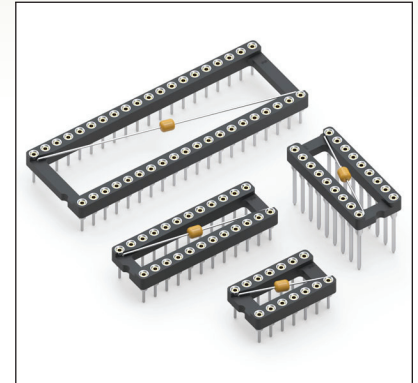

| Total number of pins      |     |     |     | Quantity per tube | ORDERING INFORMATION         |                                |                                |
|---------------------------|-----|-----|-----|-------------------|------------------------------|--------------------------------|--------------------------------|
|                           | A   | B   | C   |                   | Solder Tail                  | L = .370<br>(2 Level Wrappost) | L = .510<br>(3 Level Wrappost) |
| 14                        | 0.7 | 0.3 | 0.4 | 28                | 110-XX-314-41-801000         | 122-XX-314-41-801000           | 123-XX-314-41-801000           |
| 16                        | 0.8 | 0.3 | 0.4 | 25                | 110-XX-316-41-801000         | 122-XX-316-41-801000           | 123-XX-316-41-801000           |
| 18                        | 0.9 | 0.3 | 0.4 | 22                | 110-XX-318-41-801000         | 122-XX-318-41-801000           | 123-XX-318-41-801000           |
| 20                        | 1.0 | 0.3 | 0.4 | 20                | 110-XX-320-41-801000         | 122-XX-320-41-801000           | 123-XX-320-41-801000           |
| 22                        | 1.1 | 0.3 | 0.4 | 18                | 110-XX-322-41-801000         | 122-XX-322-41-801000           | 123-XX-322-41-801000           |
| 24                        | 1.2 | 0.3 | 0.4 | 16                | 110-XX-324-41-801000         | 122-XX-324-41-801000           | 123-XX-324-41-801000           |
| 28                        | 1.4 | 0.3 | 0.4 | 14                | 110-XX-328-41-801000         | 122-XX-328-41-801000           | 123-XX-328-41-801000           |
| 24                        | 1.2 | 0.6 | 0.7 | 16                | 110-XX-624-41-801000         | 122-XX-624-41-801000           | 123-XX-624-41-801000           |
| 28                        | 1.4 | 0.6 | 0.7 | 14                | 110-XX-628-41-801000         | 122-XX-628-41-801000           | 123-XX-628-41-801000           |
| 32                        | 1.6 | 0.6 | 0.7 | 12                | 110-XX-632-41-801000         | 122-XX-632-41-801000           | 123-XX-632-41-801000           |
| 40                        | 2.0 | 0.6 | 0.7 | 10                | 110-XX-640-41-801000         | 122-XX-640-41-801000           | 123-XX-640-41-801000           |
|                           |     |     |     |                   | XX=Plating Code<br>See Below | RoHS-2<br>2011/65/EU           |                                |
| SPECIFY PLATING CODE XX = |     |     |     |                   | 13                           | 93                             | 43                             |
| Sleeve (Pin)              |     |     |     |                   | 10 μ" Au                     | 200 μ" Sn/Pb                   | 200 μ" Sn                      |
| Contact (Clip)            |     |     |     |                   | 30 μ" Au                     | 30 μ" Au                       | 30 μ" Au                       |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Mill-Max:

[123-43-624-41-801000](#) [110-93-316-41-801000](#) [110-93-318-41-801000](#) [110-93-314-41-801000](#) [110-93-320-41-801000](#) [110-93-324-41-801000](#) [110-90-316-00-000000](#) [110-90-628-00-000000](#) [123-93-628-41-801000](#) [123-93-624-41-801000](#) [123-93-640-41-801000](#) [123-93-314-41-801000](#) [123-93-316-41-801000](#) [123-93-318-41-801000](#) [123-93-320-41-801000](#) [123-93-324-41-801000](#) [110-13-628-41-801000](#) [110-13-624-41-801000](#) [110-13-314-41-001100](#) [110-13-640-41-801000](#) [110-93-632-41-801000](#) [110-93-624-41-801000](#) [110-93-628-41-801000](#) [110-93-640-41-801000](#) [110-13-314-41-801000](#) [110-13-316-41-801000](#) [110-13-318-41-801000](#) [110-13-320-41-801000](#) [110-13-324-41-801000](#) [110-13-322-41-801000](#) [110-13-328-41-801000](#) [110-13-422-41-801000](#) [110-13-632-41-801000](#) [110-93-322-41-801000](#) [110-93-328-41-801000](#) [110-93-422-41-801000](#) [122-13-314-41-801000](#) [122-13-316-41-801000](#) [122-13-318-41-801000](#) [122-13-320-41-801000](#) [122-13-322-41-801000](#) [122-13-324-41-801000](#) [122-13-328-41-801000](#) [122-13-422-41-801000](#) [122-13-624-41-801000](#) [122-13-628-41-801000](#) [122-13-632-41-801000](#) [122-13-640-41-801000](#) [123-13-314-41-801000](#) [123-13-316-41-801000](#) [123-13-318-41-801000](#) [123-13-320-41-801000](#) [123-13-322-41-801000](#) [123-13-324-41-801000](#) [123-13-328-41-801000](#) [123-13-422-41-801000](#) [123-13-624-41-801000](#) [123-13-628-41-801000](#) [123-13-632-41-801000](#) [123-13-640-41-801000](#) [123-93-322-41-801000](#) [123-93-328-41-801000](#) [123-93-422-41-801000](#) [123-93-632-41-801000](#) [110-43-318-41-801000](#) [123-43-314-41-801000](#) [123-43-640-41-801000](#) [123-43-316-41-801000](#) [123-43-320-41-801000](#) [123-43-628-41-801000](#) [110-43-624-41-801000](#) [110-43-324-41-801000](#) [110-43-628-41-801000](#) [110-43-320-41-801000](#) [110-43-640-41-801000](#) [110-43-314-41-801000](#) [110-43-316-41-801000](#) [123-43-318-41-801000](#) [110-43-322-41-801000](#) [110-43-328-41-801000](#) [110-43-422-41-801000](#) [110-43-632-41-801000](#) [123-43-322-41-801000](#) [123-43-324-41-801000](#) [123-43-328-41-801000](#) [123-43-632-41-801000](#) [110-13-652-61-001000](#) [110-41-422-41-605000](#) [110-13-628-61-001000](#) [110-91-952-61-001000](#) [110-43-632-61-605000](#) [110-33-320-41-530000](#) [110-93-964-61-001000](#) [110-41-624-61-001000](#) [110-93-422-61-001000](#) [110-41-952-61-001000](#) [110-13-322-61-801000](#) [110-43-648-61-001000](#) [110-11-308-41-001000](#) [110-44-964-61-001000](#)