

**GLASS PASSIVATED BRIDGE RECTIFIERS**

REVERSE VOLTAGE - **50 to 1000** Volts  
FORWARD CURRENT - **25** Amperes


**FEATURES**

- Rating to 1000V PRV
- High efficiency
- Glass passivated chip junction
- Electrically isolated metal case for maximum heat dissipation
- UL recognized file # E95060


**MECHANICAL DATA**

- Case : Mounted in the bridge encapsulation
- Mounting : Hole for # 10 screw
- Polarity : As marked on case
- Weight : 0.85 ounces , 24.0 grams (terminal)  
: 0.74 ounces , 21.0 grams (wire)

**KBPC-GW (Wire)**



**KBPC-G (Terminal)**



| KBPC-G/KBPC-GW |                       |       |
|----------------|-----------------------|-------|
| DIM.           | MIN.                  | MAX.  |
| A              | 31.80                 | -     |
| B              | 7.90                  | 8.40  |
| C              | 28.30                 | 28.80 |
| D              | 17.60                 | 18.60 |
| E              | 0.97                  | 1.07  |
| F              | 10.90                 | 11.90 |
| G              | 17.60                 | 18.60 |
| H              | 13.80                 | 14.80 |
| I              | 16.10                 | 17.10 |
| J              | 16.10                 | 17.10 |
| K              | 18.80                 | 21.30 |
| L              | 0.76                  | 0.86  |
| M              | 6.30                  | 6.50  |
| N              | HOLE FOR NO. 10 SCREW |       |
|                | 5.08                  | 5.59  |

All Dimensions in millimeter

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

| CHARACTERISTICS                                                                                              | SYMBOL            | KBPC25<br>005G/W | KBPC25<br>01G/W | KBPC25<br>02G/W | KBPC25<br>04G/W | KBPC25<br>06G/W | KBPC25<br>08G/W | KBPC25<br>10G/W | UNIT             |
|--------------------------------------------------------------------------------------------------------------|-------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|
| Maximum Recurrent Peak Reverse Voltage                                                                       | V <sub>RRM</sub>  | 50               | 100             | 200             | 400             | 600             | 800             | 1000            | V                |
| Maximum RMS Voltage                                                                                          | V <sub>RMS</sub>  | 35               | 70              | 140             | 280             | 420             | 560             | 700             | V                |
| Maximum DC Blocking Voltage                                                                                  | V <sub>DC</sub>   | 50               | 100             | 200             | 400             | 600             | 800             | 1000            | V                |
| Maximum Average Forward Rectified Current @T <sub>C</sub> = T <sub>a</sub>                                   | I <sub>(AV)</sub> | 25.0             |                 |                 |                 |                 |                 |                 | A                |
| Peak Forward Surge Current<br>8.3ms single half sine-wave<br>super imposed on rated load                     | I <sub>FSM</sub>  | 350              |                 |                 |                 |                 |                 |                 | A                |
| Maximum forward Voltage at 12.5A DC                                                                          | V <sub>F</sub>    | 1.1              |                 |                 |                 |                 |                 |                 | V                |
| Maximum DC Reverse Current<br>at Rated DC Blocking Voltage @T <sub>J</sub> = 25°C<br>@T <sub>J</sub> = 125°C | I <sub>R</sub>    | 5.0<br>500       |                 |                 |                 |                 |                 |                 | uA               |
| I <sup>2</sup> t Rating for fusing (t < 8.3ms), (Note 1)                                                     | I <sup>2</sup> t  | 508              |                 |                 |                 |                 |                 |                 | A <sup>2</sup> S |
| Typical Junction Capacitance per element (Note 2)                                                            | C <sub>J</sub>    | 300              |                 |                 |                 |                 |                 |                 | pF               |
| Typical Thermal Resistance (Note 3)                                                                          | R <sub>θJC</sub>  | 3.0              |                 |                 |                 |                 |                 |                 | °C/W             |
| Operating Temperature Range                                                                                  | T <sub>J</sub>    | -55 to +150      |                 |                 |                 |                 |                 |                 | °C               |
| Storage Temperature Range                                                                                    | T <sub>STG</sub>  | -55 to +150      |                 |                 |                 |                 |                 |                 | °C               |

NOTES : 1. Measured at non-repetitive, for greater than 1ms and less than 8.3ms  
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
3. Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

REV. 4, Sep-2010, KBD102

FIG.1 - FORWARD CURRENT DERATING CURVE

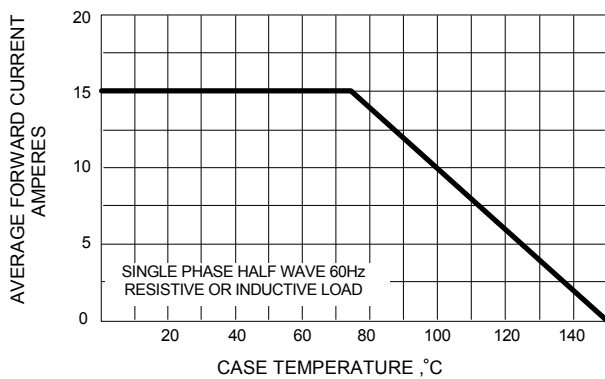


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

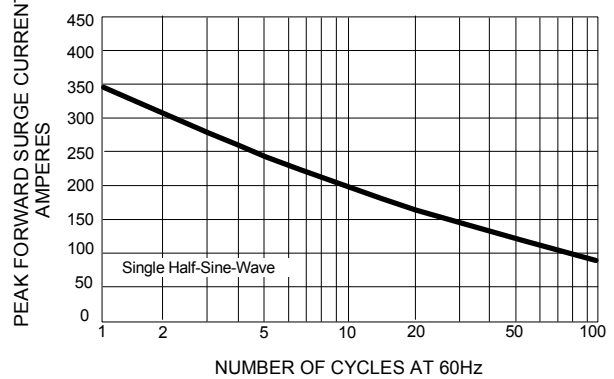


FIG.3 - TYPICAL JUNCTION CAPACITANCE

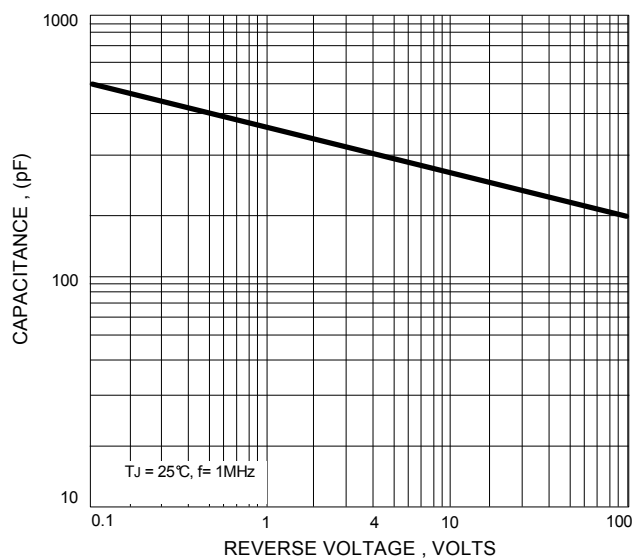


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


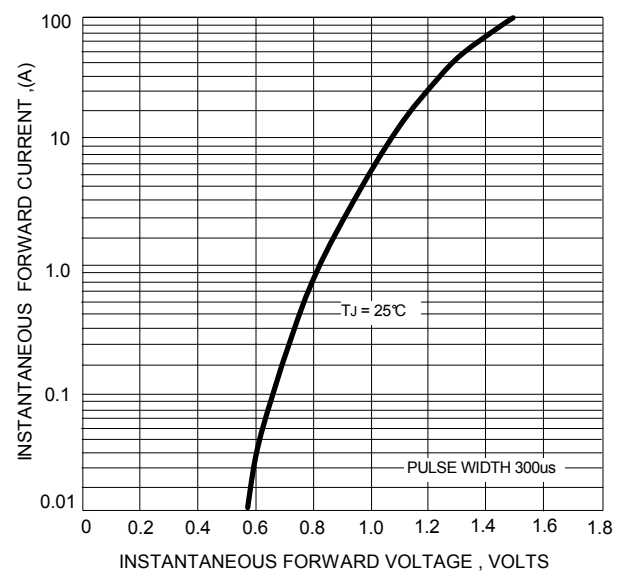


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

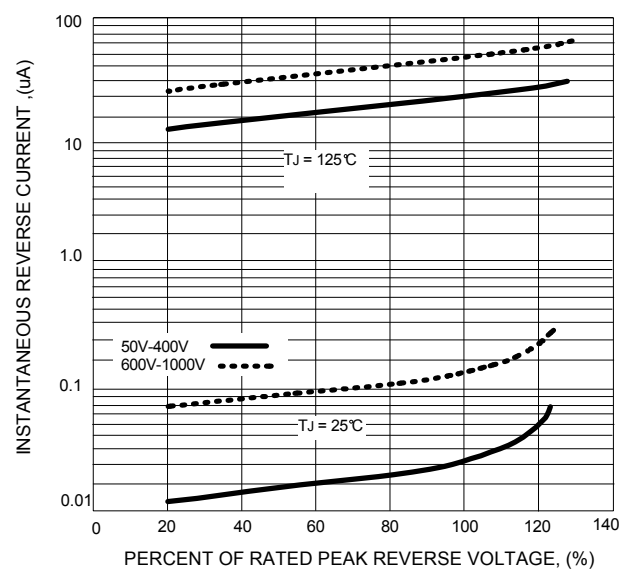

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.