

# Motor Protection Circuit Breaker (MPCB) J7MN

## MPCB system (motor protection CLASS 10)

- Rotary and switch types
- Rated operational current = 12 A, 25 A and 50 A
- Switching capacity up to 12.5 A = 100 kA/400 V
- Fixed short-circuit release =  $13 \times I_u$
- Overload release adjustable  $0.7 - 1 \times I_u$
- Single phasing sensitivity

## Auxiliary contact modules

- ON/OFF indication for MPCB front mounting and side mounting
- Trip indication for MPCB side mounting

## Accessoires

- Undervoltage release
- Shunt release
- Three phase busbar system up to 5 MPCB
- Moulded plastic enclosures (IP55)
- Moulded plastic front plates (IP55)
- Door coupling rotary mechanisms (black and red/yellow)



## Approved Standards

| Standard     | Guide No (US,C) |
|--------------|-----------------|
| UL           | see page 89     |
| ICE 947-5-1  |                 |
| VDE 0660     |                 |
| EN 60947-5-1 |                 |

# Ordering Information

## ■ Model Number Legend

### 1. Motor Protection Circuit Breaker (MPCB)

J7MN-□□-□□□  
1 2 3

- 1) Motor Protection Circuit Breaker (MPCB)
- 2) Type
  - 12: Switch type (0.11 - 12 A)
  - 25: Rotary type (0.16 - 25 A)
  - 50: Rotary type (32 - 40 A)
- 3) Setting range (examples)
  - E16: 0.11 - 0.16 A
  - E2: 0.14 - 0.2 A
  - 16: 10 - 16 A

...

### 2. Aux. Contacts for MPCB

J73MN-□□□  
1 2 3

- 1) Aux. Contact for MPCB
- 2) 11: 1 NO 1 NC
- 3) S: side mounting  
F: front mounting

J73MN-□□□□  
1 2 3 4

- 1) Aux. Contact for MPCB
- 2) T: Trip indicating contact
- 3) 11: 1 NO 1 NC
- 4) S: side mounting

### 3. Accessories for MPCB

J74MN-□□□  
1 2 3

- 1) Accessories for MPCB
- 2) S: Shunt release  
U: Under voltage release
- 3) N1: 230 V 50 Hz / 240 V 60 Hz  
N2: 210 - 230 V 50/60 Hz

J74MN-□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) PF: Enclosure IP55  
P: Module plastic front plate  
PH: Holder for front plate
- 3) 12: Switch type  
25: Rotary type

J74MN-□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) DC: Door coupling rotary mechanism
- 3) B: black / gray  
RY: red / yellow

J74MN-□□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) L3: 3-phase busbar system (45 mm modular spacing)  
DS: Shroud for unused terminal
- 3) 1/2: for 2 circuit breakers  
1/3: for 3 circuit breakers  
1/4: for 4 circuit breakers  
1/5: for 5 circuit breakers

J74MN-□□□□□  
1 2 3

- 1) Accessories for MPCB
- 2) TC: Line side terminal
- 3) 12: for switch type  
25: for rotary type

## ■ System overview

### Motor Protection Circuit Breaker (MPCB)

|                                                                                   | Rated current | Suitable for motors <sup>*1</sup> | Current setting range         |                                          | Short-circuit breaking capacity at 3~400V | Type         | Pack | Weight approx. |
|-----------------------------------------------------------------------------------|---------------|-----------------------------------|-------------------------------|------------------------------------------|-------------------------------------------|--------------|------|----------------|
|                                                                                   | In<br>A       | 3~400V<br>kW                      | Thermal overload release<br>A | Instantaneous short-circuit release<br>A | kA                                        |              | pcs. | kg/pcs.        |
| <b>Circuit-Breakers J7MN-12</b>                                                   |               |                                   |                               |                                          |                                           |              |      |                |
|  | 0.16          | -                                 | 0.11 – 0.16                   | 2.1                                      | 100                                       | J7MN-12-E16  | 1    | 0.21           |
|                                                                                   | 0.2           | -                                 | 0.14 – 0.2                    | 2.6                                      | 100                                       | J7MN-12-E2   | 1    | 0.21           |
|                                                                                   | 0.25          | 0.06                              | 0.18 – 0.25                   | 3.3                                      | 100                                       | J7MN-12-E25  | 1    | 0.21           |
|                                                                                   | 0.32          | 0.09                              | 0.22 – 0.32                   | 4.2                                      | 100                                       | J7MN-12-E32  | 1    | 0.21           |
|                                                                                   | 0.4           | -                                 | 0.28 – 0.4                    | 5.2                                      | 100                                       | J7MN-12-E4   | 1    | 0.21           |
|                                                                                   | 0.5           | 0.12                              | 0.35 – 0.5                    | 6.5                                      | 100                                       | J7MN-12-E5   | 1    | 0.21           |
|                                                                                   | 0.63          | 0.18                              | 0.45 – 0.63                   | 8.2                                      | 100                                       | J7MN-12-E63  | 1    | 0.21           |
|                                                                                   | 0.8           | -                                 | 0.55 – 0.8                    | 10                                       | 100                                       | J7MN-12-E8   | 1    | 0.21           |
|                                                                                   | 1             | 0.25                              | 0.7 – 1                       | 13                                       | 100                                       | J7MN-12-1    | 1    | 0.21           |
|                                                                                   | 1.25          | 0.37                              | 0.9 – 1.25                    | 16                                       | 100                                       | J7MN-12-1E25 | 1    | 0.21           |
|                                                                                   | 1.6           | 0.55                              | 1.1 – 1.6                     | 21                                       | 100                                       | J7MN-12-1E6  | 1    | 0.21           |
|                                                                                   | 2             | 0.75                              | 1.4 – 2                       | 26                                       | 100                                       | J7MN-12-2    | 1    | 0.21           |
|                                                                                   | 2.5           | -                                 | 1.8 – 2.5                     | 33                                       | 100                                       | J7MN-12-2E5  | 1    | 0.21           |
|                                                                                   | 3.2           | 1.1                               | 2.2 – 3.2                     | 42                                       | 100                                       | J7MN-12-3E2  | 1    | 0.21           |
|                                                                                   | 4             | 1.5                               | 2.8 – 4                       | 52                                       | 100                                       | J7MN-12-4    | 1    | 0.21           |
|                                                                                   | 5             | -                                 | 3.5 – 5                       | 65                                       | 100                                       | J7MN-12-5    | 1    | 0.21           |
|                                                                                   | 6.3           | 2.2                               | 4.5 – 6.3                     | 82                                       | 100                                       | J7MN-12-6E3  | 1    | 0.21           |
|                                                                                   | 8             | 3                                 | 5.5 – 8                       | 104                                      | 50                                        | J7MN-12-8    | 1    | 0.21           |
|                                                                                   | 10            | 4                                 | 7 – 10                        | 130                                      | 50                                        | J7MN-12-10   | 1    | 0.21           |
|                                                                                   | 12            | 5.5                               | 9 – 12                        | 156                                      | 50                                        | J7MN-12-12   | 1    | 0.21           |

\*1) Recommended values for standard motors

|                                                                                     | Rated current | Suitable for motors*1 | Current setting range      |                                       |     | Short-circuit breaking capacity | Type         | Pack | Weight approx. |
|-------------------------------------------------------------------------------------|---------------|-----------------------|----------------------------|---------------------------------------|-----|---------------------------------|--------------|------|----------------|
|                                                                                     | In A          | 3~400V kW             | Thermal overload release A | Instantaneous short-circuit release A |     | at 3~400V kA                    |              | pcs. | kg/pcs.        |
| Circuit-Breakers J7MN-25                                                            |               |                       |                            |                                       |     |                                 |              |      |                |
|    | 0.16          | -                     | 0.11 –                     | 0.16                                  | 2.1 | 100                             | J7MN-25-E16  | 1    | 0.32           |
|                                                                                     | 0.2           | -                     | 0.14 –                     | 0.2                                   | 2.6 | 100                             | J7MN-25-E2   | 1    | 0.32           |
|                                                                                     | 0.25          | 0.06                  | 0.18 –                     | 0.25                                  | 3.3 | 100                             | J7MN-25-E25  | 1    | 0.32           |
|                                                                                     | 0.32          | 0.09                  | 0.22 –                     | 0.32                                  | 4.2 | 100                             | J7MN-25-E32  | 1    | 0.32           |
|                                                                                     | 0.4           | -                     | 0.28 –                     | 0.4                                   | 5.2 | 100                             | J7MN-25-E4   | 1    | 0.32           |
|                                                                                     | 0.5           | 0.12                  | 0.35 –                     | 0.5                                   | 6.5 | 100                             | J7MN-25-E5   | 1    | 0.32           |
|                                                                                     | 0.63          | 0.18                  | 0.45 –                     | 0.63                                  | 8.2 | 100                             | J7MN-25-E63  | 1    | 0.32           |
|                                                                                     | 0.8           | -                     | 0.55 –                     | 0.8                                   | 10  | 100                             | J7MN-25-E8   | 1    | 0.32           |
|                                                                                     | 1             | 0.25                  | 0.7 –                      | 1                                     | 13  | 100                             | J7MN-25-1    | 1    | 0.32           |
|                                                                                     | 1.25          | 0.37                  | 0.9 –                      | 1.25                                  | 16  | 100                             | J7MN-25-1E25 | 1    | 0.32           |
|                                                                                     | 1.6           | 0.55                  | 1.1 –                      | 1.6                                   | 21  | 100                             | J7MN-25-1E6  | 1    | 0.32           |
|                                                                                     | 2             | 0.75                  | 1.4 –                      | 2                                     | 26  | 100                             | J7MN-25-2    | 1    | 0.32           |
|                                                                                     | 2.5           | -                     | 1.8 –                      | 2.5                                   | 33  | 100                             | J7MN-25-2E5  | 1    | 0.32           |
|                                                                                     | 3.2           | 1.1                   | 2.2 –                      | 3.2                                   | 42  | 100                             | J7MN-25-3E2  | 1    | 0.32           |
|                                                                                     | 4             | 1.5                   | 2.8 –                      | 4                                     | 52  | 100                             | J7MN-25-4    | 1    | 0.32           |
|                                                                                     | 5             | -                     | 3.5 –                      | 5                                     | 65  | 100                             | J7MN-25-5    | 1    | 0.32           |
|                                                                                     | 6.3           | 2.2                   | 4.5 –                      | 6.3                                   | 82  | 100                             | J7MN-25-6E3  | 1    | 0.32           |
|                                                                                     | 8             | 3                     | 5.5 –                      | 8                                     | 104 | 100                             | J7MN-25-8    | 1    | 0.32           |
|                                                                                     | 10            | 4                     | 7 –                        | 10                                    | 130 | 100                             | J7MN-25-10   | 1    | 0.32           |
|                                                                                     | 12.5          | 5.5                   | 9 –                        | 12.5                                  | 163 | 100                             | J7MN-25-12E5 | 1    | 0.32           |
|                                                                                     | 16            | 7.5                   | 11 –                       | 16                                    | 208 | 50                              | J7MN-25-16   | 1    | 0.32           |
|                                                                                     | 20            | -                     | 14 –                       | 20                                    | 260 | 50                              | J7MN-25-20   | 1    | 0.32           |
|                                                                                     | 22            | -                     | 17 –                       | 22                                    | 286 | 50                              | J7MN-25-22   | 1    | 0.32           |
|                                                                                     | 25            | 11                    | 20 –                       | 25                                    | 325 | 50                              | J7MN-25-25   | 1    | 0.32           |
| Circuit-Breakers J7MN-50                                                            |               |                       |                            |                                       |     |                                 |              |      |                |
|  | 25            | 11                    | 18 –                       | 25                                    | 325 | 50                              | J7MN-50-25   | 1    | 0.96           |
|                                                                                     | 32            | 15                    | 22 –                       | 32                                    | 416 | 50                              | J7MN-50-32   | 1    | 0.96           |
|                                                                                     | 40            | 18.5                  | 28 –                       | 40                                    | 520 | 50                              | J7MN-50-40   | 1    | 0.96           |

\*1) Recommended values for standard motors

## Accessories

|                                                                                           | Description                                                                                                                                                                                                               | Version                                                           | for circuit breaker | Type               | Pack pcs. | Weight approx. kg/pcs. |
|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------|--------------------|-----------|------------------------|
| <b>Transverse auxiliary contact block</b>                                                 |                                                                                                                                                                                                                           |                                                                   |                     |                    |           |                        |
|          | Contact block                                                                                                                                                                                                             | 1NO + 1NC                                                         | all                 | <b>J73MN-11F</b>   | 10        | 0.02                   |
| <b>Auxiliary contact block for left hand side mounting (max 1pc. per circuit breaker)</b> |                                                                                                                                                                                                                           |                                                                   |                     |                    |           |                        |
|          | Contact block                                                                                                                                                                                                             | 1NO + 1NC 9 mm                                                    | all                 | <b>J73MN-11S</b>   | 10        | 0.03                   |
| <b>Signalling switch for left hand side mounting (max 1pc. per circuit breaker)</b>       |                                                                                                                                                                                                                           |                                                                   |                     |                    |           |                        |
|          | Signalling switch                                                                                                                                                                                                         | 1NO + 1NC each<br>Individual tripped and short-circuit signalling | J7MN-25<br>J7MN-50  | <b>J73MN-T-11S</b> | 1         | 0.07                   |
| <b>Auxiliary releases for right hand side mounting (max 1pc. per circuit breaker)</b>     |                                                                                                                                                                                                                           |                                                                   |                     |                    |           |                        |
|         | <b>Undervoltage release</b><br>Trips the circuit-breaker when the voltage is interrupted. Prevents the motor from being restarted accidentally when the voltage is restored, suitable for EMERGENCY STOP acc. to VDE 0113 | AC 50 Hz 230 V<br>AC 60 Hz 240 V                                  | all                 | <b>J74MN-U-N1</b>  | 1         | 0.12                   |
|        | <b>Shunt release</b><br>Trips the circuit-breaker when the release coil energized.                                                                                                                                        | 50/60 Hz 100% ON 210-240 V<br>50/60 Hz, DC 5 sec ON 190-330 V     | all                 | <b>J74MN-S-N2</b>  | 1         | 0.11                   |

## Enclosures and Front Plates

|                                                                                     | Description                                                                               | Version                                                                            | for circuit breaker | Type              | Pack pcs. | Weight approx. kg/pcs. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------|-------------------|-----------|------------------------|
| <b>Front Plates</b>                                                                 |                                                                                           |                                                                                    |                     |                   |           |                        |
|  | <b>Moulded plastic front plate</b> with actuator diaphragm and holder for circuit breaker | for actuation of circuit-breakers in any enclosure protection degree IP55          | J7MN-12             | <b>J74MN-P12</b>  | 1         | 0.08                   |
|                                                                                     | <b>Moulded plastic front plate</b> with rotary operating mechanism lockable               | for actuation of circuit-breakers in any enclosure protection degree IP55          | J7MN-25<br>J7MN-50  | <b>J74MN-P25</b>  | 1         | 0.08                   |
|                                                                                     | <b>Holder for front plate</b> J74MN-P25                                                   | Holder is mounted on front plate, circuit-breaker (with accessories) is snapped on | J7MN-25             | <b>J74MN-PH</b>   | 1         | 0.12                   |
| <b>Enclosures</b>                                                                   |                                                                                           |                                                                                    |                     |                   |           |                        |
|  | <b>Moulded plastic enclosure</b> with actuator diaphragm knockouts for J7MN-25 sealable   | protection degree IP55 with N- and PE- terminal (+ aux. contact + release)         | J7MN-12             | <b>J74MN-PF12</b> | 1         | 0.27                   |

|                                                                                   | Description                                                                                     | Version                                                                    | for circuit breaker | Type              | Pack pcs. | Weight approx. kg/pcs. |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|---------------------|-------------------|-----------|------------------------|
|  | <b>Moulded plastic enclosure</b> with rotary operating mechanism knockouts for J7MN-25 lockable | protection degree IP55 with N- and PE- terminal (+ aux. contact + release) | J7MN-25             | <b>J74MN-PF25</b> | 1         | 0.30                   |

#### Door-coupling mechanisms

|                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                             |                                                |                    |                    |   |     |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------|--------------------|---|-----|
|  | The door-coupling rotary operating mechanisms consist of a knob, a coupling driver and a extension shaft (5 mm x 5 mm). The door-coupling rotary operating mechanisms are designed for degree of protection IP 65. The door locking device prevents accidental opening of the cubicle door in the ON position of the circuit-breaker. The OFF position can be locked with up to 3 padlocks. |                                                |                    |                    |   |     |
|                                                                                   | <b>Door-coupling rotary mechanism black</b>                                                                                                                                                                                                                                                                                                                                                 | extension shaft 330 mm with supporting bracket | J7MN-25 to J7MN-50 | <b>J74MN-DC-B</b>  | 1 | 0.3 |
|                                                                                   | <b>Emergency-Stop Door-coupling rotary mechanism red/yellow</b>                                                                                                                                                                                                                                                                                                                             | extension shaft 330 mm with supporting bracket | J7MN-25 to J7MN-50 | <b>J74MN-DC-RY</b> | 1 | 0.3 |

#### Busbars

|                                                                                                                                                                                                                                    | Description                                                                                                                               | Version                                                                                              | for circuit breaker | Type                                                                                     | Pack pcs.        | Weight approx. kg/pcs.       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------|------------------|------------------------------|
| <b>Insulated 3-phase busbar systems</b>                                                                                                                                                                                            |                                                                                                                                           |                                                                                                      |                     |                                                                                          |                  |                              |
|                                                                                                                                                   | For feeding several modular circuit-breakers on standard mounting rails, insulated, shock-protected. Rated operational voltage max. 690 V |                                                                                                      |                     |                                                                                          |                  |                              |
|                                                                                                                                                                                                                                    | <b>3-phase busbars</b> modular spacing 45 mm                                                                                              | for 2 circuit-breakers<br>for 3 circuit-breakers<br>for 4 circuit-breakers<br>for 5 circuit-breakers | J7MN-12<br>J7MN-25  | <b>J74MN-L3-1/2</b><br><b>J74MN-L3-1/3</b><br><b>J74MN-L3-1/4</b><br><b>J74MN-L3-1/5</b> | 1<br>1<br>1<br>1 | 0.03<br>0.05<br>0.07<br>0.10 |
| For connecting the 3-phase busbars from circuit-breakers different sizes. Clamping together J7MN-12 and J7MN-25 circuit-breakers is not possible due to the different modular spacings and the different heights of the terminals. |                                                                                                                                           |                                                                                                      |                     |                                                                                          |                  |                              |
|                                                                                                                                                 | <b>Line side terminal</b> 3-pole, connection from top                                                                                     | Conductor cross-section solid or stranded 6- 25 mm <sup>2</sup> with ferrule 4-16 mm <sup>2</sup>    | J7MN-12<br>J7MN-25  | <b>J74MN-TC12</b><br><b>J74MN-TC25</b>                                                   | 1<br>1           | 0.04<br>0.04                 |
|                                                                                                                                                                                                                                    | <b>Shroud</b>                                                                                                                             | for unused terminals                                                                                 | J7MN-12<br>J7MN-25  | <b>J74MN-DS</b>                                                                          | 20               | -                            |

#### Mounting Parts for Fuseless Load Feeders

|                                                                                     | Description                                                                           | Version                                                          | for circuit breaker | Type                                     | Pack pcs. | Weight approx. kg/pcs. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------|------------------------------------------|-----------|------------------------|
| <b>DIN-rail adapters</b>                                                            |                                                                                       |                                                                  |                     |                                          |           |                        |
|  | <b>Adapter</b> for mechanical fixing of circuit-breaker and contactor                 | 35 mm-DIN-rail (DIN EN50022) or screw mounting                   | J7MN-12<br>J7MN-25  | <b>J74MN-HU</b>                          | 10        | 0.05                   |
| <b>Link modules</b>                                                                 |                                                                                       |                                                                  |                     |                                          |           |                        |
|  | for mechanical fixing and electrical connection between circuit-breaker and contactor |                                                                  |                     |                                          |           |                        |
|                                                                                     | <b>Link module</b>                                                                    | up to 20 A<br>up to 32 A                                         | J7MN-12<br>J7MN-25  | <b>J74KN-VD-12</b><br><b>J74KN-VD-25</b> | 10<br>10  | -<br>-                 |
| <b>Terminal block</b>                                                               |                                                                                       |                                                                  |                     |                                          |           |                        |
|  | with increased creepage distances and clearances acc. to cULus Type „E“               |                                                                  |                     |                                          |           |                        |
|                                                                                     | <b>Terminal block</b>                                                                 | up to 600 V acc. to UL 489 not for transverse aux. contact block | J7MN-25             | <b>J74MN-TB25</b>                        | 1         | 0.12                   |

# Specifications

## ■ Engineering data and Characteristics

### Components for Fuseless Load Feeders, DIN-Rail Mounting

Type of coordination „1“ 3 x 415 V 10 kA (other conditions on request)

| Motor<br>3~400V<br>kW | Setting range<br>A |      | Circuit-breaker<br>page 66<br>Type | Contactors<br>220-230V 50Hz<br>Type | Link<br>module<br>Type | DIN-rail<br>adapter<br>Type |
|-----------------------|--------------------|------|------------------------------------|-------------------------------------|------------------------|-----------------------------|
| -                     | 0.11-              | 0.16 | J7MN-25-E16                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| -                     | 0.14-              | 0.2  | J7MN-25-E2                         | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.06                  | 0.18-              | 0.25 | J7MN-25-E25                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.09                  | 0.22-              | 0.32 | J7MN-25-E32                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| -                     | 0.28-              | 0.4  | J7MN-25-E4                         | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.12                  | 0.35-              | 0.5  | J7MN-25-E5                         | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.18                  | 0.45-              | 0.63 | J7MN-25-E63                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| -                     | 0.55-              | 0.8  | J7MN-25-E8                         | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.25                  | 0.7-               | 1    | J7MN-25-1                          | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.37                  | 0.9-               | 1.25 | J7MN-25-1E25                       | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.55                  | 1.1-               | 1.6  | J7MN-25-1E6                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 0.75                  | 1.4-               | 2    | J7MN-25-2                          | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| -                     | 1.8-               | 2.5  | J7MN-25-2E5                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 1.1                   | 2.2-               | 3.2  | J7MN-25-3E2                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 1.5                   | 2.8-               | 4    | J7MN-25-4                          | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| -                     | 3.5-               | 5    | J7MN-25-5                          | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 2.2                   | 4.5-               | 6.3  | J7MN-25-6E3                        | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 3                     | 5.5-               | 8    | J7MN-25-8                          | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 4                     | 7-                 | 10   | J7MN-25-10                         | J7KN-10-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 5.5                   | 9-                 | 12.5 | J7MN-25-12E5                       | J7KN-14-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| 7.5                   | 11-                | 16   | J7MN-25-16                         | J7KN-18-10 230                      | J74MN-12 VD            | J74MN-HU                    |
| -                     | 14-                | 20   | J7MN-25-20                         | J7KN-22-10 230                      | J74MN-25 VD            | J74MN-HU                    |
| -                     | 17-                | 22   | J7MN-25-22                         | J7KN-22-10 230                      | J74MN-25 VD            | J74MN-HU                    |
| 11                    | 20-                | 25   | J7MN-25-25                         | J7KN-22-10 230                      | J74MN-25 VD            | J74MN-HU                    |

# Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

This table shows the rated ultimate short-circuit breaking capacity  $I_{cu}$  and the rated service short-circuit breaking capacity  $I_{cs}$  of the J7MN circuit-breakers with different operational voltages as a function of the rated current  $I_n$  of the circuit-breakers.

The circuit-breakers can be fed at the top or bottom supply terminals without any reduction of the rated data.

If the short-circuit current exceeds the rated short-circuit breaking capacity of the circuit-breaker specified in the tables at the installation point, a back-up fuse is to be used.

The maximum rated current for the back-up fuse is specified in the tables. These fuses are only suitable for the short-circuit-currents as indicated on the fuses.

| Circuit-breaker Type | Rated current $I_n$<br>A | up to AC 240V <sup>*1</sup> |                |                              | up to AC 400V <sup>*1</sup><br>up to AC 415V <sup>*2</sup> |                |                              | up to AC 440V <sup>*1</sup><br>up to AC 460V <sup>*2</sup> |                |                              | up to AC 500V <sup>*1</sup><br>up to AC 525V <sup>*2</sup> |                |                              | up to AC 690V <sup>*1</sup> |                |                              |
|----------------------|--------------------------|-----------------------------|----------------|------------------------------|------------------------------------------------------------|----------------|------------------------------|------------------------------------------------------------|----------------|------------------------------|------------------------------------------------------------|----------------|------------------------------|-----------------------------|----------------|------------------------------|
|                      |                          | $I_{cu}$<br>kA              | $I_{cs}$<br>kA | max.<br>fuse<br>(gL/gG)<br>A | $I_{cu}$<br>kA                                             | $I_{cs}$<br>kA | max.<br>fuse<br>(gL/gG)<br>A | $I_{cu}$<br>kA                                             | $I_{cs}$<br>kA | max.<br>fuse<br>(gL/gG)<br>A | $I_{cu}$<br>kA                                             | $I_{cs}$<br>kA | max.<br>fuse<br>(gL/gG)<br>A | $I_{cu}$<br>kA              | $I_{cs}$<br>kA | max.<br>fuse<br>(gL/gG)<br>A |
| J7MN-12              | 0.16 to 0.8              | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                         | 100            | --                           |
|                      | 1                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                         | 100            | --                           |
|                      | 1.25                     | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 2                           | 2              | 20                           |
|                      | 1.6                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 2                           | 2              | 20                           |
|                      | 2                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 10                                                         | 10             | 35                           | 2                           | 2              | 35                           |
|                      | 2.5                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 10                                                         | 10             | 35                           | 2                           | 2              | 35                           |
|                      | 3.2                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 10                                                         | 10             | 40                           | 3                                                          | 3              | 40                           | 2                           | 2              | 40                           |
|                      | 4                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 10                                                         | 10             | 40                           | 3                                                          | 3              | 40                           | 2                           | 2              | 40                           |
|                      | 5                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 10                                                         | 10             | 50                           | 3                                                          | 3              | 50                           | 2                           | 2              | 50                           |
|                      | 6.3                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 10                                                         | 10             | 50                           | 3                                                          | 3              | 50                           | 2                           | 2              | 50                           |
|                      | 8                        | 100                         | 100            | --                           | 50                                                         | 12.5           | 80 <sup>*3</sup>             | 10                                                         | 10             | 63                           | 3                                                          | 3              | 63                           | 2                           | 2              | 63                           |
|                      | 10                       | 100                         | 100            | --                           | 50                                                         | 12.5           | 80 <sup>*3</sup>             | 10                                                         | 10             | 63                           | 3                                                          | 3              | 63                           | 2                           | 2              | 63                           |
|                      | 12                       | 100                         | 100            | --                           | 50                                                         | 12.5           | 80 <sup>*3</sup>             | 10                                                         | 10             | 80                           | 3                                                          | 3              | 80                           | 2                           | 2              | 80                           |
| J7MN-25              | 0.16 to 1.25             | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                         | 100            | --                           |
|                      | 1.6                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                         | 100            | --                           |
|                      | 2                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 8                           | 8              | 25                           |
|                      | 2.5                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 8                           | 8              | 25                           |
|                      | 3.2                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 8                           | 8              | 32                           |
|                      | 4                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 6                           | 3              | 32                           |
|                      | 5                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 6                           | 3              | 32                           |
|                      | 6.3                      | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 100                                                        | 100            | --                           | 6                           | 3              | 50                           |
|                      | 8                        | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 50                                                         | 25             | 63 <sup>*3</sup>             | 42                                                         | 21             | 63                           | 6                           | 3              | 50                           |
|                      | 10                       | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 50                                                         | 25             | 80 <sup>*3</sup>             | 42                                                         | 21             | 63                           | 6                           | 3              | 50                           |
|                      | 12.5                     | 100                         | 100            | --                           | 100                                                        | 100            | --                           | 50                                                         | 25             | 80 <sup>*3</sup>             | 42                                                         | 21             | 80                           | 6                           | 3              | 63                           |
|                      | 16                       | 100                         | 100            | --                           | 50                                                         | 25             | 100 <sup>*3</sup>            | 20                                                         | 10             | 80                           | 10                                                         | 5              | 80                           | 4                           | 2              | 63                           |
|                      | 20                       | 100                         | 100            | --                           | 50                                                         | 25             | 125 <sup>*3</sup>            | 20                                                         | 10             | 80                           | 10                                                         | 5              | 80                           | 4                           | 2              | 63                           |
|                      | 22                       | 100                         | 100            | --                           | 50                                                         | 25             | 125 <sup>*3</sup>            | 20                                                         | 10             | 100                          | 10                                                         | 5              | 80                           | 4                           | 2              | 63                           |
|                      | 25                       | 100                         | 100            | --                           | 50                                                         | 25             | 125 <sup>*3</sup>            | 20                                                         | 10             | 100                          | 10                                                         | 5              | 80                           | 4                           | 2              | 63                           |
| J7MN-50              | 25                       | 100                         | 100            | --                           | 50                                                         | 25             | 125 <sup>*3</sup>            | 30                                                         | 15             | 100                          | 12                                                         | 6              | 80                           | 5                           | 3              | 63                           |
|                      | 32                       | 100                         | 100            | --                           | 50                                                         | 25             | 125 <sup>*3</sup>            | 30                                                         | 15             | 125                          | 10                                                         | 5              | 100                          | 4                           | 2              | 63                           |
|                      | 40                       | 100                         | 100            | --                           | 50                                                         | 25             | 160 <sup>*3</sup>            | 30                                                         | 15             | 125                          | 10                                                         | 5              | 100                          | 4                           | 2              | 63                           |

\*1) 10% overvoltage

\*2) 5% overvoltage

\*3) Back-up fuse required if short-circuit current at installation point > 50 kA

-- No back-up fuse required.



**Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660**
**Main Circuit**

| Type                                                                                        |                                 |    | J7MN-12                                                          | J7MN-25 | J7MN-50             |
|---------------------------------------------------------------------------------------------|---------------------------------|----|------------------------------------------------------------------|---------|---------------------|
| Number of poles                                                                             |                                 |    | 3                                                                | 3       | 3                   |
| Max. rated current Inmax (=max. rated operational current Ie)                               | A                               |    | 12                                                               | 25      | 50                  |
| Permissible ambient temperature                                                             |                                 |    |                                                                  |         |                     |
| Storage/transport                                                                           | °C                              |    | -50 to +80                                                       |         |                     |
| Operation                                                                                   | °C                              |    | -20 to +70 <sup>*1</sup>                                         |         |                     |
| Permissible rated current at temperature inside cubicle of:                                 | +60 °C                          | %  | 100                                                              |         |                     |
|                                                                                             | +70 °C                          | %  | 87                                                               |         |                     |
| Circuit-breaker inside enclosure                                                            |                                 |    |                                                                  |         |                     |
| Permissible rated current at temperature inside enclosure of:                               | +60 °C                          | %  | 100                                                              |         |                     |
|                                                                                             | +70 °C                          | %  | 87                                                               |         |                     |
| Rated operational voltage Ue                                                                | V                               |    | 690 <sup>*2</sup>                                                |         |                     |
| Rated frequency                                                                             | Hz                              |    | 50/60                                                            |         |                     |
| Rated insulation voltage Ui                                                                 | V                               |    | 690                                                              |         |                     |
| Rated impulse withstand voltage Uimp                                                        | kV                              |    | 6                                                                |         |                     |
| Utilization category                                                                        |                                 |    |                                                                  |         |                     |
| IEC 60 947-2 (circuit-breaker)                                                              |                                 |    | A                                                                |         |                     |
| IEC 60 947-4-1 (motor starter)                                                              |                                 |    | AC-3                                                             |         |                     |
| Class                                                                                       | acc. to IEC 60 947-4-1          |    | 10                                                               |         |                     |
| DC short-circuit breaking capacity (time constant t = 5 ms)                                 |                                 |    |                                                                  |         |                     |
| 1 conducting path DC 150 V                                                                  |                                 | kA | 10                                                               |         |                     |
| 2 conducting paths in series DC 300 V                                                       |                                 | kA | 10                                                               |         |                     |
| 3 conducting paths in series DC 450 V                                                       |                                 | kA | 10                                                               |         |                     |
| Power loss Pv per circuit-breaker<br>dependent on rated current In<br>(upper setting range) | In -> to 1.25 A                 | W  | 5                                                                | -       | -                   |
|                                                                                             | In -> 1.6 to 6.3 A              | W  | 6                                                                | -       | -                   |
|                                                                                             | In -> 8 to 12 A                 | W  | 7                                                                | -       | -                   |
| R per conducting path = P/(I² × 3)                                                          | In -> 1 to 6.3 A                | W  | -                                                                | 6       | -                   |
|                                                                                             | In -> 8 to 16 A                 | W  | -                                                                | 7       | -                   |
|                                                                                             | In -> 20 to 25 A                | W  | -                                                                | 8       | -                   |
|                                                                                             | In -> to 25 A                   | W  | -                                                                | -       | 12                  |
|                                                                                             | In -> 32 A                      | W  | -                                                                | -       | 15                  |
|                                                                                             | In -> 40 to 50 A                | W  | -                                                                | -       | 20                  |
|                                                                                             |                                 |    |                                                                  |         |                     |
| Shock resistance                                                                            | acc. to IEC 68 Part 2-27        | g  | 25                                                               | 25      | 25                  |
| Degree of protection                                                                        | acc. to IEC 60 529              |    | IP 20                                                            | IP 20   | IP 20 <sup>*3</sup> |
| Shock hazard protection                                                                     | acc. to DIN VDE 0106 Part 100   |    | safe against finger touch                                        |         |                     |
| Temperature compensation                                                                    | acc. to IEC 60 947-4-1 °C       |    | -20 to +60                                                       |         |                     |
| Phase failure sensitivity                                                                   | acc. to IEC 60 947-4-1          |    | yes                                                              |         |                     |
| Explosion protection                                                                        | acc. to EC Directive 94/191 EC  |    | yes <sup>*4</sup>                                                |         |                     |
| Isolator characteristics                                                                    | acc. to IEC 60 947-3            |    | yes                                                              |         |                     |
| Main and EM. STOP switch characteristics                                                    | acc. to IEC 60 204-1 (VDE 0113) |    | yes <sup>*5</sup>                                                |         |                     |
| Safe isolation between main and auxiliary<br>circuits                                       | acc. to DIN VDE 0106 Part 101   |    |                                                                  |         |                     |
|                                                                                             | up to 400 V + 10 %              |    | yes                                                              |         |                     |
|                                                                                             | up to 415 V+ 5 %                |    | yes                                                              |         |                     |
| Mechanical endurance                                                                        | operating cycles                |    | 100 000                                                          | 100 000 | 50 000              |
| Electrical endurance                                                                        |                                 |    | 100 000                                                          | 100 000 | 25 000              |
| Max. operating frequency per hour (motor starts)                                            | 1/h                             |    | 15                                                               | 15      | 15                  |
| Permissible mounting position                                                               |                                 |    | any. acc. to IEC 60 447 start command "I" right-hand side or top |         |                     |

\*1) Over +60°C current reduction

\*2) 500 V with moulded-plastic enclosure

\*3) Terminal compartment IP00

\*4) KEMA-test certification on request

\*5) With appropriate accessories

# Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

## Conductor cross-sections for main Circuit

| Type                                   |                 | J7MN-12           | J7MN-25         | J7MN-50           |
|----------------------------------------|-----------------|-------------------|-----------------|-------------------|
| Terminal type                          |                 | Screw-type        | Screw-type      | Box terminal      |
| Terminal screw                         |                 | Pozidriv size 2   | Pozidriv size 2 | Pozidriv size 2   |
| Tightening torque                      | Nm              | 0.8 to 1.2        | 2 to 2.5        | 3 to 4.5          |
| <b>Conductor cross-sections</b>        |                 |                   |                 |                   |
| solid                                  | mm <sup>2</sup> | 2 x (0.5 to 1.5)  | 2 x (1 to 2.5)  | 2 x (0.75 to 16)  |
|                                        | mm <sup>2</sup> | 2 x (0.75 to 2.5) | 2 x (2.5 to 6)  | —                 |
|                                        | mm <sup>2</sup> | 1 x (0.5 to 4)    |                 |                   |
| finely stranded with end ferrule       | mm <sup>2</sup> | 2 x (0.5 to 1.5)  | 2 x (1 to 2.5)  | 2 x (0.75 to 16)  |
|                                        | mm <sup>2</sup> | 2 x (0.75 to 2.5) | 2 x (2.5 to 6)  | 1 x (0.75 to 25)  |
|                                        | mm <sup>2</sup> |                   | 1 x (1 to 10)   |                   |
| stranded                               | mm <sup>2</sup> | 2 x (0.5 to 1.5)  | 2 x (1 to 2.5)  | 2 x (0.75 to 25)  |
|                                        | mm <sup>2</sup> | 2 x (0.75 to 2.5) | 2 x (2.5 to 6)  | 1 x (0.75 to 35)  |
|                                        | mm <sup>2</sup> | 1 x (0.5 to 4)    | 1 x (1 to 10)   |                   |
| AWG-wires, solid or stranded           | AWG             | 2 x (18 to 14)    | 2 x (14 to 10)  | 2 x (18 to 3)     |
|                                        | AWG             | —                 | —               | 1 x (18 to 2)     |
| conductor bar (number x width x thick) | mm              | —                 | —               | 2 x (6 x 9 x 0.8) |

# Technical Data according to IEC/EN 60947-1, 60947-2, 60947-4-1 and VDE 0660

## Auxiliary switches

| Switching capacity                                              |                                             |                    |                 | Control voltage                      |      |     |  |
|-----------------------------------------------------------------|---------------------------------------------|--------------------|-----------------|--------------------------------------|------|-----|--|
| Front transverse auxiliary switch with 1 NO + 1 NC              |                                             |                    |                 |                                      |      |     |  |
| Rated operational voltage U <sub>e</sub>                        | AC                                          | V                  | 24              | 230                                  |      |     |  |
| Rated operational current I <sub>e</sub> /AC-15                 |                                             | A                  | 2               | 0.5                                  |      |     |  |
| Rated operational current I <sub>e</sub> /AC-12 I <sub>th</sub> |                                             | A                  | 2.5             | 2.5                                  |      |     |  |
| Rated operational voltage U <sub>e</sub>                        | DC L/R 200 ms                               | V                  | 24              | 48                                   | 60   |     |  |
| Rated operational current I <sub>e</sub> /DC-13                 |                                             | A                  | 1               | 0.3                                  | 0.15 |     |  |
| Lateral auxiliary switch and signalling switch                  |                                             |                    |                 |                                      |      |     |  |
| Rated operational voltage U <sub>e</sub>                        | AC                                          | V                  | 24              | 230                                  | 400  | 690 |  |
| Rated operational current I <sub>e</sub> /AC-15                 |                                             | A                  | 6               | 6                                    | 3    | 1   |  |
| Rated operational current I <sub>e</sub> /AC-12 I <sub>th</sub> |                                             | A                  | 10              | 10                                   | 10   | 10  |  |
| Rated operational voltage U <sub>e</sub>                        | DC L/R 200 ms                               | V                  | 24              | 110                                  | 220  | 440 |  |
| Rated operational current I <sub>e</sub> /DC-13                 |                                             | A                  | 2               | 0.5                                  | 0.25 | 0.1 |  |
| Undervoltage release                                            | Power consumption                           | during pick-up     | VA/W            | 20.2/13                              |      |     |  |
|                                                                 |                                             | uninterrupted duty | VA/W            | 7.2/2.4                              |      |     |  |
|                                                                 | Response voltage                            | trip               | V               | 0.7 to 0.35 × U <sub>s</sub>         |      |     |  |
|                                                                 |                                             | pick-up            | V               | 0.85 to 1.1 × U <sub>s</sub>         |      |     |  |
|                                                                 | Max. opening time                           |                    | ms              | 20                                   |      |     |  |
| Shunt release                                                   | Power consumption                           | during pick-up     | AC VA/W         | 20.2/13                              |      |     |  |
|                                                                 |                                             |                    | DC W            | 13 to 80                             |      |     |  |
|                                                                 | Response voltage acc. to IEC 60 947-1, trip | V                  |                 | 0.7 to 1.1 × U <sub>s</sub>          |      |     |  |
|                                                                 | Max. opening time                           |                    | ms              | 20                                   |      |     |  |
| Short-circuit protection for auxiliary and control circuits     |                                             |                    |                 |                                      |      |     |  |
|                                                                 | Fuse                                        | gL/gG              | A               | 10                                   |      |     |  |
|                                                                 | Miniature circuit breaker C-characteristic  |                    | A               | 6 <sup>1</sup>                       |      |     |  |
| Conductor cross-sections for auxiliary and control circuits     |                                             |                    |                 | Screw-type Pozidriv size 2           |      |     |  |
|                                                                 | solid                                       |                    | mm <sup>2</sup> | 2 x (0.5 to 1.5) / 2 x (0.75 to 2.5) |      |     |  |
|                                                                 | finely stranded with ferrule                |                    | mm <sup>2</sup> | 2 x (0.5 to 1.5) / 2 x (0.75 to 2.5) |      |     |  |
|                                                                 | stranded                                    |                    | mm <sup>2</sup> | 2 x (0.5 to 1.5) / 2 x (0.75 to 2.5) |      |     |  |
|                                                                 | AWG-wires, solid or stranded                |                    | AWG             | 2 x (18 to 14)                       |      |     |  |

\*1) Prospective short-circuit current < 0.4 kA.

## Description

J7MN circuit-breakers are compact, current-limiting circuit-breakers which are optimised for load feeders. The circuit-breakers are used for switching and protecting three-phase induction motors of up to 18,5 kW at AC 400 V and for loads with rated currents of up to 40 A.

### Construction

The circuit-breakers are available in three sizes:

J7MN-12 overall width 45 mm. Max. rated current 12 A. Suitable for 3-phase induction motors of up to 5.5 kW at voltages of 400 V AC.

J7MN-25 overall width 45 mm. Max. rated current 25 A. Suitable for 3-phase induction motors of up to 11 kW at voltages of 400 V AC.

J7MN-50 overall width 55 mm. Max. rated current 40 A. Suitable for 3-phase induction motors of up to 18,5 kW at voltages of 400 V AC.

### Releases

Circuit-breakers J7MN are equipped with bimetallic-based, inverse-time delayed overload releases and with instantaneous overcurrent releases (electromagnetic short-circuit releases).

The overload releases can be set in accordance with the load current. The overcurrent releases are permanently set to a value 13 times the rated current and thus enable trouble-free start-up of motors.

The scale cover can be sealed to prevent unauthorized adjustments to the set current.

### Operating mechanisms

circuit-breakers J7MN-12 are actuated via a switch operating mechanism and circuit-breakers J7MN-25 and J7MN-50 via a rotary operating mechanism. If the circuit-breaker trips, the rotary operating mechanism switches to the tripped position to indicate this. Before the circuit-breaker is reclosed, the rotary operating mechanism must be reset to the 0 position by hand, in order to prevent the former from closing by mistake before the fault has been cleared.

In the case of circuit-breakers with rotary operating mechanisms, there is an electrical signal via a signalling switch to indicate that the circuit-breaker has tripped.

All operating mechanisms can be locked in the 0 position with a padlock (shackle diameter 3.5 to 4.5 mm).

The J7MN circuit-breakers fulfil the isolation characteristics specified in IEC 60 947-2.

### Operating conditions

Circuit-breakers J7MN are suitable for use in any climate. They are designed for operation in enclosed rooms under normal conditions (e. g. no dust, corrosive vapours or harmful gases). Suitable enclosures must be provided for installation in dusty or damp rooms.

Circuit-breakers J7MN can also be fed from below. The standards in accordance with which the circuit-breakers are constructed, the permissible ambient temperatures, the maximum making and breaking capacities, the tripping currents and other boundary conditions can be found in the technical data and tripping characteristics.

Since the operational currents, starting currents and current peaks vary as a result of the inrush current, even in the case of motors with identical output ratings, the values specified for these output ratings in the selection tables are intended as a guide only. The specific rated and start-up data of the motor to be protected is always paramount to the choice of the most suitable circuit-breaker.

In order to prevent premature tripping due to phase failure sensitivity, the circuit-breakers should always be connected in such a way that current flows through all three main conducting paths.

### Short-circuit protection

The short-circuit releases of J7MN circuit-breakers disconnect the faulty load feeder from the system in the event of a short circuit and thus prevent any further damage.

Circuit-breakers with a short-circuit breaking capacity of 50 kA or 100 kA at a voltage of 400 V AC are practically short-circuit-proof at this voltage, as higher short-circuit currents are not usually encountered at the installation point.

Back-up fuses are only necessary if the short-circuit current at the installation point exceeds the rated ultimate short-circuit breaking capacity of the circuit-breakers.

### Motor protection

The tripping characteristics of J7MN circuit-breakers are designed mainly to protect three-phase induction motors. The circuit-breakers are therefore also referred to as motor circuit-breakers. The current of the motor to be protected is set with the aid of the scale.

Circuit-breakers with thermal overload releases are normally designed in accordance with release Class 10.

### Line protection

J7MN circuit-breakers for motor protection are also suitable for line protection. In order to prevent premature tripping due to phase failure sensitivity, the three conducting paths must always be uniformly loaded. The conducting paths must be connected in series in the case of single-phase loads.

The J7MN circuit-breakers meet the isolation conditions of IEC 60 947-3 as well as the additional test conditions for circuit-breakers with isolation characteristics specified in IEC 60 947-2. Taking IEC 60 204-1 into consideration, they can thus be implemented as main and EMERGENCY STOP switches.

Door-coupling rotary operating mechanism do not fulfil the isolation characteristics specified in IEC 60 947-2. Door-coupling rotary operating mechanism according isolation characteristics specified in IEC 60 947-2 on request.

## Characteristics

The time/ current characteristic, the current limiting characteristics and the  $I^2t$  characteristics were determined in accordance with DIN VDE 0660 and IEC 60 947.

The tripping characteristic of the inverse-time delayed overload releases (thermal overload releases or 'a' releases) for DC and AC with a frequency of 0 to 400 Hz also apply to the time/current characteristic.

The characteristics apply to the cold state. At operating temperature, the tripping times of the thermal releases are reduced to approximately 25 %.

Under normal operating conditions, all three poles of the device must be loaded. The three main conducting paths must be connected in series in order to protect single-phase or DC loads.


With 3-pole loading, the maximum deviation in the tripping time for 3 times the setting current and upwards is  $\pm 20\%$  and thus in accordance with DIN VDE 0165.

The tripping characteristics for the instantaneous, electromagnetic overcurrent releases (short-circuit releases or 'n' releases) are based on the rated current  $I_n$ , which is also the maximum value of the setting range for circuit-breakers with adjustable overload releases. If the current is set to a lower value, the tripping current of the 'n' release is increased by a corresponding factor.

The characteristics of the electromagnetic overcurrent releases apply to frequencies of 50/60 Hz. **Appropriate correction factors must be used for lower frequencies up to 16 2/3 Hz, for higher frequencies up to 400 Hz and for DC.**

The characteristic shown here is a schematic representation of circuit-breakers for all ranges.

Time/current characteristics, current limiting characteristics and  $I^2t$  characteristics are available on request.

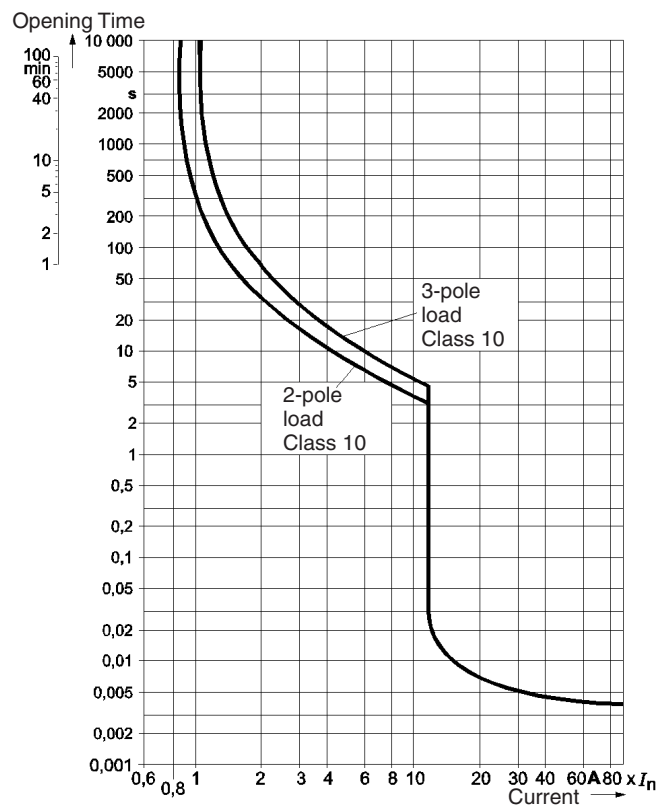


## Wiring diagrams


|                                                    |                                                                   |                                                                |
|----------------------------------------------------|-------------------------------------------------------------------|----------------------------------------------------------------|
| <b>Circuit-breaker</b><br><b>J7MN</b><br>          | <b>Transverse auxiliary contact block</b><br><b>J73MN-11F</b><br> | <b>Lateral auxiliary contact block</b><br><b>J73MN-11S</b><br> |
| <b>Signalling switch</b><br><b>J73MN-T-11S</b><br> | <b>Undervoltage release</b><br><b>J74MN-U</b><br>                 | <b>Shunt release</b><br><b>J74MN-S</b><br>                     |

# Dimensions


Circuit-breaker **J7MN-12**

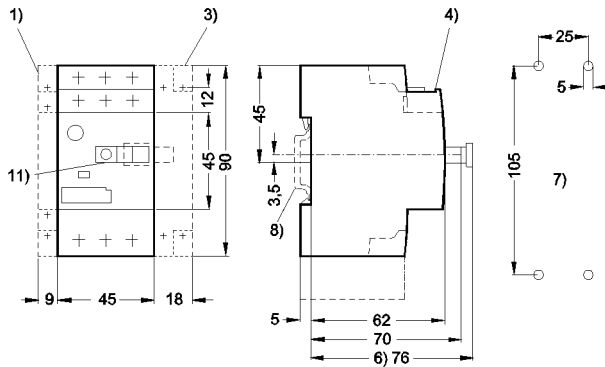

Circuit-breaker **J7MN-25**

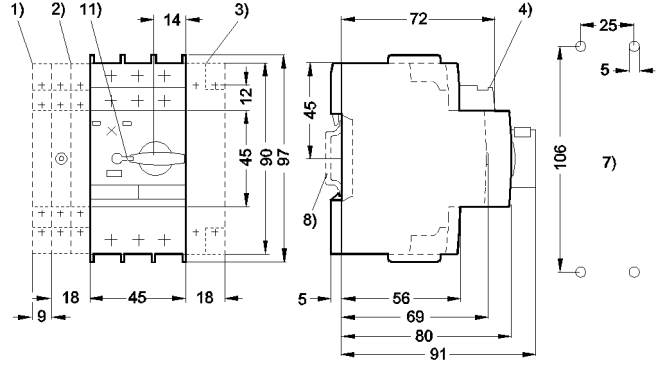


Circuit-breaker **J7MN-50**

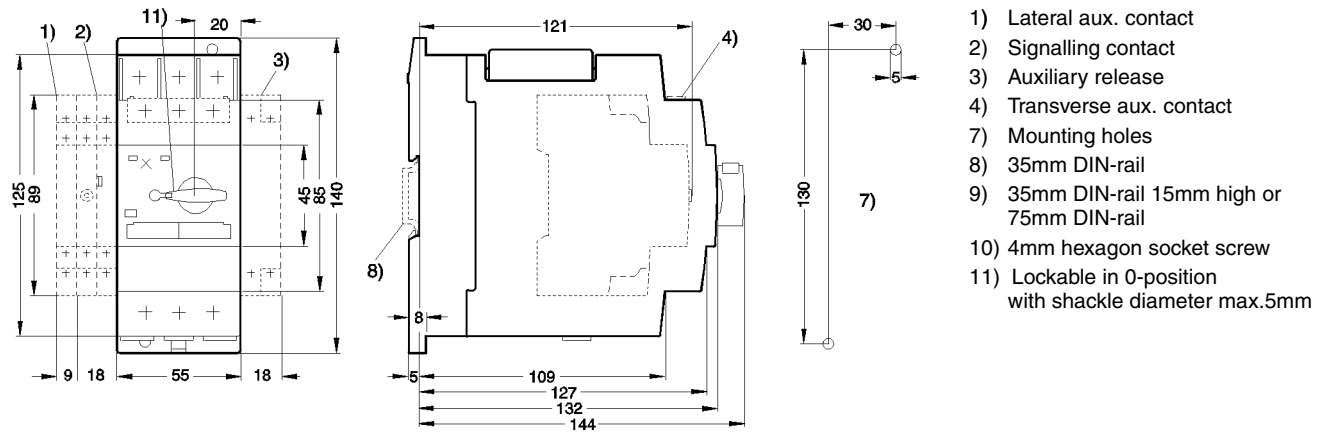


- 1) Lateral aux. contact
- 2) Signalling contact
- 3) Auxiliary release
- 4) Transverse aux. contact
- 7) Mounting holes
- 8) 35mm DIN-rail
- 9) 35mm DIN-rail 15mm high or 75mm DIN-rail
- 10) 4mm hexagon socket screw
- 11) Lockable in 0-position with shackle diameter max.5mm


Moulded plastic front plate **J74MN-P12**

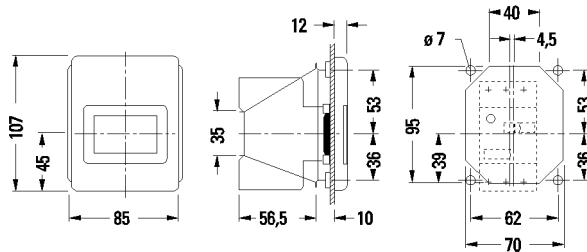


Moulded plastic front plate **J74MN-P25**

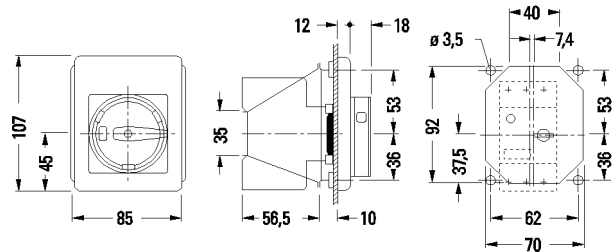

Moulded plastic enclosure **J74MN-PF12**

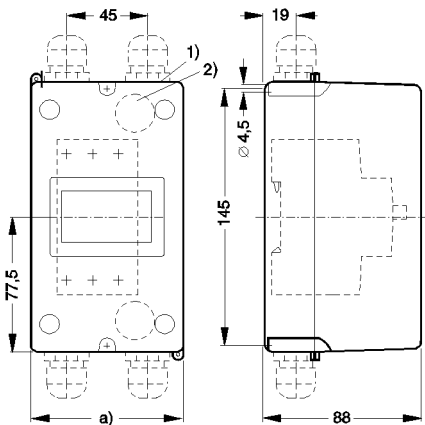


Door-coupling rotary operating mechanism **J74MN-DC**

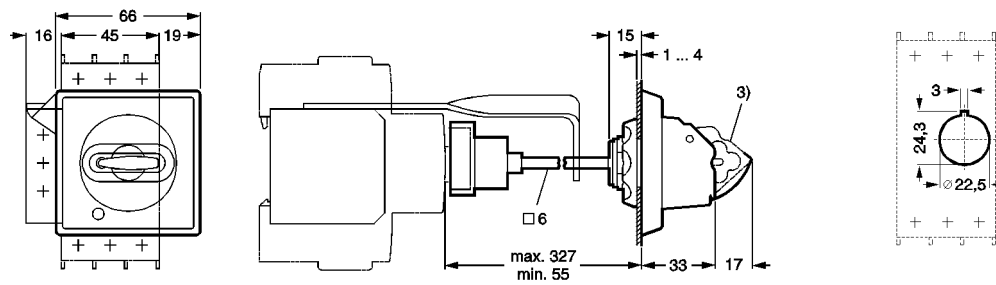


1) Max. for shackle diameter for padlock 8 mm

3-phase busbar **J74MN-L3-□/□**  
for J7MN-12 and J7MN-25, modular spacing 45 mm

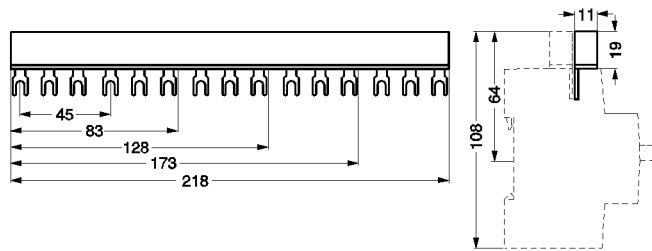

3-phase line-side terminal **J74MN-TC12** and **J74MN-TC25**



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.