

ADSL MAGNETICS

Through Hole Transformers

TM9957


- 2718AF2 and 2718AH2 operate over the frequency range from 1kHz to 1.1MHz
- 2718BK2 operates over the frequency range from 500Hz to 1.1MHz
- Designed for broadband applications
- Minimum interwinding breakdown voltage of 1500 Vrms
- Qualified per Bellcore TR-TSY-000357-1

ELECTRICAL SPECIFICATIONS at 25° C

Part Number	Turns Ratio ± 3%	Primary Inductance mH min	DCR Ω max		Insertion Loss dB typ	Frequency Response dB		Interwinding Capacitance pF max
	Pri : Sec		Pri	Sec		1kHz	1MHz	
2718AF2	1.0 : 1.0	25.5	2.80	2.30	0.20	0.50	0.50	7.0*
2718AH2	1.0 : 1.0	25.5	2.80	2.30	0.20	0.50	0.50	10.0
2718BK2	1.0 : 1.0	11.0	1.50	1.50	N/A	N/A	N/A	30

* Terminal 8 grounded


SCHEMATICS

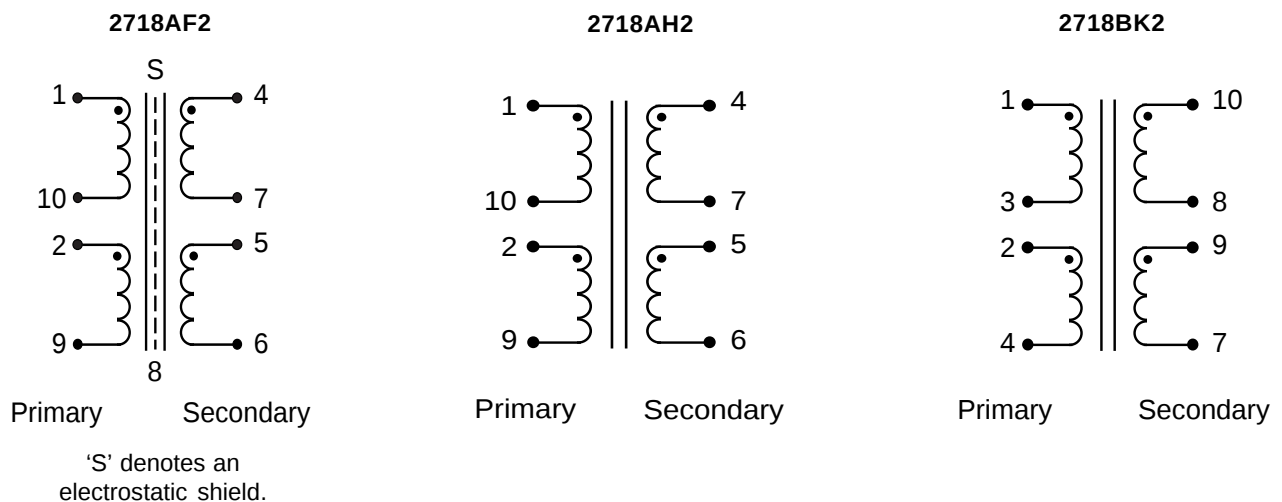

ADSL MAGNETICS Through Hole Transformers

MECHANICAL

2718AF2
2718AH2
2718BK2

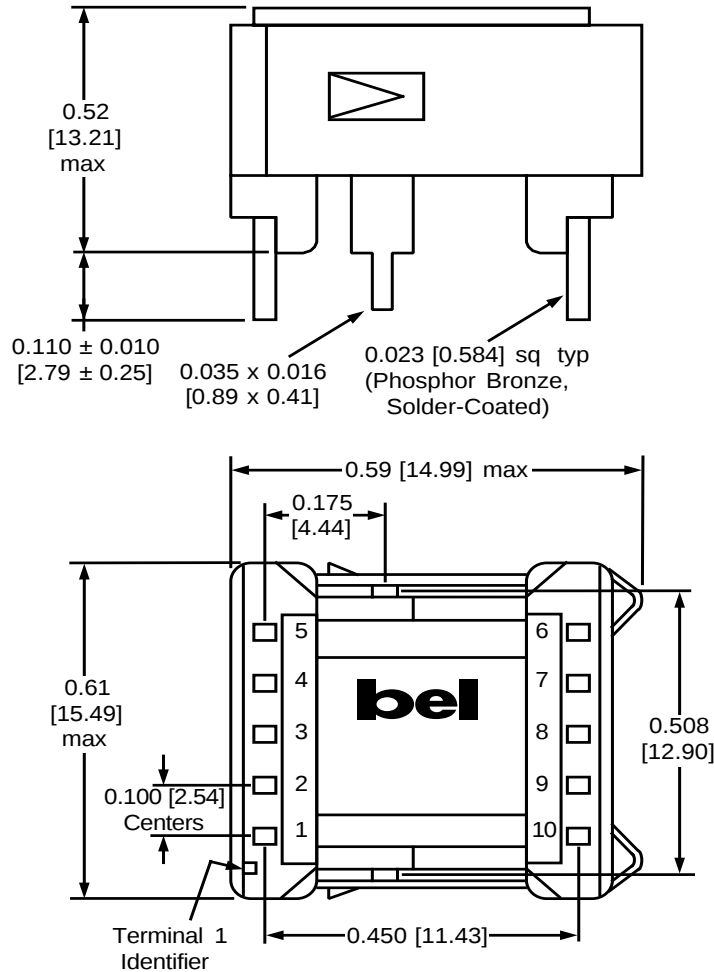

Note: Unless otherwise specified, dimensions are nominal and in inches [millimeters].

©1999 Bel Fuse Inc. Specifications subject to change without notice. 06.99

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

T515

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F23, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com