


RF & MICROWAVE TRANSISTORS GENERAL PURPOSE AMPLIFIER APPLICATIONS

- EMITTER BALLASTED
- REFRACTORY/GOLD METALLIZATION
- LOW THERMAL RESISTANCE
- HERMETIC STRIPAC® PACKAGE
- $P_{OUT} = 20 \text{ W MIN. WITH } 10 \text{ dB GAIN}$
@ 1 GHz



.230 2L STUD (S016)

hermetically sealed

ORDER CODE

MSC81020


BRANDING

81020

DESCRIPTION

The MSC81020 is a common base hermetically sealed silicon NPN microwave transistor utilizing a fishbone emitter ballasted geometry with a refractory/gold metallization system. This device is designed for Class C amplifier applications in the 0.4 - 1.2 GHz frequency range.

PIN CONNECTION

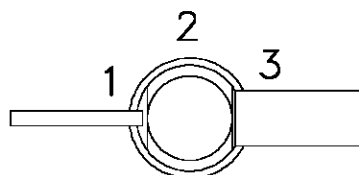

1. Collector

2. Base

3. Emitter

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}\text{C}$)

Symbol	Parameter	Value	Unit
P_{DISS}	Power Dissipation*	35	W
I_C	Device Current*	1.50	A
V_{CC}	Collector-Supply Voltage*	35	V
T_J	Junction Temperature	200	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	- 65 to +200	$^{\circ}\text{C}$

THERMAL DATA

$R_{TH(j-c)}$	Junction-Case Thermal Resistance*	5.0	$^{\circ}\text{C/W}$
---------------	-----------------------------------	-----	----------------------

*Applies only to rated RF amplifier operation

MSC81020

ELECTRICAL SPECIFICATIONS ($T_{\text{case}} = 25^{\circ}\text{C}$)

STATIC


Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
BV_{CBO}	$I_{\text{C}} = 5\text{mA}$ $I_{\text{E}} = 0\text{mA}$	45	—	—	V
BV_{EBO}	$I_{\text{E}} = 1\text{mA}$ $I_{\text{C}} = 0\text{mA}$	3.5	—	—	V
BV_{CER}	$I_{\text{C}} = 15\text{mA}$ $R_{\text{BE}} = 10\Omega$	45	—	—	V
I_{CBO}	$V_{\text{CB}} = 28\text{V}$	—	—	5.0	mA
h_{FE}	$V_{\text{CE}} = 5\text{V}$ $I_{\text{C}} = 1000\text{mA}$	15	—	120	—

DYNAMIC


Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
P_{OUT}	$f = 1.0\text{ GHz}$ $P_{\text{IN}} = 2.0\text{ W}$ $V_{\text{CC}} = 28\text{ V}$	20	21	—	W
η_{C}	$f = 1.0\text{ GHz}$ $P_{\text{IN}} = 2.0\text{ W}$ $V_{\text{CC}} = 28\text{ V}$	55	58	—	%
G_{P}	$f = 1.0\text{ GHz}$ $P_{\text{IN}} = 2.0\text{ W}$ $V_{\text{CC}} = 28\text{ V}$	10	10.2	—	dB
C_{OB}	$f = 1\text{ MHz}$ $V_{\text{CB}} = 28\text{ V}$	—	—	19	pF

TYPICAL PERFORMANCE


POWER OUTPUT vs FREQUENCY

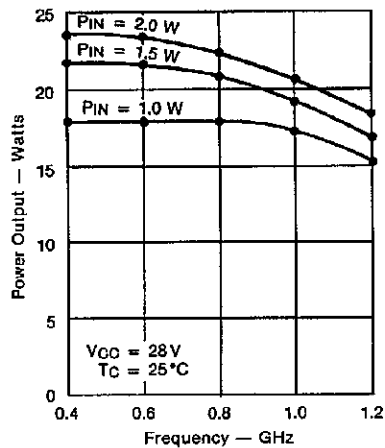


COLLECTOR EFFICIENCY vs FREQUENCY

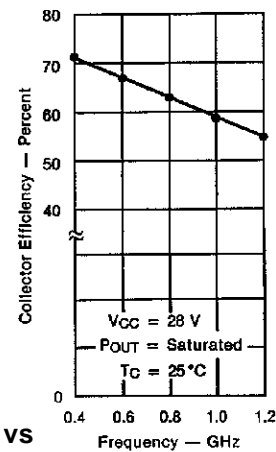


RELATIVE POWER OUTPUT vs COLLECTOR VOLTAGE

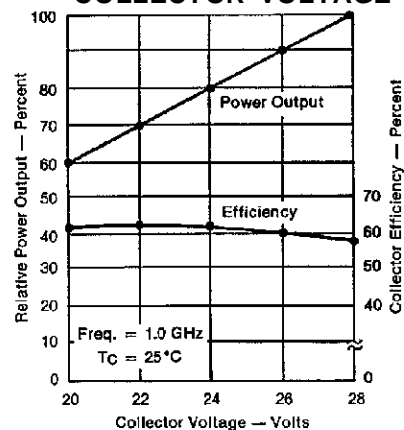


IMPEDANCE DATA

TYPICAL INPUT
IMPEDANCE


$P_{IN} = 3.0\text{ W}$
 $V_{CC} = 28\text{ V}$
 Normalized to 50 ohms

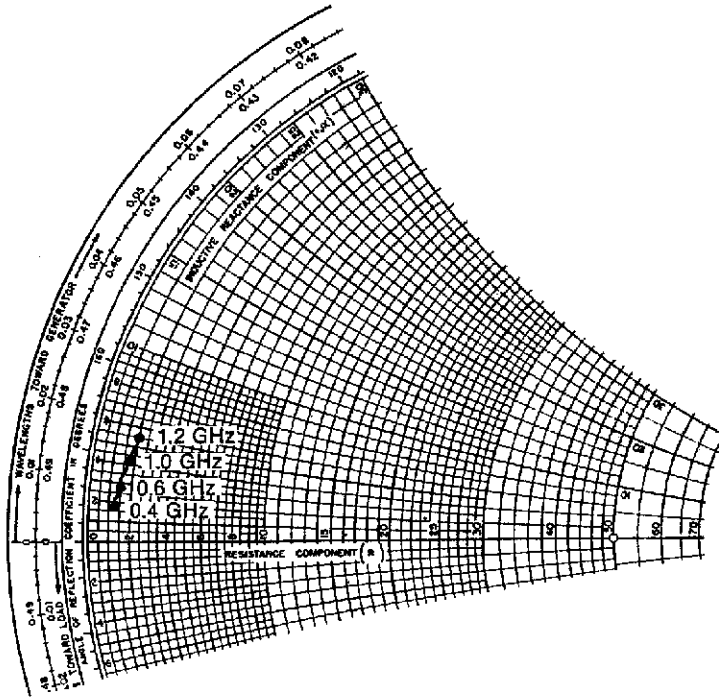

FREQ.	$Z_{IN} (\Omega)$	$Z_{CL} (\Omega)$
0.4 GHz	$1.3 + j 1.7$	$13.3 + j 9.8$
0.6 GHz	$1.5 + j 2.8$	$9.7 + j 7.0$
0.8 GHz	$1.6 + j 3.4$	$7.2 + j 4.0$
1.0 GHz	$1.8 + j 4.2$	$5.8 + j 2.0$
1.2 GHz	$2.0 + j 5.5$	$4.0 + j 1.0$

TYPICAL COLLECTOR
LOAD IMPEDANCE

$P_{OUT} = \text{Saturated}$
 $V_{CC} = 28\text{ V}$
 Normalized to 50 ohms

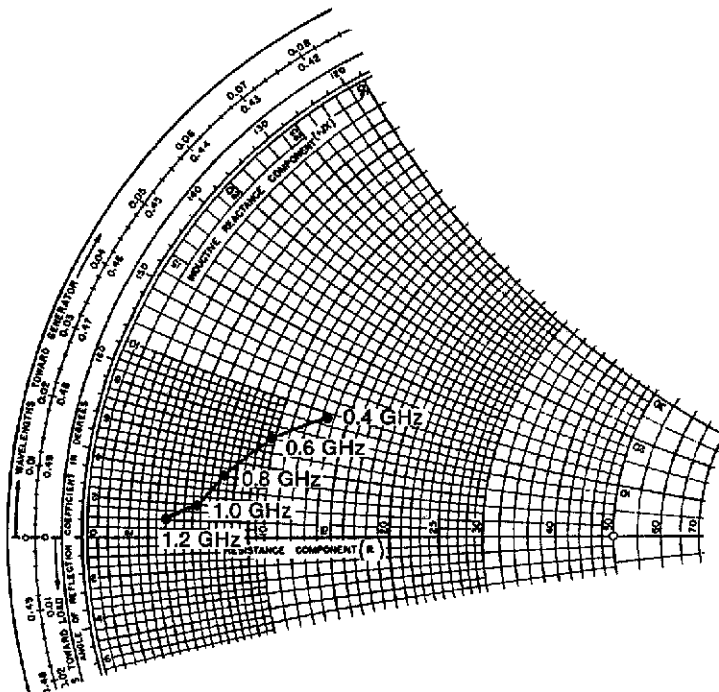

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A