



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		BA1	REVISED PER ECO-11-005150	28MAR2011	RK	HMR

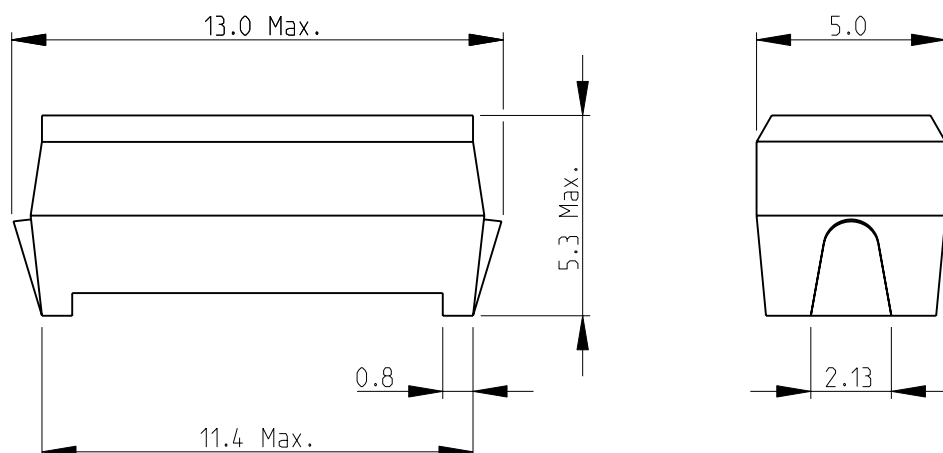


1 PACKAGING: SUPPLIED TAPED AND REELED ON 13" REELS IN QUANTITIES OF 1500 PIECES

2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3615 SERIES-HIGH CURRENT INDUCTOR SMD

RECOMMENDED LAND PATTERN

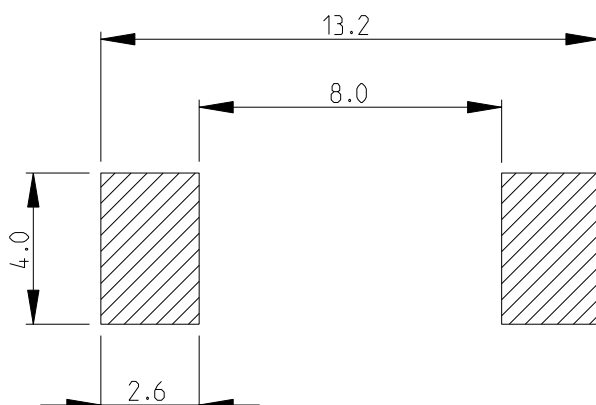

RoHS Compliant

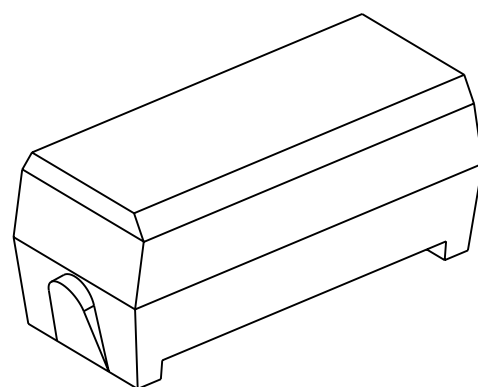

2008

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -

COPYRIGHT 2008



DIMENSIONS:		DWN	13-NOV-08	MATERIAL		FINISH							
mm		SUBHASH.M		-		-							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	13-NOV-08	TE Connectivity									
		PRAKASH.S											
		APVD	13-NOV-08										
0 PLC ±0.2		STEPHEN.P		NAME									
1 PLC ±0.1		PRODUCT SPEC											
2 PLC ±-		-											
3 PLC ±-		APPLICATION SPEC		HIGH CURRENT INDUCTOR SMD SERIES 3615									
4 PLC ±-		-											
ANGLES ±5°													
		WEIGHT	0.7g max.	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO						
				A 4	00779	©= 1624097	-						
CUSTOMER DRAWING						SCALE	5:1	SHEET	1	OF	1	REV	BA1