

Features

- ◆ 10 Watt in 1" x 1" package
- ◆ Shielded metal case with isolated baseplate
- ◆ Ultrawide 4:1 input voltage ranges
- ◆ Remote On/Off control
- ◆ Operating temp. range -40°C to $+75^{\circ}\text{C}$ and up to $+85^{\circ}\text{C}$ with heat-sink
- ◆ I/O isolation voltage 1500 VDC
- ◆ Input filter meets EN 55022 class A without external components
- ◆ Cost optimized design
- ◆ Industry standard pinout
- ◆ 3-year product warranty



The THL 10WI is a series of general purpose 10 Watt dc/dc-converters packed in the compact 1" x 1" case and is a pin to pin replacement for the popular 1" x 2" size products. The industrial standard pinout, the ultra wide 4:1 input voltage range and the input filter that meets EN 55022 Class A without external components make these converters easy to design in and suitable for to cost optimize many existing and new applications.

The models have a remote On/Off control, short circuit and overvoltage protection and are applicable in temperature ranges of up to $+75^{\circ}\text{C}$ or $+85^{\circ}\text{C}$ with optional mounted heat sink. Typical applications are instrumentation, distributed power architectures in communication and industrial electronics.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THL 10-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	2200 mA	86 %
THL 10-2411WI		5.1 VDC	2000 mA	84 %
THL 10-2412WI		12 VDC	830 mA	86 %
THL 10-2413WI		15 VDC	660 mA	87 %
THL 10-2415WI		24 VDC	410 mA	86 %
THL 10-2421WI		± 5.0 VDC	± 1000 mA	84 %
THL 10-2422WI		± 12 VDC	± 410 mA	86 %
THL 10-2423WI		± 15 VDC	± 330 mA	87 %
THL 10-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	2200 mA	85 %
THL 10-4811WI		5.1 VDC	2000 mA	84 %
THL 10-4812WI		12 VDC	830 mA	86 %
THL 10-4813WI		15 VDC	660 mA	87 %
THL 10-4815WI		24 VDC	410 mA	86 %
THL 10-4821WI		± 5.0 VDC	± 1000 mA	84 %
THL 10-4822WI		± 12 VDC	± 410 mA	86 %
THL 10-4823WI		± 15 VDC	± 330 mA	87 %

Input Specifications

Input current at no load (at nominal input voltage)	24 V models:	30 mA typ.
	48 V models:	20 mA typ.
Input current at full load (at nominal input voltage)	24 V; 3.3 VDC models:	400 mA typ.
	24 V; other models:	500 mA typ..
	48 V; 3.3 VDC models:	200 mA typ.
	48 V; other models:	250 mA typ.
Start-up voltage / under voltage lockout (hysteresis for assertive on)	24 V models:	9 VDC / 8.5 VDC (or lower)
	48 V models:	18 VDC / 17 VDC (or lower) (long term operation at undervoltage will damage the converter!)
Surge voltage (1 sec. max.)	24 Vin models:	50 V max.
	48 Vin models:	100 V max.
Conducted noise (input)	EN 55022 class A, FCC part 15, level A without external components	

Output Specifications

Voltage set accuracy	$\pm 2\%$	
Regulation	– Input variation ($V_{min} - V_{max}$)	1.0 % max.
	– Load variation	single output models: 1.2 % max. (15 – 100 % load)
		dual output models: 2.0 % max. (15 – 100 % balanced load)
Minimum load	15 % of rated max. current (operation at lower load condition will not damage the converters. However, they may not meet all listed specifications)	
Ripple and noise (20 MHz bandwidth)	60 mVp-p typ.	
Temperature coefficient	$\pm 0.02\%/K$	
Output current limitation	$>110\%$ of lout max.	
Short circuit protection	indefinite, automatic recovery	
Transient response setting time	300 μs typ. (25 % load step change)	
Maximum capacitive load	3.3 VDC models:	560 μF
	5 VDC models:	560 μF
	12 VDC models:	150 μF
	15 VDC models:	150 μF
	24 VDC models:	68 μF
	± 5.0 VDC models:	220 μF (each output)
	± 12 VDC models:	100 μF (each output)
	± 15 VDC models:	100 μF (each output)

General Specifications


Temperature ranges	– Operating without heat sink – Operating with heat sink – Case temperature – Storage	–40°C to +75°C (with derating) –40°C to +85°C (with derating) +100°C max. –40°C to +125°C
Power derating	– Operating without heat sink – Operating with heat sink	2.5 %/K above +60°C 3.5 %/K above +70°C
Thermal inpedance	– Natural convection – Natural convection with heat sink	18.2°C/W 15.8°C/W
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTTF (MIL-HDBK-217F, at +25°C, ground benign)		>350'000 h
Isolation voltage (60 sec.)	– Input/Output	1'500 VDC
Isolation capacitance	– Input/Output	1200 pF max.
Isolation resistance	– Input/Output (500 VDC)	>1'000 MOhm
Remote On/Off	– On: – Off: – Off idle current:	2.5 ... 50 VDC or open circuit 0 ... +1.0 VDC or short circuit pin 6 and pin 2 10 mA max.
Switching frequency (fixed)		400 kHz typ. (pulse width modulation PWM)
Safety standards		UL/cUL 60950-1, IEC/EN 60950-1
Safety approvals	– UL/cUL	www.ul.com -> File no. E188913 (entry pending)
Environmental compliance	– Reach – RoHS	www.tracopower.com/products/thl10wi-reach.pdf RoHS directive 2002/95/EC

Physical Specifications

Casing material	metal
Baseplate	non conductive FR4
Potting material	epoxy (UL 94V-0 rated)
Weight	15 g (0.53oz)
Soldering temperature	max. +260°C / 10sec.

Application note : www.tracopower.com/products/thl10wi-application.pdf

Outline Dimensions

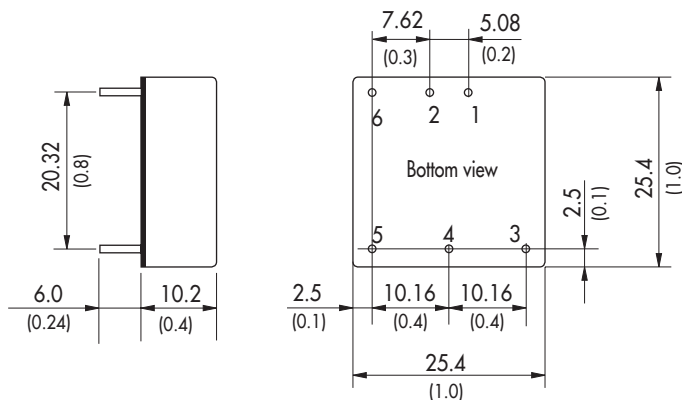

Pin-Out

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	-Vout	-Vout
6	Remote On/Off	

Dimensions in [mm], () = Inch
 Pin diameter $\varnothing$ 1.0 (0.04)
 Pin pitch tolerances: ± 0.25 (± 0.01)
 Tolerances: ± 0.5 (± 0.02)

Heat-Sink (Option)

Order code: THL-HS1

(cont.: heat-sink, thermal pad, 2 clamps)

Material: Aluminum

Finish: Anodic treatment (black)

Weight: 2.9 g (0.10 oz) without converter

Thermal impedance after assembling: 15.8 K/W






Note:

The product label on converter has to be removed before mounting the heat-sink.

For volume orders converters will be supplied with heat-sink already mounted. Please contact factory for quotation.

Separate heat-sinks are only available for prototypes and small quantity orders.

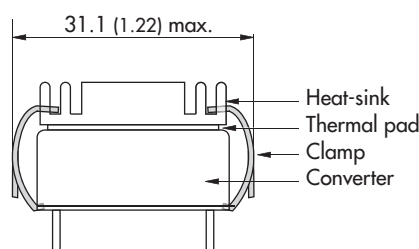

Specifications can be changed any time without notice.