



D

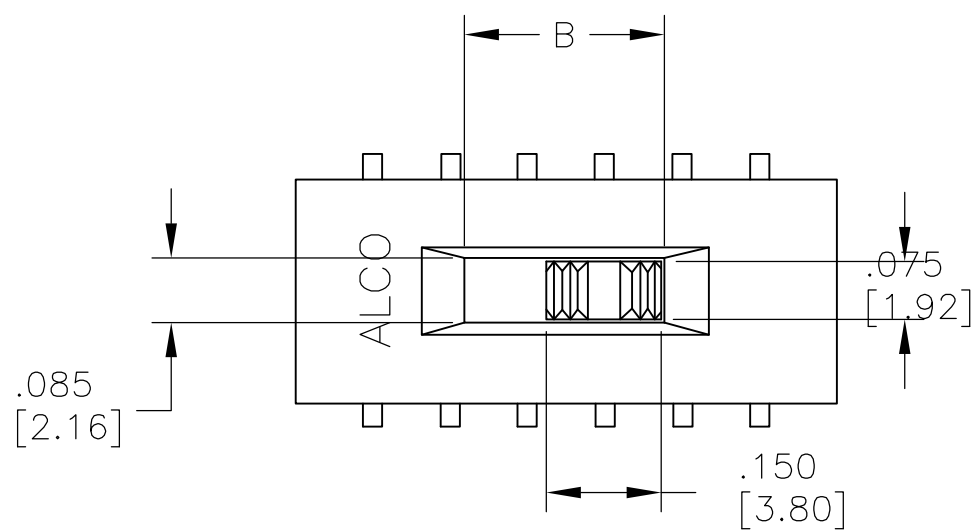


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

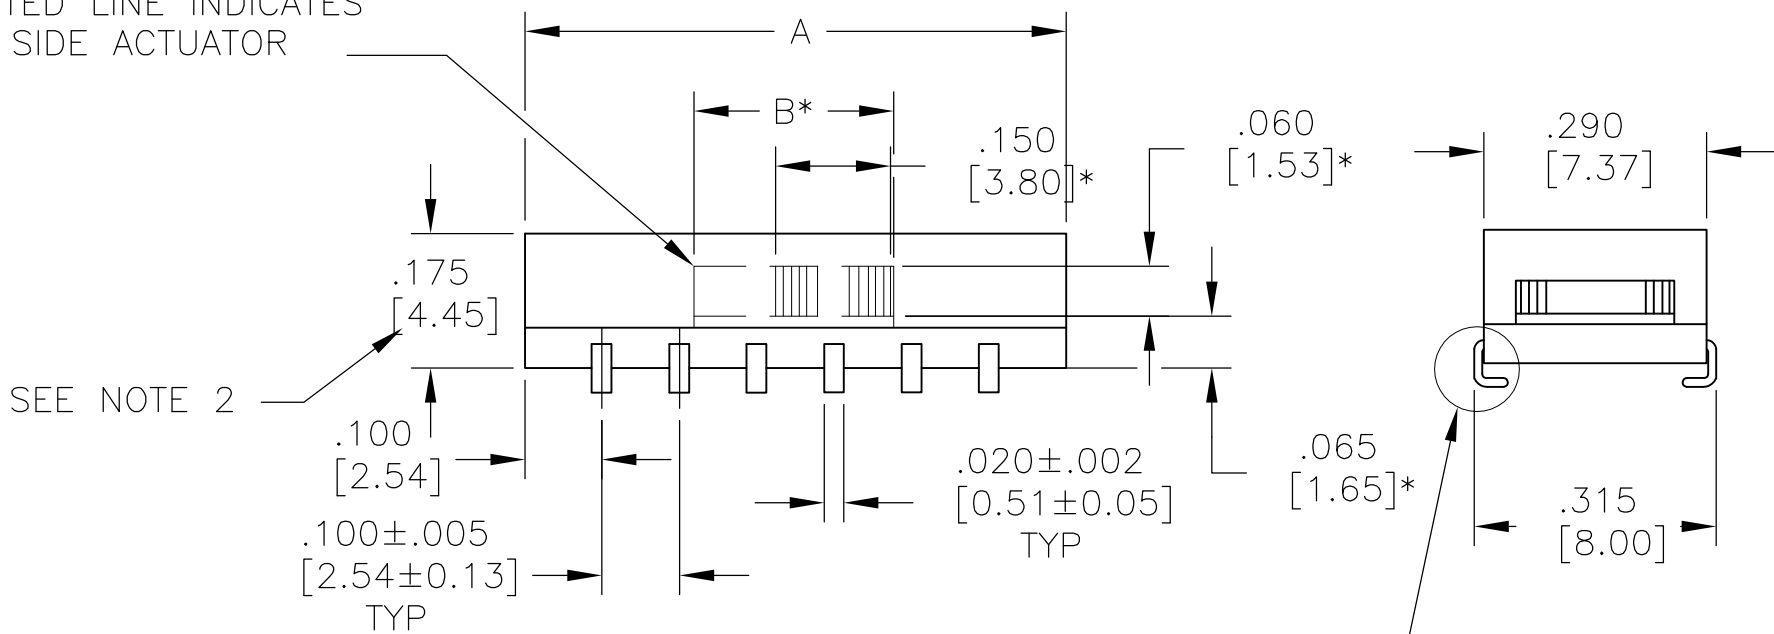


ASE

SEE NOTE A

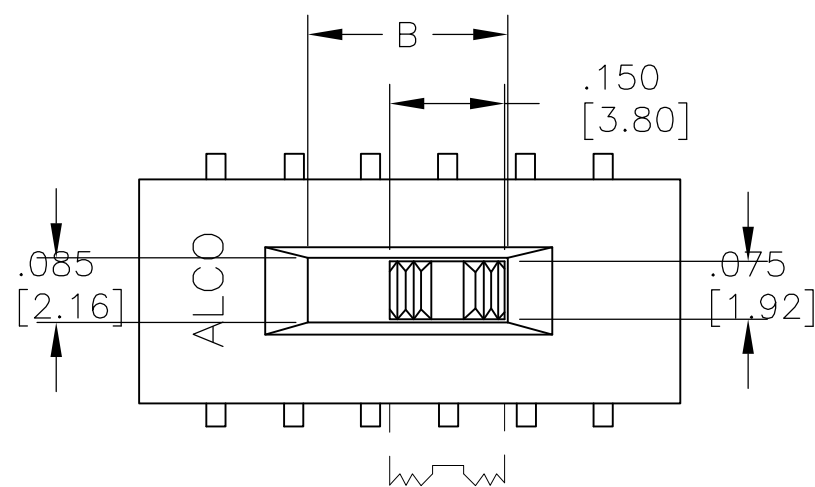

* SIDE ACTUATOR ONLY.


DOTTED LINE INDICATES
SIDE ACTUATOR

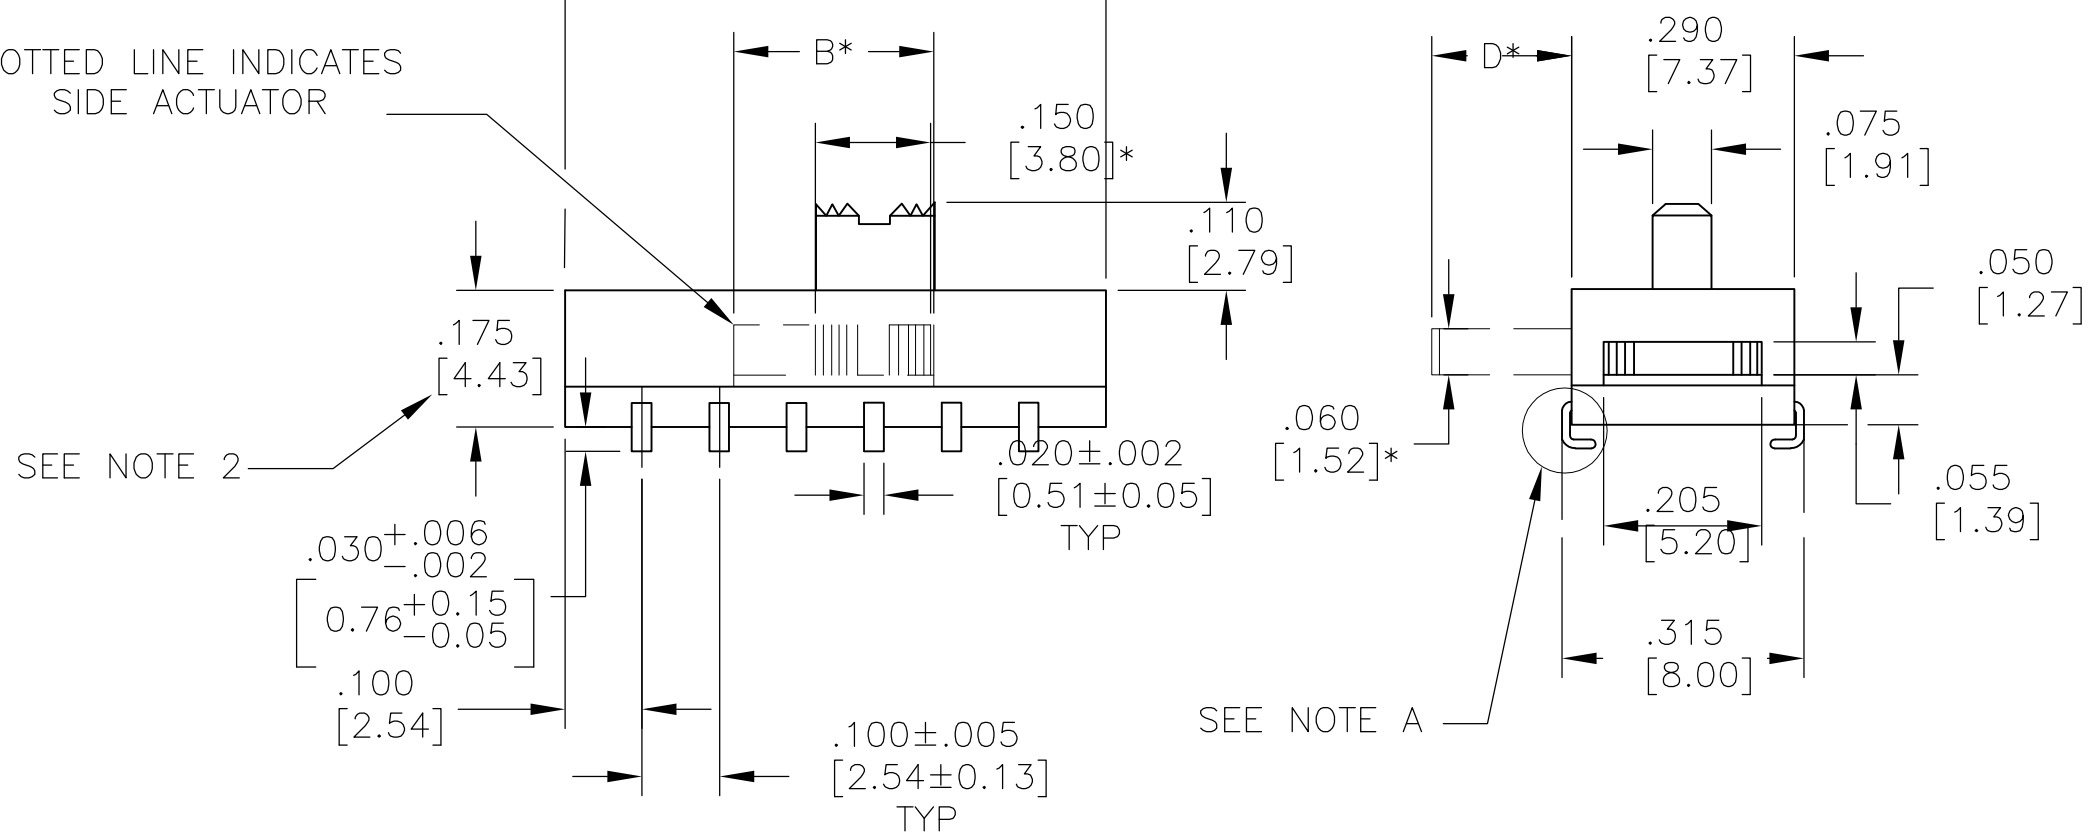

ASE


SEE NOTE A

REVERSE "L" TYPE SURFACE MOUNT

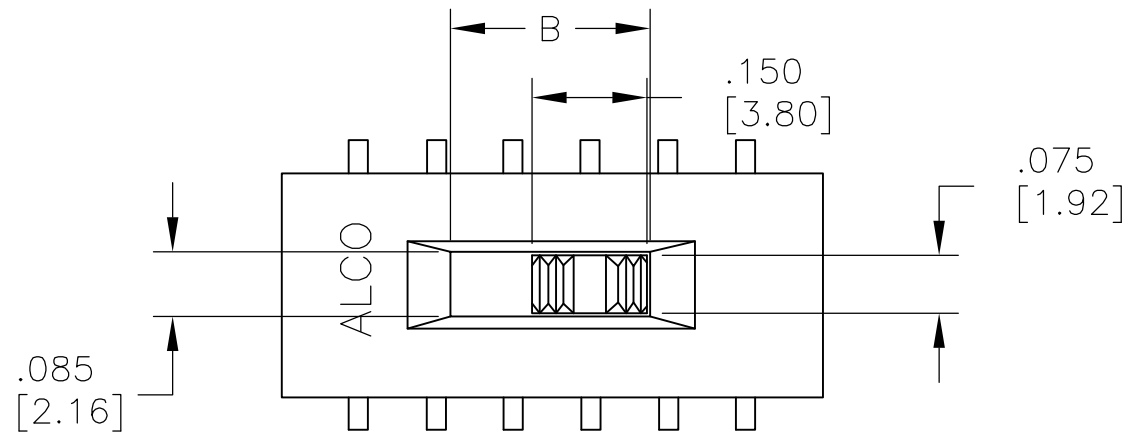


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

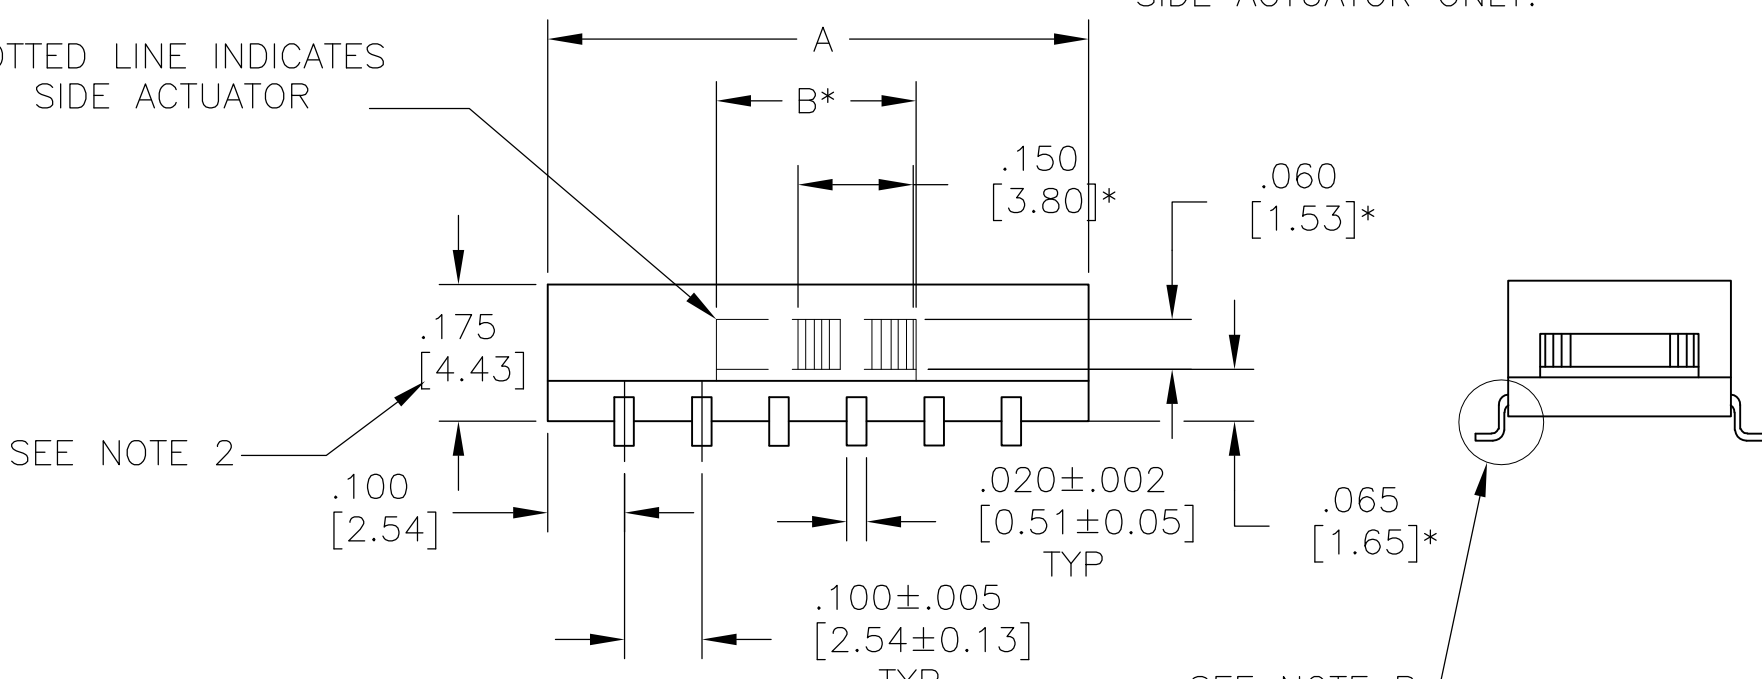


ASF

SEE NOTE B

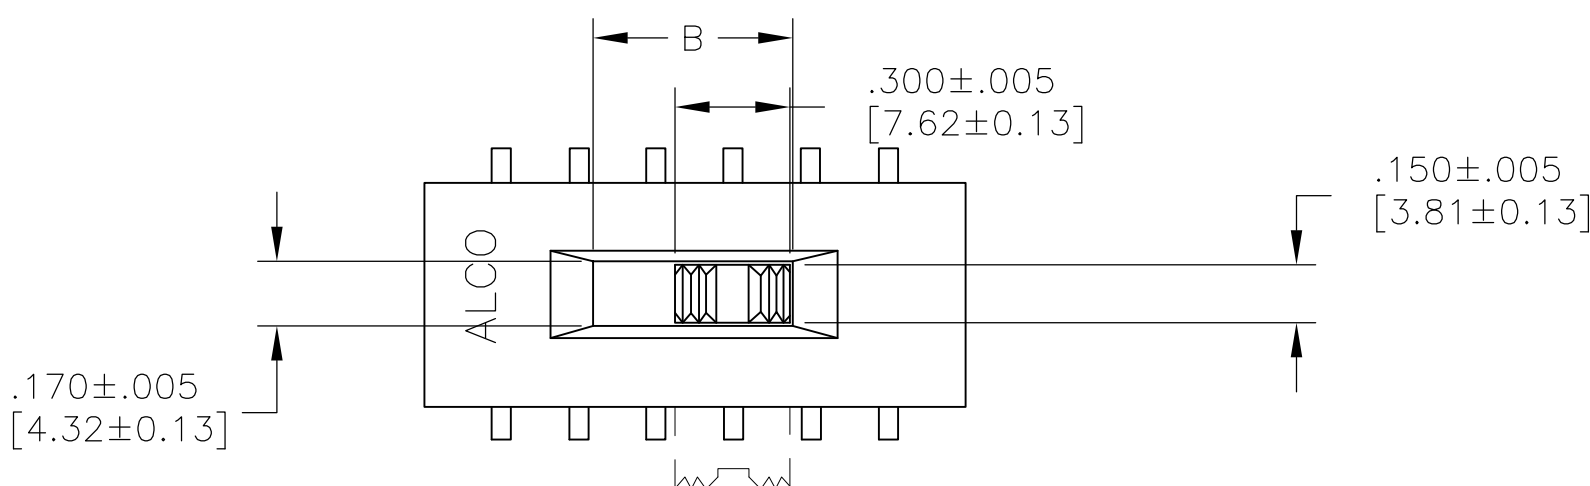

* SIDE ACTUATOR ONLY.


DOTTED LINE INDICATES
SIDE ACTUATOR

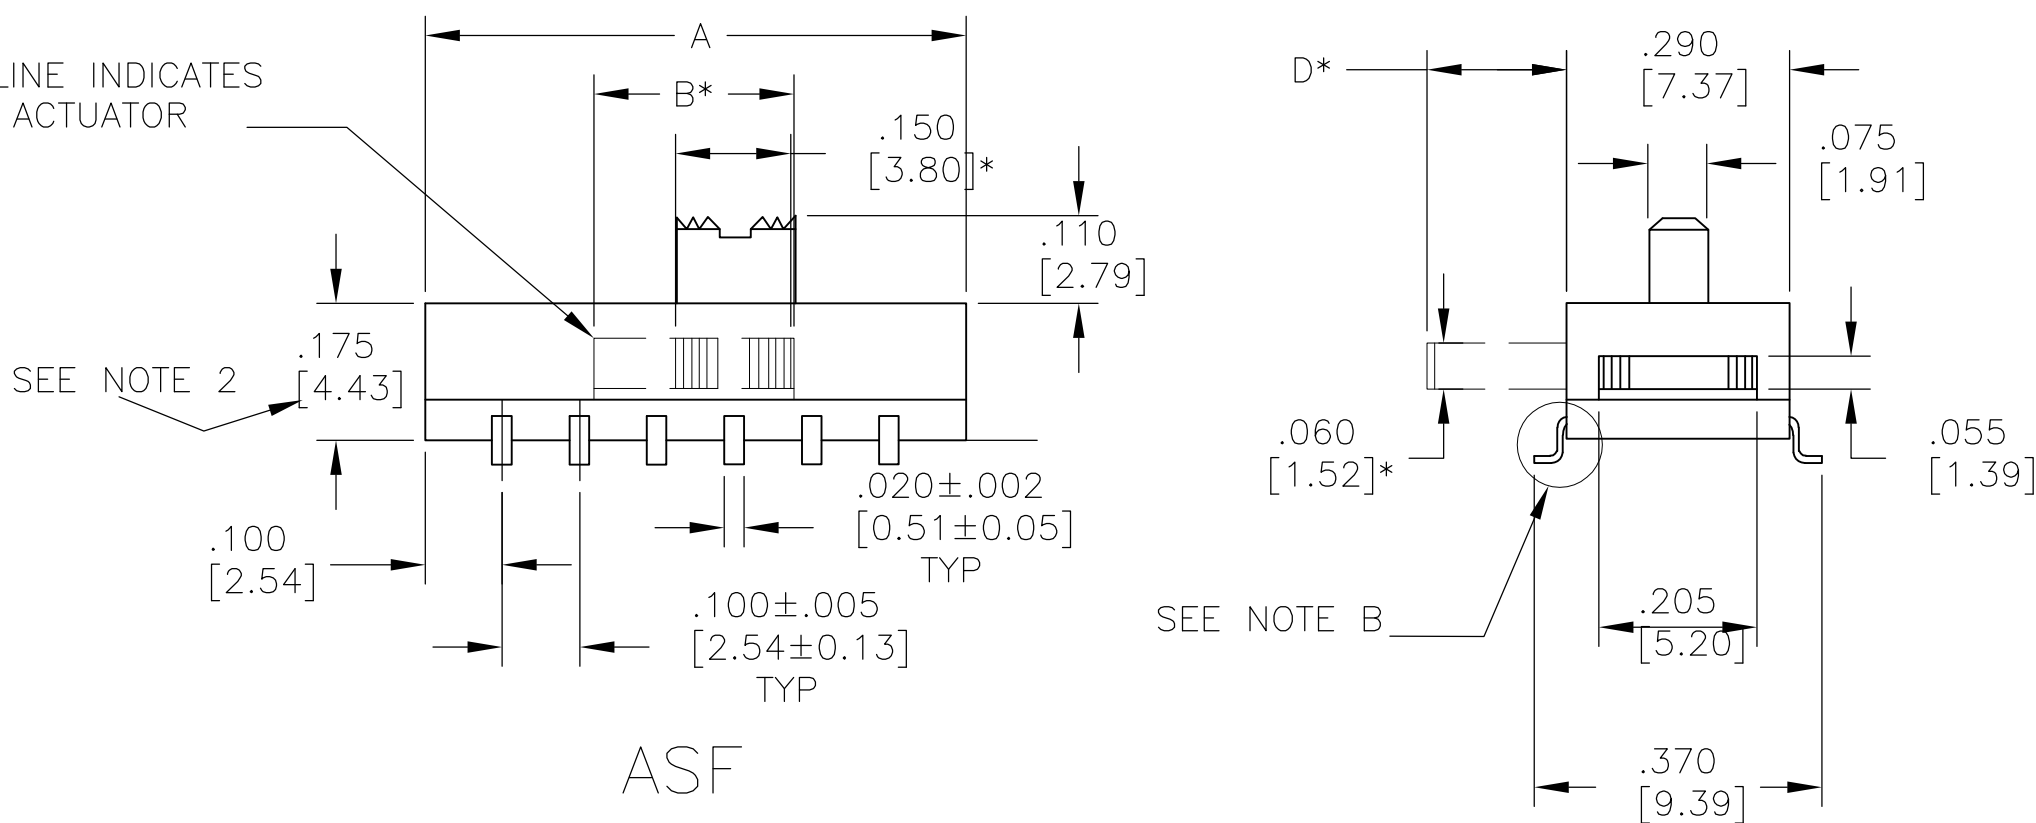


ASF

SEE NOTE B

"L" TYPE SURFACE MOUNT

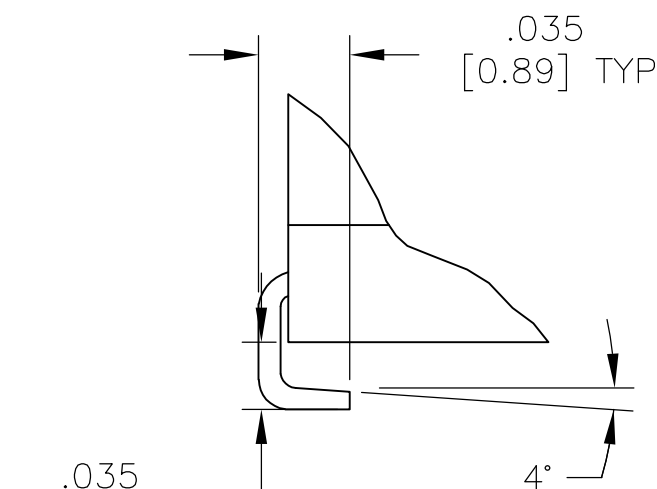

DETAIL A
SCALE 10:1

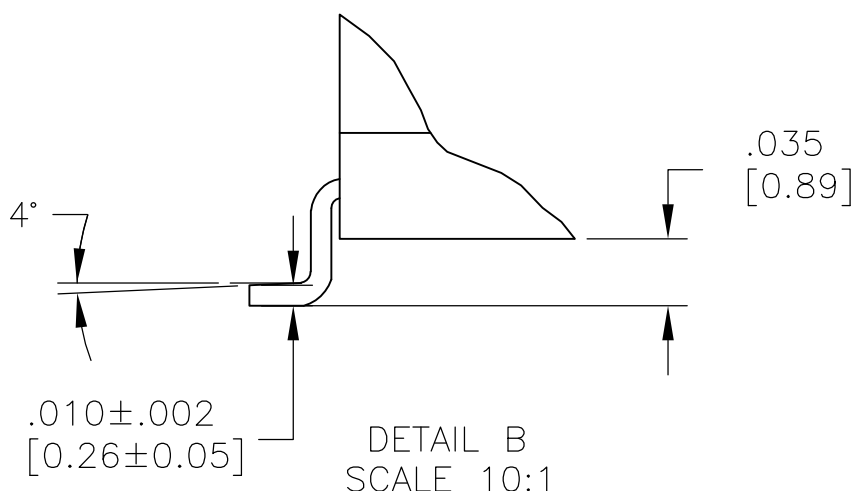

DETAIL B
SCALE 10:1

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	12JAN04	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK —	—		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND SURFACE MOUNT	
	0. PLC ± .010		PRODUCT SPEC		
	1. PLC ± .010		APPLICATION SPEC		
	2. PLC ± .010		—		
MATERIAL SEE SPECIFICATIONS		FINISH —	WEIGHT —	SIZE A1	RESTRICTED TO —
		CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 2