



WIRE CRIMP				TERMINAL CRIMP HEIGHT
CRIMP SYMBOL	DIM	GO	NO GO	
22-18	0	.1625	.0675	

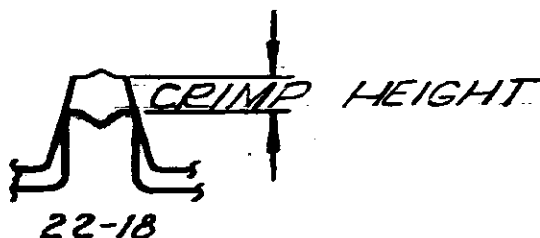


INSULATION CRIMP				TERMINAL CRIMP HEIGHT
CRIMP SYMBOL	DIM	GO	NO GO	
22-18	A	.0290	.0510	

SEE NOTE 6

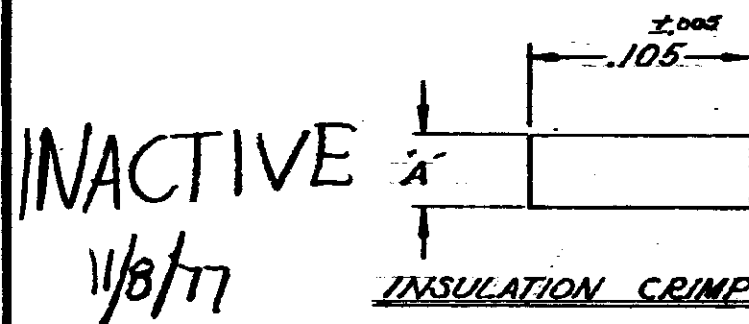

INSULATION CRIMP
CRIMP SYMBOL 22-18





WIRE CRIMP
CRIMP SYMBOL 22-18

ENLARGED END VIEW OF GAGES

SUGGESTED GAGE DESIGN



NO.	REVISION	DATE	BY	CHK	DATE
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					
63					
64					
65					
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					
81					
82					
83					
84					
85					
86					
87					
88					
89					
90					
91					
92					
93					
94					
95					
96					
97					
98					
99					
100					

PINS AND SNAP RINGS
SEE NOTE 2

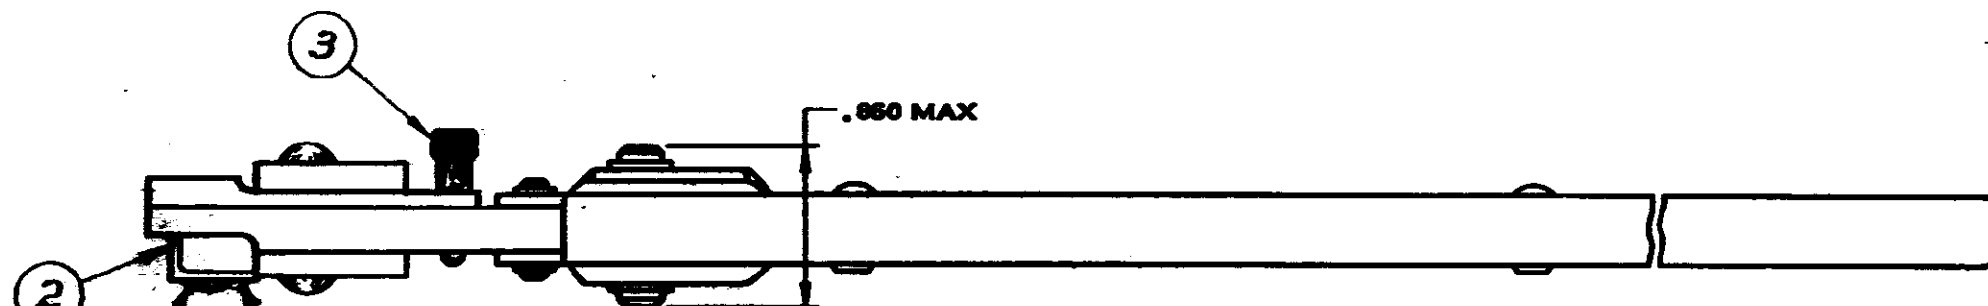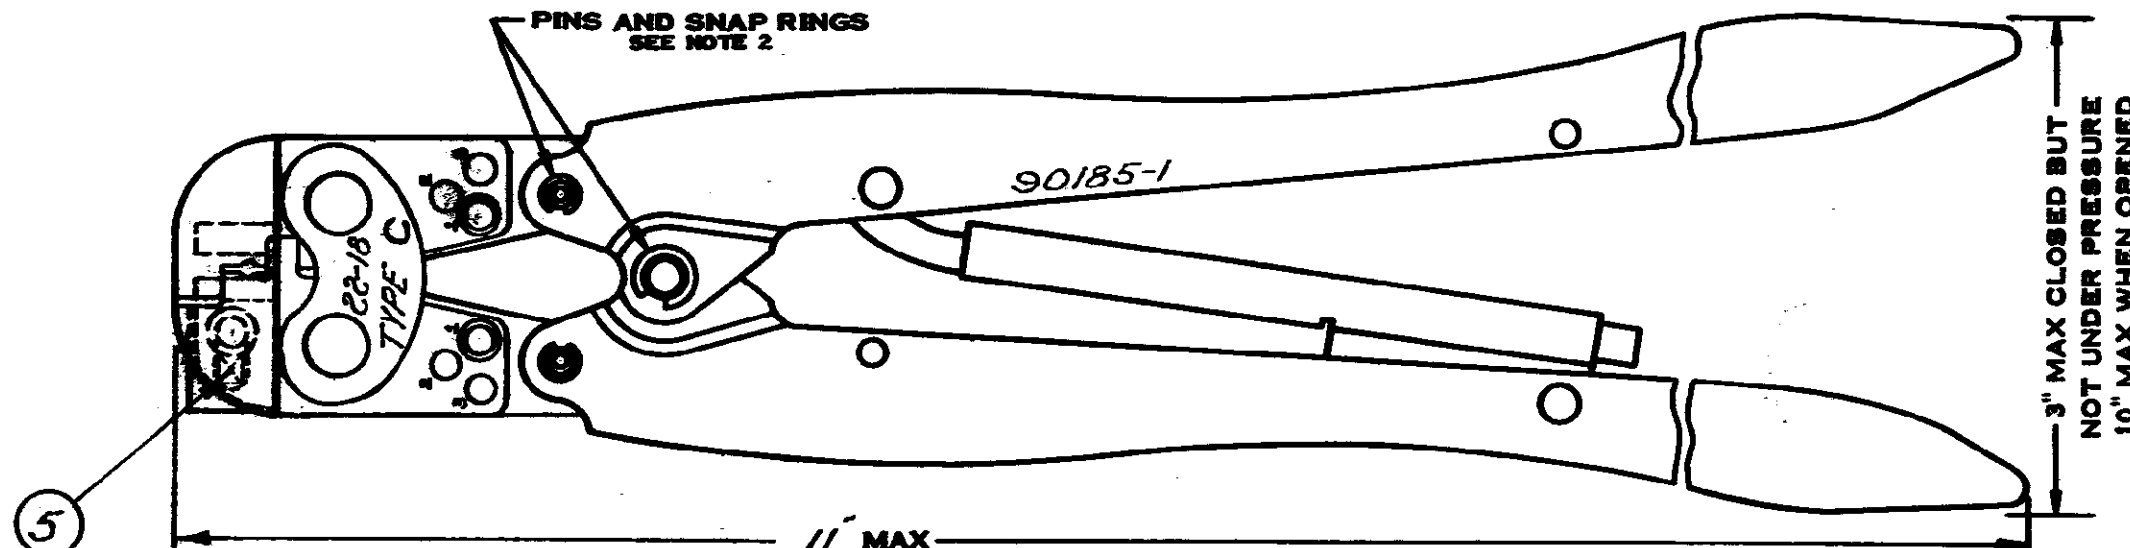

INACTIVE,
REFER TO
IS SHEET "7278"

11/8/77



SUGGESTED
DOUBLE END HANDLE A.G.D. STD.

NO.	NUMBER	NAME	ITEM NO.
1	301201	SPRING	5
1	125645-1	HOUSING-LOCATOR	4
2	39207	ADJUSTMENT PIN	3
1	125644-1	LOCATOR	2
1	2-59577-6	SCREW (#8-32 x 7/16 LG.)	1

CUSTOMER COPY REFERENCE ONLY	
MATERIAL-STEEL	
FINISH-BLACK OXIDE	
WEIGHT-/ LBS. 3 OZ.	
WIRE - RANGE - INSULATION	
TOLERANCE EXCEPT AS NOTED	
SCALE	
LBC R B	
NO 90185	
REV D1	
DOUBLE ACTION HAND TOOL	

CUSTOMER DRAWING

DIMENSIONS IN INCHES DO NOT SCALE PRINT