



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	3	RE-F-09671	K.N	H.Y	09.09.08	1				
2					.	1				.
3					.	1				.

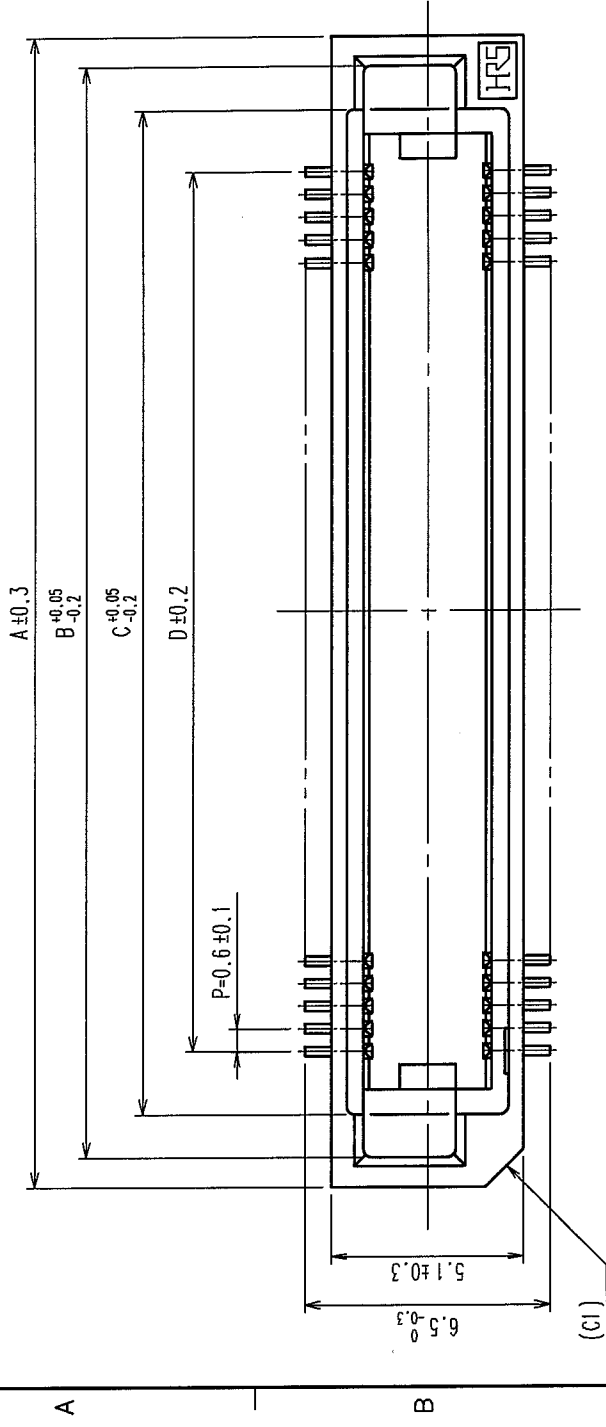


RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

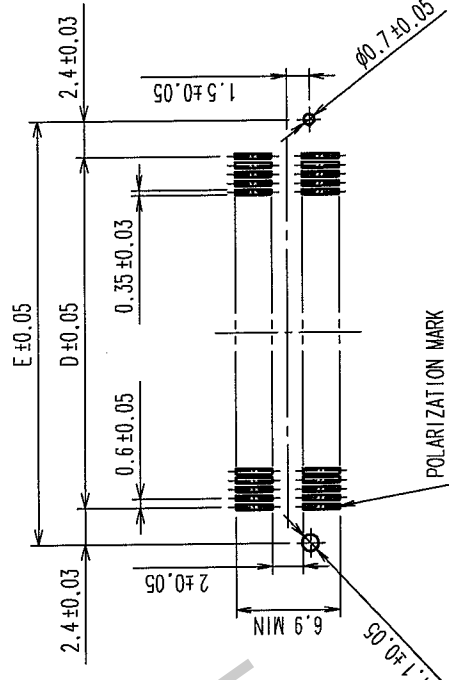

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.	6	7	A	B	C	D	E
FX8C-60P-SV1(93)	CL578-0521-6-93	60	×	24.60	23.00	20.70	17.40	22.20
FX8C-80P-SV1(93)	CL578-0523-1-93	80	×	30.60	29.00	26.70	23.40	28.20
FX8C-100P-SV1(93)	CL578-0525-7-93	100	—	36.60	35.00	32.70	29.40	34.20
FX8C-120P-SV1(93)	CL578-0526-0-93	120	—	42.60	41.00	38.70	35.40	40.20
FX8C-140P-SV1(93)	CL578-0527-2-93	140	—	48.60	47.00	44.70	41.40	46.20

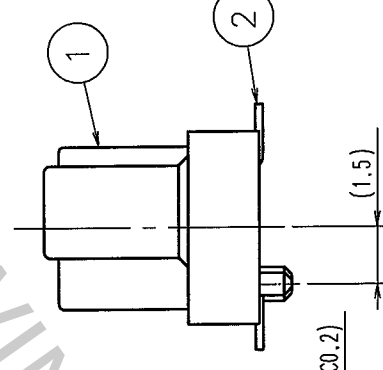

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
3. THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
4. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED A
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
6. NUMBER OF CONTACTS.

6 NUMBER OF CONTACTS.

×:PRODUCED, -:NO PRODUCED

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1 μm min
					LEAD AREA: TIN-PLATING 1 μm min
					UNDER PLATING: NICKEL 1 μm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S. SUZUKI	K. NAKAMURA	H. OKAWA	Y. YOSHIMURA	
	03.02.03	03.02.12	03.02.14	03.02.15	.
					.

		DRAWING NO. EDC3-151087-23	PART NO. FX8C-**-P-SV1(93)	1/2
SCALE				
FREE		HRS	CODE NO. CL578	1/2
UNITS mm				

TO	PCK			
----	-----	--	--	--

