



VARIABLE AC REGULATOR UP TO 17A WITH RFI SUPPRESSION

QVR/RFI 17A
QVR-s/RFI 17A

X10299

INTRODUCTION

These variable phase angle power regulators are robust and compact units for 230V, up to 17A, which are ideal for controlling single phase mains driven loads. They give fully adjustable voltage output from 0-98% and the large triac enables the unit to handle high inrush currents with ample safety margin on industrial installations. These units incorporate their own RFI filter network to comply with EMC Regulations (Class A).


APPLICATIONS

Suitable for quartz lamps, or any conventional resistive heating elements in series or parallel configurations. Applications including ovens, moulders, dryers and some inductive loads, for example transformers and motors.

FEATURES


- Integral RFI network.
- ON/OFF switched version (QVRS)
- Infinitely variable 0-98% output.
- Single hole fixing.
- Rugged and compact
- Designed to maximise thermal dissipation

RoHS Compliant
Directive
2002/95/EC

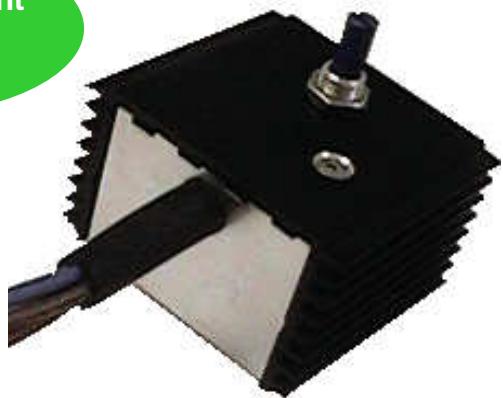


INSTALLATION

CONNECTIONS AND DIMENSIONS

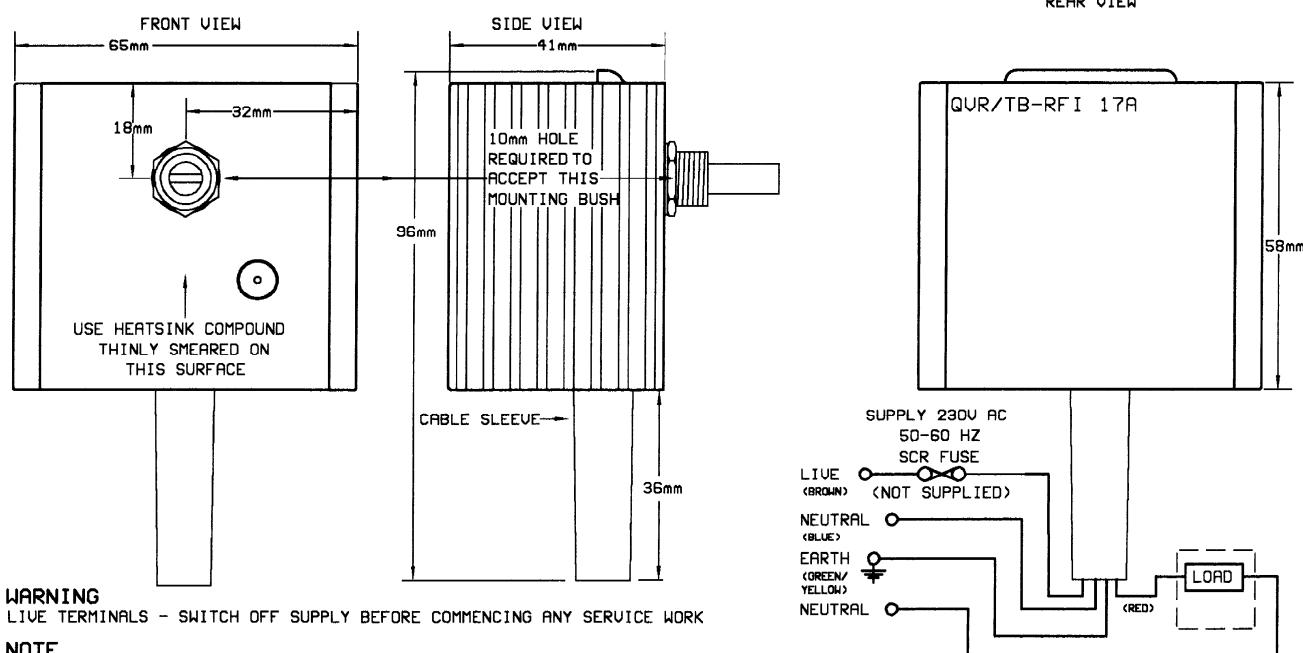

INSTALLATION

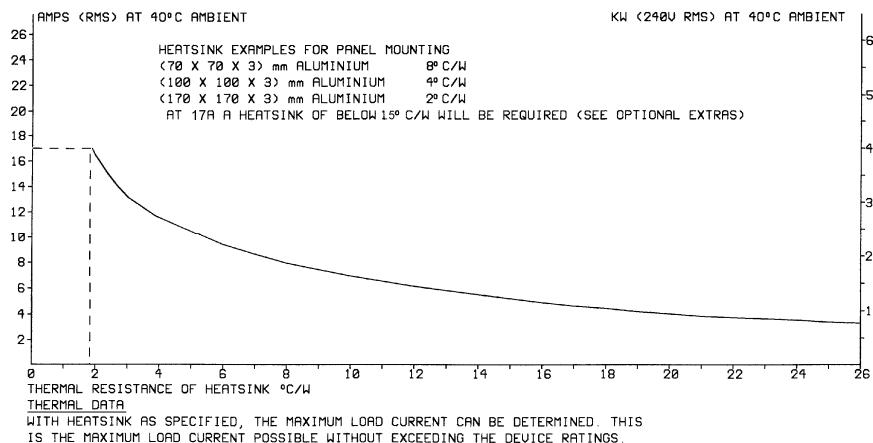

SPECIFICATIONS

SPECIFICATIONS
Triac limiting RMS. On state cycle
Peak one cycle surge @ (10mS)
Max forward volts drop at 10A
Max load at 20°C ambient (without extra heatsink)
Mains frequency

25A	Isolation voltage
320A	I^2t limiting value for fusing
1.5V	Mains supply tolerance, within 10%
10A	Max recommended unit temperature
50/60Hz	Max recommended unit temperature

FURTHER DIMENSIONS

Shaft diameter 6.3mm Shaft projection from bush 13mm/SW 8mm
 Bush length 5mm Fixing hole diameter 10mm

Initial SW Data sheet

CE MARKING

CE MARKING

This product family carries a 'CE' mark and incorporates a filter (Standard type to emission levels BS EN 55022 Class A - Industrial) to address the EMC directive. For information see recommendation section and contact our sales desk. (See Declaration of Conformity).

RECOMMENDATIONS

Other documents available on request, which may be appropriate for your application: -

CODE	IDENTITY	DESCRIPTION
X10229	RFI	Single Phase Filtering recommendations - addressing EMC Directive
X10213	ITA	Interaction, uses for phase angle and for burst fire control.
X10255	SRA	Safety requirements - addressing the Low Voltage Directive (LVD) including: - Thermal data/cooling; "Live" parts warning & Earth requirements; Fusing recommendations.
	AP02/4	COS UAL Conditions of sale.

NOTE It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.E. wiring regulations (BS7671) by suitably qualified/trained personnel.

The regulations contain important requirements regarding safety of electrical equipment (For International Standards refer to IEC C/ directive IEC 950).

ORDER CODE:

State part number: Non switched QVR/RFI 17A +(Supply voltage)
State part number: Switched QVRS/RFI 17A +(Supply voltage)
Optional extras include: Knob, Dial, Heatsink paste



UNITED AUTOMATION LIMITED

1 Southport Business Park
Kew
Southport, PR8 4HQ
ENGLAND

Page No. 2 of 2 Issue 2

Tel: 0044 (0) 1704 - 516500 Main
Tel: 0044 (0) 1704 - 516516 Sales
Fax: 0044 (0) 1704 - 516501
Enquiry@united-automation.com
www.united-automation.com
Date 22/12/99

