




DKSB1001B

dsPIC33 Breakout Board

02 July 2009

Features

- Microchip DSPIC33FJ256GP710-I/PF-ND
- Small footprint: 3.1" x 2.5"
- Half-size DIP oscillator socket
- All I/O pins available
- Extra power pins available
- Large input voltage range: 5V-15V
- Indicator LED for programming checks
- RJ-11 jack for ICD2 programming and debugging
- MCLR on external switch or pin

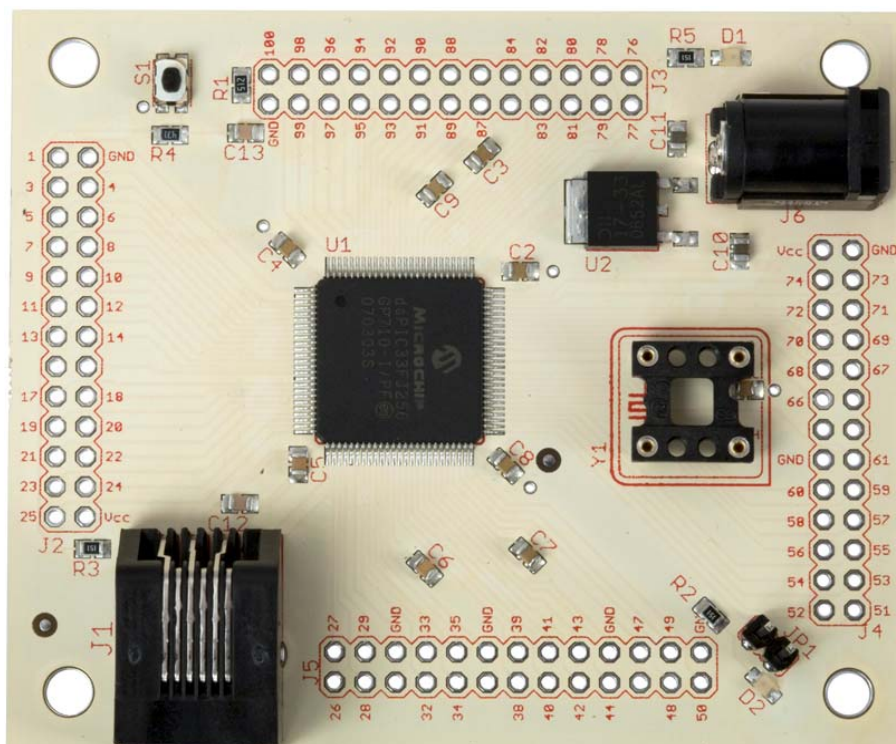

Quick Start

The board can be programmed with the “blink” program. This program implements a delay routine that toggles Port F, pin 3. The frequency of the loop is approximately 1Hz for the LED signal. The program is designed to test the programmability of the chip and minimally test its operation. This program can be re-installed at any time and is available on Digi-Key’s website. The “blink” program is also included in Appendix A.

Functional Description

The DKS1001B is a break out board for Microchip’s dsPIC33 in a 100 pin TQFP. This board offers developers access to a high pin count, small package part, while maintaining maximum flexibility. Each microcontroller pin has its own external output pin on the board. Every I/O is accessible via the unpopulated 0.1” headers.

Power

The 5V regulator has large input range of 5-15VDC. It can supply a maximum of 1.0A.

LEDs

The board has two LEDs. D1 is a power indicator. D2 is a general purpose LED available to the developer. Removing JP1 disconnects D2 from the microcontroller’s I/O pin.

Reset

The on-board master reset S1 allows for easy restart of applications. A reset pin is also available on header J2.


Oscillator


Since it has an internal oscillator, the microcontroller can operate without an external oscillator. However, an external half-size DIP oscillator socket is provided for applications that require precision clocking. Oscillator frequencies up to 50 MHz are available from Digi-Key.

Programming and Debugging


The board employs an RJ-11 socket for programming and debugging with Microchip’s standard development tools.

Schematics

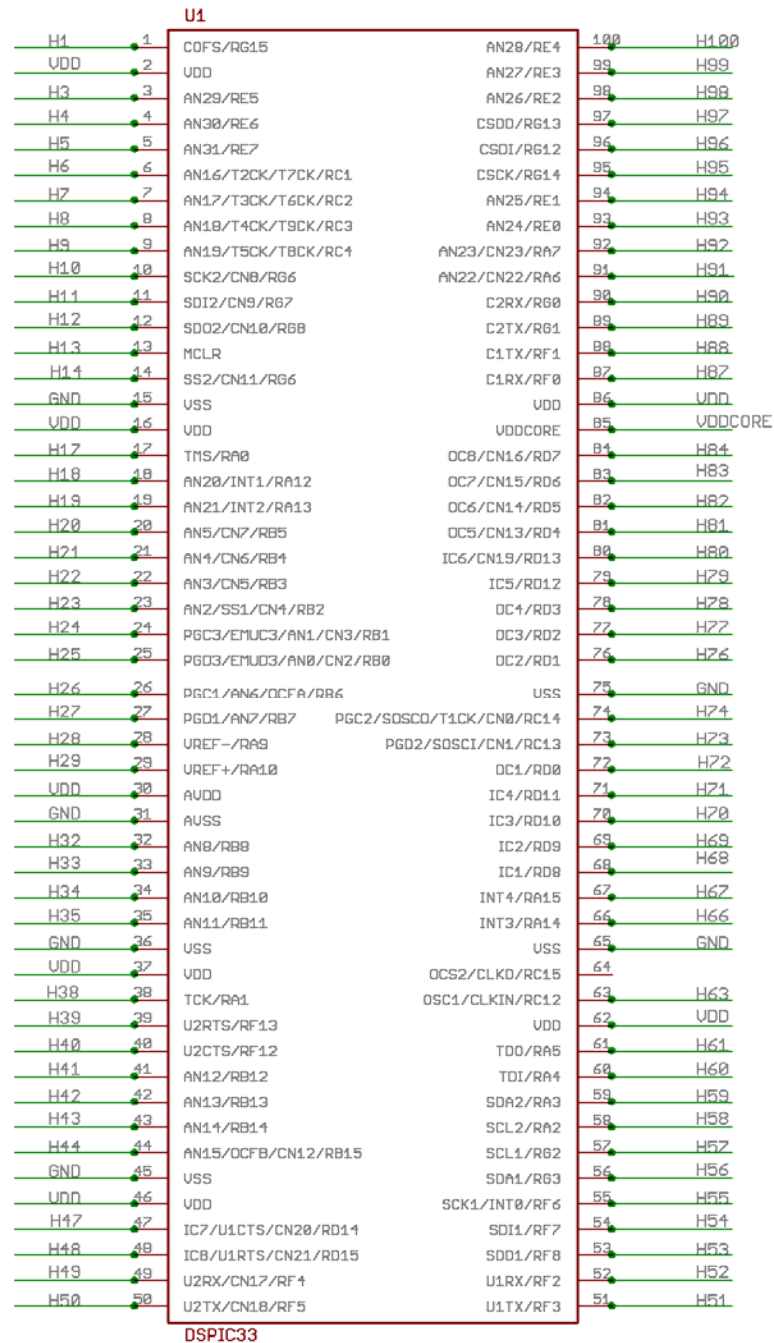

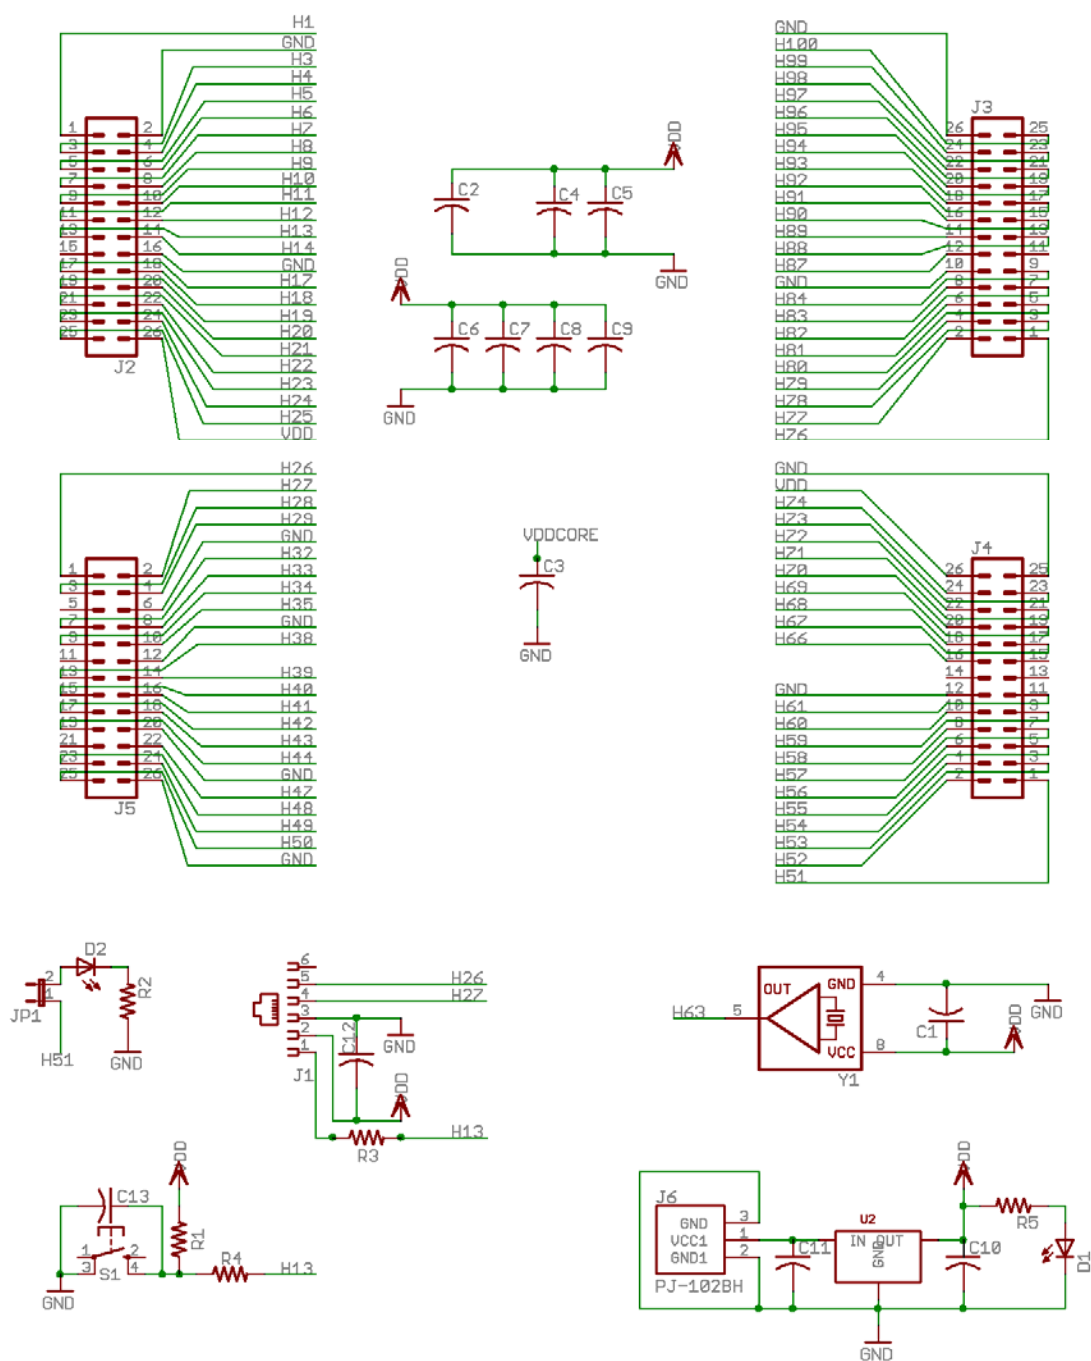

Layout

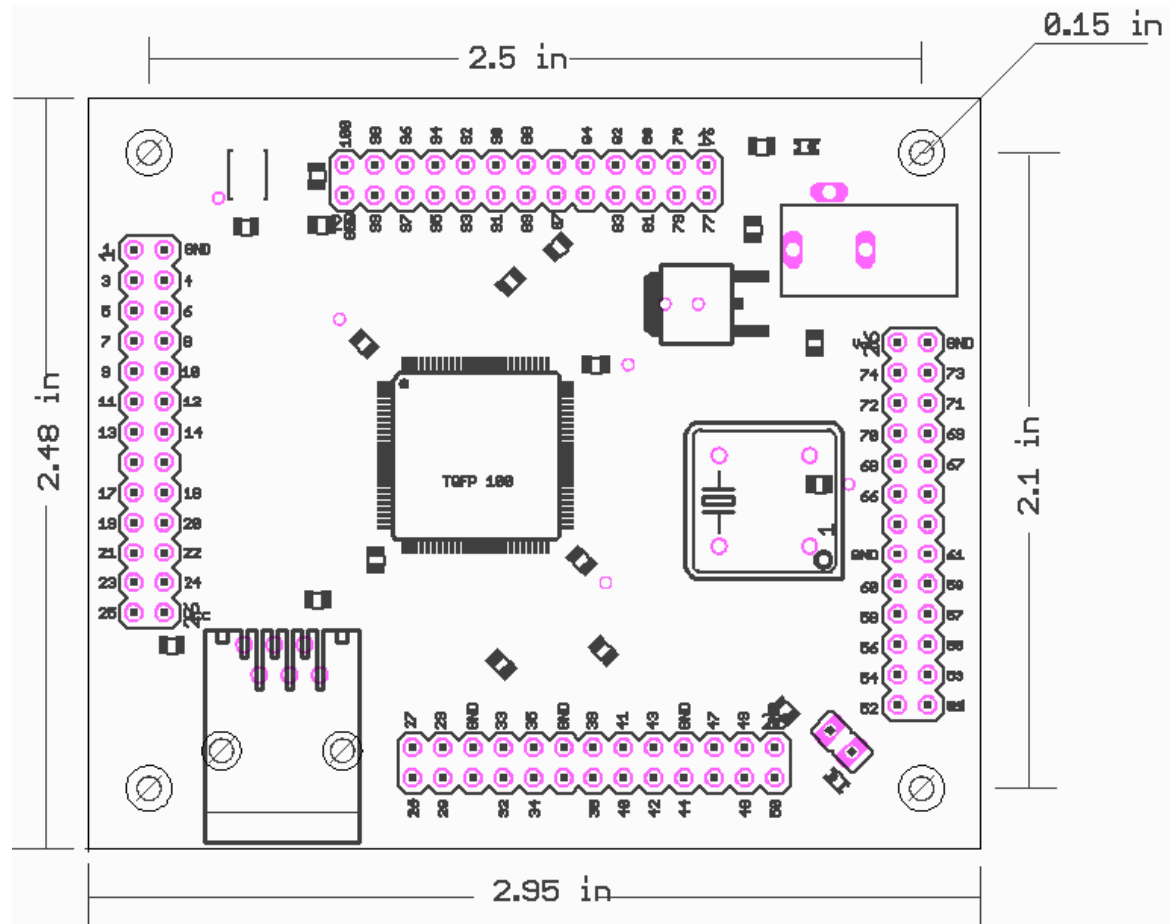

Bill of Materials

Ref Des	Part No.	Description	Manufacturers #
U1	DSPIC33FJ256GP710-I/PF-ND	Microchip dsPIC or PIC24 in 100pin 14X14mm	DSPIC33FJ256GP710-I/PF
J6	CP-102BH-ND	CONN PWR JACK 2.5X5.5MM HIGH CUR	PJ-102BH
U2	AP1117D33LDICT-ND	IC REG LDO 1.0A 3.3V TO-252	AP1117D33L-13
Y1	A463-ND	OSCILLATOR SOCKET HALF SIZE 4PIN	1108800
S1	401-1426-1-ND	SWITCH TACT SPST-NO 120GF GW	KMR211GLFS
D1,D2	L71514CT-ND	LED 637NM RED DIFF SMD 0805	CMDA5AR7D1S
J1	A31422-ND	CONN MOD JACK 6-6 RT/A PCB 50AU	5555165-1
JP1	WM8072-ND	CONN HEADER 2POS .100" STR TIN	90120-0122
C1,C2,C3,C4,C5 C6,C7,C8,C9	399-1284-1-ND	CAP 1.0UF 16V CERAMIC X7R 0805	C0805C105K4RACTU
C10,C11	587-1295-1-ND	CAP CER 10UF 16V X5R 0805	EMK212BJ106KG-T
C12,C13	PCC1812CT-ND	CAP .1UF 16V CERAMIC X7R 0805	ECJ-2VB1C104K
R1	311-5.1KARCT-ND	RES 5.1K OHM 1/8W 5% 0805 SMD	RC0805JR-075K1L
R2,R3,R5	P150ACT-ND	RES 150 OHM 1/8W 5% 0805 SMD	ERJ-6GEYJ151V
R4	311-470ARCT-ND	RES 470 OHM 1/8W 5% 0805 SMD	RC0805JR-07470RL
JS1	S9001-ND	CONN JUMPER SHORTING GOLD FLASH	SPC02SYAN

Appendix A: Sample Blinking Code

```
/******  
* File Name:      DKSB1001B.c  
* Dependencies:   p33FJ256GP710.h  
* Processor:      dsPIC33  
* Compiler:       MPLAB® C30 v2.01 or higher  
*  
* SOFTWARE IS PROVIDED "AS IS." DIGI-KEY EXPRESSLY DISCLAIMS ANY  
* WARRANTY OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT  
* LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A  
* PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL DIGI-KEY  
* BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL  
* DAMAGES, LOST PROFITS OR LOST DATA, HARM TO YOUR EQUIPMENT, COST OF  
* PROCUREMENT OF SUBSTITUTE GOODS, TECHNOLOGY OR SERVICES, ANY CLAIMS  
* BY THIRD PARTIES (INCLUDING BUT NOT LIMITED TO ANY DEFENSE THEREOF),  
* ANY CLAIMS FOR INDEMNITY OR CONTRIBUTION, OR OTHER SIMILAR COSTS.  
*  
* REVISION HISTORY:  
*-----  
* Author      Date      Comments on this revision  
*-----  
*  JP          3/15/07    simple blinker  
*****/  
  
#include "p33FJ256GP710.h"  
#include "delay.h"  
  
_FGS(GWRP_OFF & GCP_OFF);  
_FOSCSEL(FNOSC_FRC);  
_FOSC(FCKSM_CSDCMD & OSCIOFNC_OFF & POSCMD_XT);  
_FWDTC(FWDTEN_OFF);  
  
int main ( void )  
{  
  
    /* set LED pins (RF3) as outputs */  
    TRISF = 0xFFFF7;  
  
    /* Infinite Loop */  
    while ( 1 )  
    {  
        PORTFbits.RF3 = !PORTFbits.RF3;  
        Delay(300);  
    };  
}
```

Disclaimer

This document is for informational use only and is subject to change without prior notice. Digi-Key makes no commitment to update or keep current the information contained herein. Digi-Key does not guarantee or warrant that any information provided is accurate, complete, or correct and disclaims any and all liability associated with the use of the information contained herein. The use of this information and Digi-Key's liability is subject to Digi-Key's standard Terms & Conditions which can be found at www.digi-key.com by clicking on the Terms & Conditions link at the bottom of the web page.

No license, whether express, implied, arising by estoppel or otherwise is granted under any intellectual property or other rights of Digi-Key or others.

DIGI-KEY MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO PRODUCT CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE.

Digi-Key disclaims all liability arising from this information and its use. Use of Digi-Key devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Digi-Key from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Digi-Key intellectual property rights.

Trademarks

DIGI-KEY® is a registered trademark of Digi-Key Corporation. All other trademarks, service marks and product names contained herein are the sole property of their respective owner and their use is for informational purposes only and does not imply any endorsement, recommendation, sponsorship or approval by the trademark owner of the contents.

Copyright

Use of this document is limited to customer's internal business use for the evaluation and purchase of products. No permission is granted to the user to copy, print, store, distribute, transmit, display in public or modify the content of this document in any way for any other purpose.

© Copyright 2009 Digi-Key Corporation. All rights reserved.