
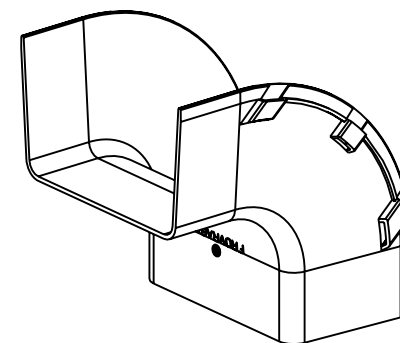


Δ_K

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 6x4 OUTSIDE VERTICAL RIGHT ANGLE FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

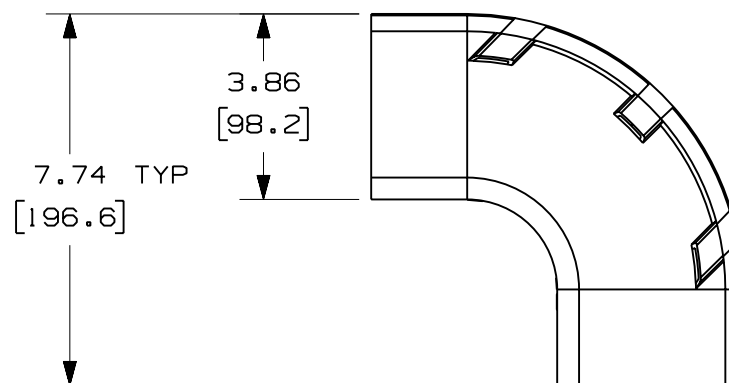

CAD_FILENAME/LAYERS

△ FROVRA6X4.pdf

PANDUIT

CORP TINLEY PARK, ILLINOIS

FIBERRUNNER 6x4 OUTSIDE VERTICAL RIGHT ANGLE FITTING (FROVRA6X4)

CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN IN
INCHES, THIRD ANGLE PROJECTION.

MAT'L:	
--------	--

MAT'L:	
--------	--

MAT'L:	
--------	--

HIW

ABS

NONE

37185-61

DWG
A
SIZE

-	-----	---	---	K. REVISED PART WEIGHT J. REVISED GENERAL NOTES	-----	--	--			
3	7-10-06	DTP	RN	I. REVISED CAD FILENAME H. REVISED AND REDRAWN	37185-61	RN	RN			
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP	GBM