


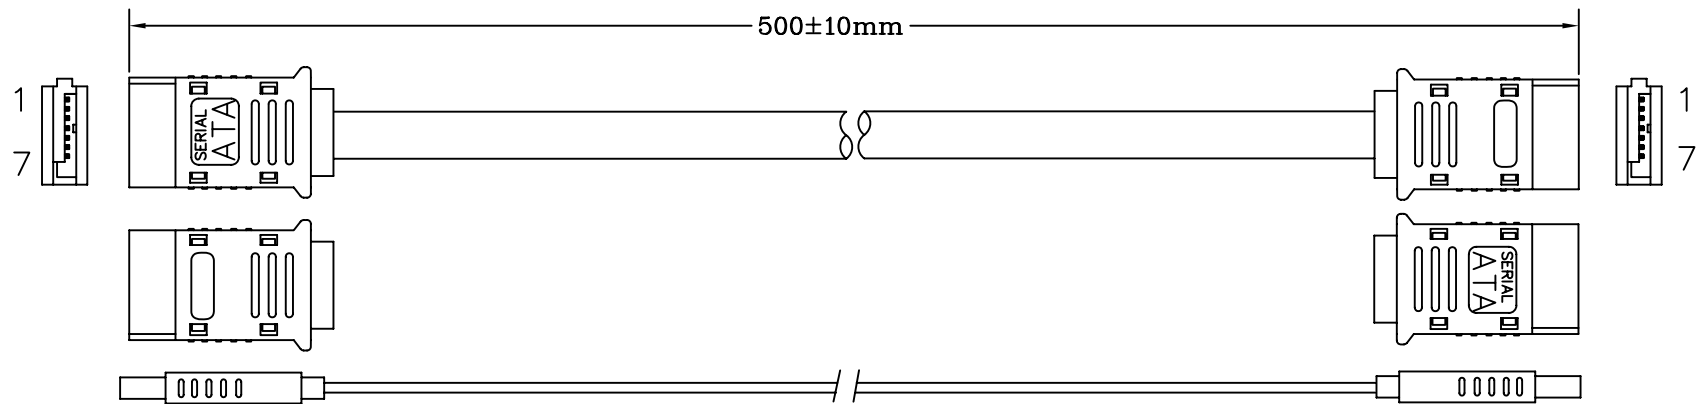

SERIAL ATA 7P(ASS' BLACK TYPE)


SERIAL ATA 7P(ASS' BLACK TYPE)

NOTE:

NOTE: TWO CONNECTORS MUST BE WITH RED COVER!!

1. CABLE: 26AWG,UL2725,AL-FOIL,(26AWG*1P+2D+AL)*2C+AL,OD=2.3*8.3mm,RED COLOR,PVC JACKET.
2. LENGTH: 500mm.
3. CONNECTORS: SERIAL ATA 7P*2PCS.(BLACK COLOR)
4. MOLD: ASS'Y TYPE.
5. CONTACTS:

SERIAL ATA 7P	1+4+7	2	3	5	6
SERIAL ATA 7P	1+4+7	2	3	5	6
6. OPEN/SHORT TEST: 100% TEST.
INSULATION: MIN. 2M.




1PCS/PE BAG(200*100*0.06MM)+PAPER CARD
+LABEL,100PCS/CTN

COMPANY	RLA		ITEM NO.	11.03.1555	NO B	Rotronic Co., Ltd			SCALE	NON
REVISION	DATE	DISCRIPTION	DRAWN BY						UNIT(mm)	
REV.A/0			DESIGNED BY						DRAWING NO.	
			APPROVAL BY							


ROHS-CPMPLIANT

LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR # 081203-5 EDIT PACKING, ADD BARCODE LABEL	12/03/08'

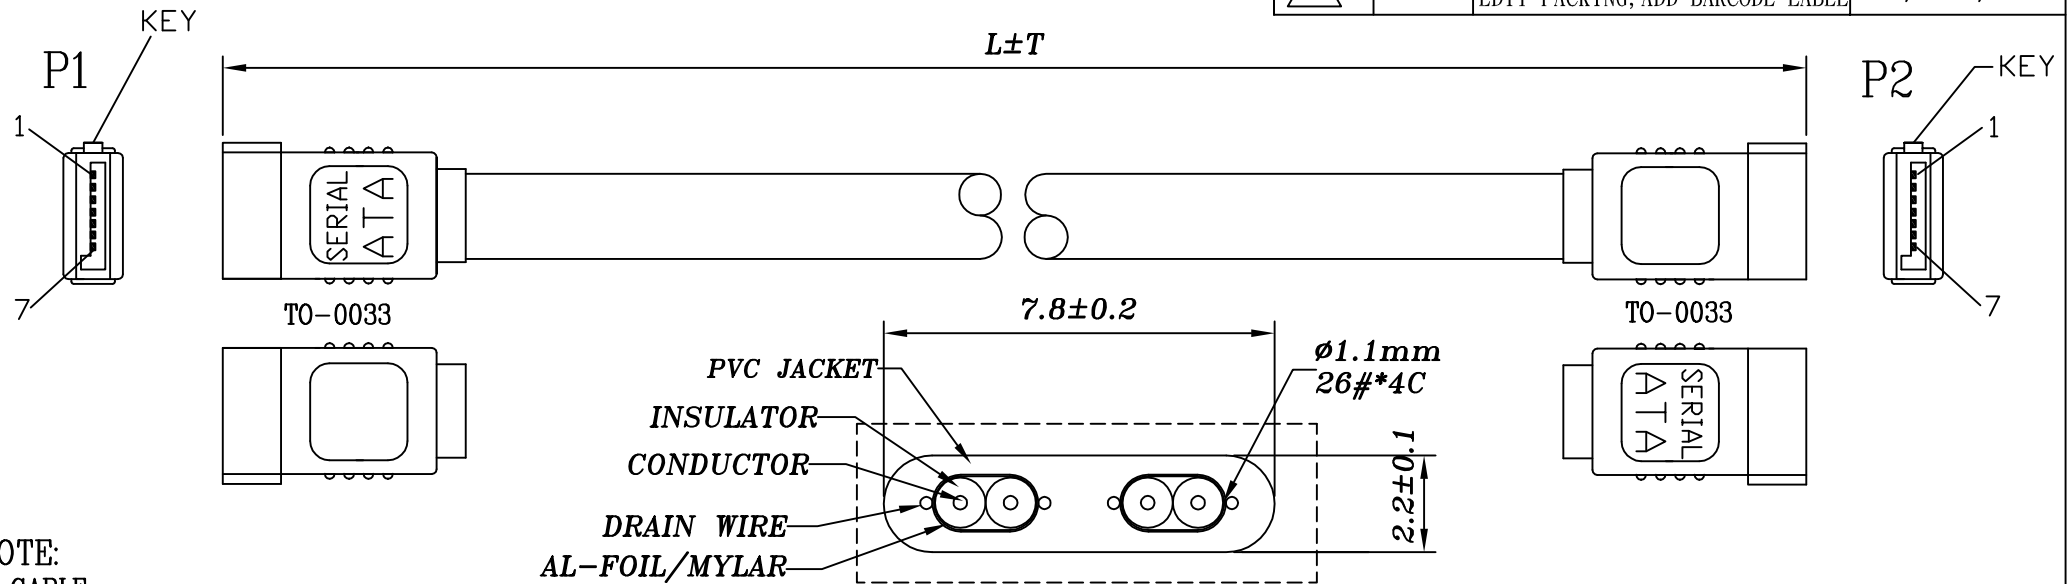

NOTE:

- CABLE:
UL2725 80°C 30V [26AWG(1/0.404)*2F
+AL/MY+DRAIN WIRE(1/0.32)*2]TIN
INS: FOAM-PE OD: $\phi 1.1 \pm 0.05$ mm
PVC JACKET OD: $\phi (2.2 \pm 0.1) * (7.8 \pm 0.2)$ mm COLOR: RED (PANTONE 200C)
IMPEDANCE: 100 ± 5 OHM
- CONNECTOR:
2-1 MATERIAL:
HOUSING: HIGH TEMPERATURE POLYESTER & GLASS FIBER UL 94V-0
TERMINAL: COPPER ALLOY, CRIMP TYPE
2-1 PLATING:
CONTACT AREA: G/F
- HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
- CABLE ASS'Y ELECTRICAL TEST:
4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 3 OHM MAX
4-3 INSULATION RESISTANCE 10M OHM MIN
4-4 HI-POT DC300V/0.01SEC.
- PACKING: EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL
100 PCS / INNER CARTON, 2 INNER CARTON / MASTER CARTON

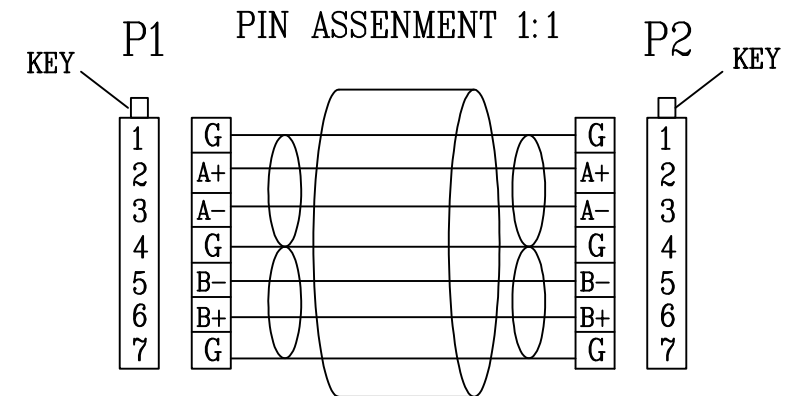

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw
FANNIE 12/03/08'

Check

Engr

Rotronic Co., Ltd.

Title
SERIAL ATA SIGNAL CABLE

Customer P/N

App'd Customer T-RAG

Scale NONE Units m/m Third Angle Projection

Dwg No. 140-1483 REV:B Sheet 1/1

140-1483-2	11.03.1560	1000	20	360*310*150	380*330*340	7611990148790
140-1483-1	11.03.1555	500	20	360*310*100	380*330*240	
DWG	P/N	L (mm)	T (mm)	INNER CTN(mm)	MASTER CTN(mm)	BAR CODE NO.