

MN101C66A , MN101C66C

Type	MN101C66A (under planning)	MN101C66C (under planning)
ROM (x8-bit)	32 K	48 K
RAM (x8-bit)	1.5 K	2 K
Package	QFP084-P-1818E ^{*Pb free} , LQFP080-P-1414A ^{*Pb free} , TQFP080-P-1212D ^{*Pb free}	
Minimum Instruction Execution Time	0.1 μs (at 4.5 V to 5.5 V, 20 MHz) 0.25 μs (at 2.7 V to 5.5 V, 8 MHz)* 62.5 μs (at 2.0 V to 5.5 V, 32 kHz)* *The lower limit for operation guarantee for flash memory built-in type is 4.5 V. *The lower limit for operation guarantee for EPROM built-in type is 2.3 V.	
Interrupts	• RESET • Watchdog • External 0 • External 1 • External 2 • External 3* ¹ • External 4 (key interrupt dedicated) • Timer 0 • Timer 1 • Timer 2 • Timer 3 • Timer 6 • Time base • Timer 7 (2 systems) • Timer 8 (2 systems) • Serial 0 (2 systems) • Serial 2 • A/D conversion finish * ¹ LQFP080-P-1414A, TQFP080-P-1212D: Not mounted	
Timer Counter	Timer counter 0 : 8-bit × 1 (square-wave/8-bit PWM output, event count, generation of remote control carrier, simple pulse width measurement) (square-wave/PWM output to large current terminal P50 possible) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 0 Timer counter 1 : 8-bit × 1 (square-wave output, event count, synchronous output event) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/8192, 1/32768 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 1 Timer counter 0, 1 can be cascade-connected. Timer counter 2 : 8-bit × 1 (square-wave output, additional pulse type 10-bit PWM output, event count, synchronous output event, simple pulse width measurement) (square-wave/PWM output to large current terminal P52 possible) Clock source 1/2, 1/4 of system clock frequency; 1/1, 1/4, 1/16, 1/32, 1/64 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 2 Timer counter 3 : 8-bit × 1 (square-wave output, event count, generation of remote control carrier, serial 0 baud rate timer) Clock source 1/2, 1/8 of system clock frequency; 1/1, 1/4, 1/16, 1/64, 1/128 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency; external clock input Interrupt source coincidence with compare register 3 Timer counter 2, 3 can be cascade-connected. Timer counter 6 : 8-bit freerun timer Clock source 1/1 of system clock frequency; 1/1, 1/4096, 1/8192 of OSC oscillation clock frequency; 1/1, 1/4096, 1/8192 of XI oscillation clock frequency Interrupt source coincidence with compare register 6 Timer counter 7 : 16-bit × 1 (square-wave output, IGBT/16-bit PWM output (cycle / duty continuous variable), event count, synchronous output event, pulse width measurement, input capture) (square-wave/PWM output to large current terminal P51 possible) Clock source 1/1, 1/2, 1/4, 1/16 of system clock frequency; 1/1, 1/2, 1/4, 1/16 of OSC oscillation clock frequency; 1/1, 1/2, 1/4, 1/16 of external clock input frequency Interrupt source coincidence with compare register 7 (2 lines)	

Timer Counter (Continue)

Timer counter 8: 16 bit × 1
 (square-wave/16-bit PWM output [duty continuous variable], event count, pulse width measurement, inputcapture)
 (square-wave/PWM output to large current terminal P53 possible)
 Clock source 1/1, 1/2, 1/4, 1/16, 1/128 of system clock frequency;
 1/1, 1/2, 1/4, 1/16, 1/128 of OSC oscillation clock frequency;
 1/1, 1/2, 1/4, 1/16 of external clock input frequency
 Interrupt source coincidence with compare register 8 (2 lines)

Timer counters 7, 8 can be cascade-connected.
 (square-wave output, PWM, input capture, pulse width measurement is possible as a 32-bit timer.)

Time base timer (one-minute count setting)
 Clock source 1/1 of OSC oscillation clock frequency; 1/1 of XI oscillation clock frequency
 Interrupt source 1/128, 1/256, 1/512, 1/1024, 1/8192, 1/32768 of clock source frequency

Watchdog timer
 Interrupt source 1/65536, 1/262144, 1/1048576 of system clock frequency

Serial Interface

Serial 0 : synchronous type/UART (full-duplex) × 1
 Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 3;
 1/2, 1/4, 1/16, 1/64 of OSC oscillation clock frequency

Serial 2 : synchronous type × 1
 Clock source 1/2, 1/4 of system clock frequency; pulse output of timer counter 3;
 1/2, 1/4, 1/16, 1/32 of OSC oscillation clock frequency

I/O Pins

I/O		
	61 (60)	• Common use • Specified pull-up resistor available • Input/output selectable (bit unit) (): LQFP080-P-1414A,TQFP080-P-1212D
Input	4 (3)	• Common use • Specified pull-up resistor available (): LQFP080-P-1414A,TQFP080-P-1212D

A/D Inputs

10-bit × 8-ch. (with S/H)

LCD

32 segments × 4 commons (static, 1/2, 1/3, or 1/4 duty)
 LCD power supply separated from VDD (usable if VLCD ≤ VDD)
 LCD power shunt resistance contained

Special Ports

Buzzer output, remote control carrier signal output, high-current drive port


Electrical Characteristics

Supply current

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	fosc = 8 MHz, VDD = 5 V		10	25	mA
	IDD2	fx = 32 kHz, VDD = 3 V		30	100	μA
Supply current at HALT	IDD3	fx = 32 kHz, VDD = 3 V, Ta = 25°C		4	8	μA
	IDD4	fx = 32 kHz, VDD = 3 V, Ta = -40°C to +85°C			30	μA
Supply current at STOP	IDD5	VDD = 5 V, Ta = 25°C			2	μA
	IDD6	VDD = 5 V, Ta = -40°C to +85°C			50	μA


See the next page for pin assignment and support tool.

Pin Assignment

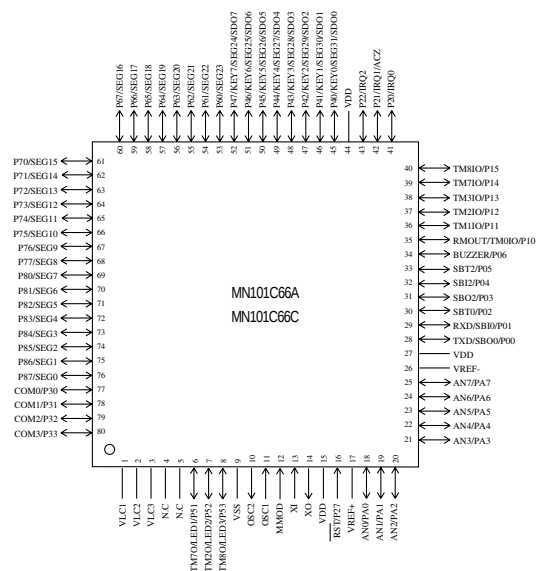

LQFP080-P-1414A *Pb free

TOFP080-P-1212D *Pb free

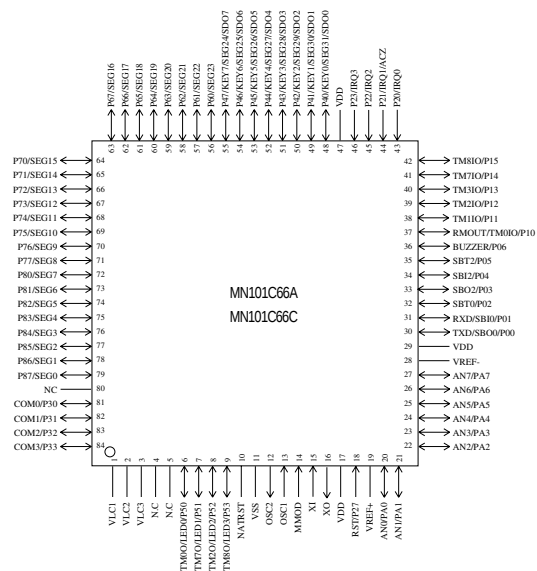

QFP084-P-1818E *Pb free

SupportTool

In-circuit Emulator

PX-ICE101C / D + PX-PRB101C66-QFP084-P-1818E-M

PX-ICE101C / D + PX-PRB101C66-LQFP080-P-1414A-M

EPROM Built-in Type

Type	MN101CP66C(under planning)
ROM (× 8-bit)	48 K
RAM (× 8-bit)	2 K
Minimum instruction execution time	0.1 μs (at 4.5 V to 5.5 V, 20 MHz) 0.25 μs (at 2.7 V to 5.5 V, 8 MHz) 62.5 μs (at 2.3 V to 5.5 V, 32 kHz)
Package	LQFP080-P-1414A *Pb free, QFP084-P-1818E *Pb free , TOFP080-P-1212D *Pb free

Flash Memory Built-in Type

Type	MN101CF66D (under planning)
ROM (× 8-bit)	64 K
RAM (× 8-bit)	2 K
Minimum instruction execution time	0.1 μs (at 4.5 V to 5.5 V, 20 MHz) 0.25 μs (at 4.5 V to 5.5 V, 8 MHz) 62.5 μs (at 4.5 V to 5.5 V, 32 kHz)
Package	LQFP080-P-1414A *Pb free, QFP084-P-1818E *Pb free, TQFP080-P-1212D *Pb free