

TOSHIBA PHOTOCOUPLER GaAs IRED &amp; PHOTO-TRIAC

## TLP3520A

TRIAC DRIVER

PROGRAMMABLE CONTROLLERS

AC-OUTPUT MODULE

SOLID STATE RELAY

The TOSHIBA TLP3520A consists of a photo-triac optically coupled to a gallium arsenide infrared emitting diode in a 16 lead plastic DIP package.

- Peak Off-State Voltage : 400V (MIN.)
- Trigger LED Current : 10mA (MAX.)
- On-State Current : 1.2A<sub>rms</sub> (MAX.)
- Isolation Voltage : 2500V<sub>rms</sub> (MIN.)
- Trigger LED Current

CLASSIFICATION*	TRIGGER LED CURRENT (mA)		MARKING OF CLASSIFICATION	
	V <sub>T</sub> =6V, Ta=25°C			
	MIN.	MAX.		
(IFT5)	—	5.0	T5	
(IFT7)	—	7.0	T5, T7	
Standard	—	10	T5, T7, Blank	


\*Ex. (IFT5) ; TLP3520A (IFT5)

(Note) Application type name for certification test, please

use standard product type name, i.e.

TLP3520A (IFT5) : TLP3520A


2 : ANODE  
 3 : CATHODE  
 4, 5, 6, 7 : N.C.  
 9, 13 : TRIAC T2  
 11 : TRIAC T1  
 15 : TRIAC GATE

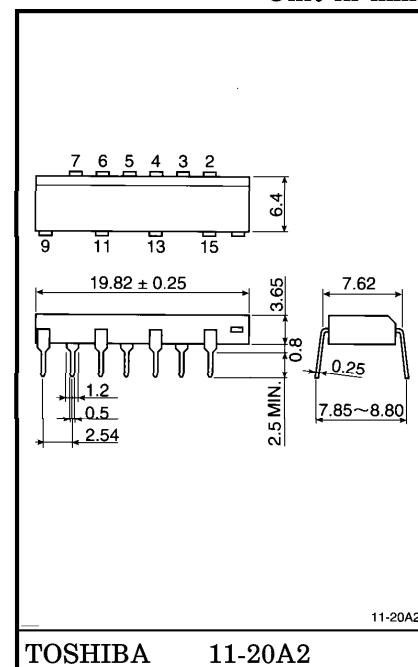

TOSHIBA 11-20A2

Weight : 1.13g

PIN CONFIGURATION (TOP VIEW)

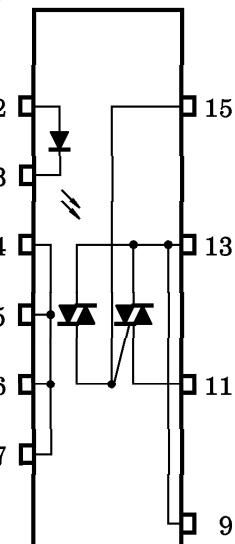

MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	$I_F$	50	mA
	Forward Current Derating ( $T_a \geq 53^\circ\text{C}$ )	$\Delta I_F / ^\circ\text{C}$	-0.7	mA / $^\circ\text{C}$
	Peak Forward Current (100 $\mu\text{s}$ pulse, 100pps)	$I_{FP}$	1	A
	Reverse Voltage	$V_R$	5	V
	Junction Temperature	$T_j$	125	$^\circ\text{C}$
DETECTOR	Off-State Output Terminal Voltage	$V_{DRM}$	400	V
	On-State RMS Current	$I_T$ (RMS)	1.2	A
			0.9	
	On-State Current Derating ( $T_a \geq 40^\circ\text{C}$ )	$\Delta I_T / ^\circ\text{C}$	-15	mA / $^\circ\text{C}$
	Peak Current from Snubber Circuit (100 $\mu\text{s}$ pulse, 120pps)	$I_{SP}$	2	A
	Peak Nonrepetitive Surge Current (50Hz, Peak)	$I_{TSM}$	10	A
	Junction Temperature	$T_j$	120	$^\circ\text{C}$
	Storage Temperature Range	$T_{stg}$	-40~125	$^\circ\text{C}$
Operating Temperature Range		$T_{opr}$	-20~80	$^\circ\text{C}$
Lead Soldering Temperature (10s)		$T_{sol}$	260	$^\circ\text{C}$
Isolation Voltage (AC, 1 min., R.H. $\leq 60\%$ ) (Note)		$BVS$	2500	$V_{rms}$

(Note) Device considered a two terminal : LED side pins shorted together and DETECTOR side pins shorted together.

## RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	$V_{AC}$	—	—	120	$V_{ac}$
Forward Current	$I_F$	15	20	25	mA
Peak Current from Snubber Circuit	$I_{SP}$	—	—	1	A
Operating Temperature	$T_{opr}$	-20	—	80	$^\circ\text{C}$


## INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =10mA	1.0	1.15	1.3	V
	Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	—	—	10	μA
	Capacitance	C <sub>T</sub>	V=0, f=1MHz	—	30	—	pF
DETECTOR	Peak Off-State Current	I <sub>DRM</sub>	V <sub>DRM</sub> =400V, Ta=110°C	—	—	100	μA
	Peak On-State Voltage	V <sub>TM</sub>	I <sub>TM</sub> =1.5A	—	—	3.0	V
	Holding Current	I <sub>H</sub>	R <sub>L</sub> =100Ω	—	—	25	mA
	Critical Rate of Rise of Off-State Voltage	dv / dt	V <sub>in</sub> =120V <sub>rms</sub> (Fig.1)	200	500	—	V / μs
	Critical Rate of Rise of Commutating Voltage	dv / dt (c)	V <sub>in</sub> =120V <sub>rms</sub> , I <sub>T</sub> =1.0A <sub>rms</sub> (Fig.1)	—	5	—	V / μs






## COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	I <sub>FT</sub>	V <sub>T</sub> =6V	—	—	10	mA
Capacitance (Input to Output)	C <sub>S</sub>	V <sub>S</sub> =0, f=1MHz	—	1.5	—	pF
Isolation Resistance	R <sub>S</sub>	V <sub>S</sub> =500V	5×10 <sup>10</sup>	10 <sup>14</sup>	—	Ω
Isolation Voltage	BVS	AC, 1 minute	2500	—	—	V <sub>rms</sub>
		AC, 1 second, in oil	—	5000	—	
		DC, 1 minute, in oil	—	5000	—	V <sub>dc</sub>

Fig.1 : dv / dt TEST CIRCUIT

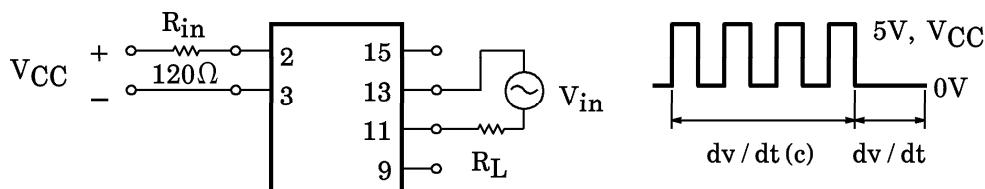

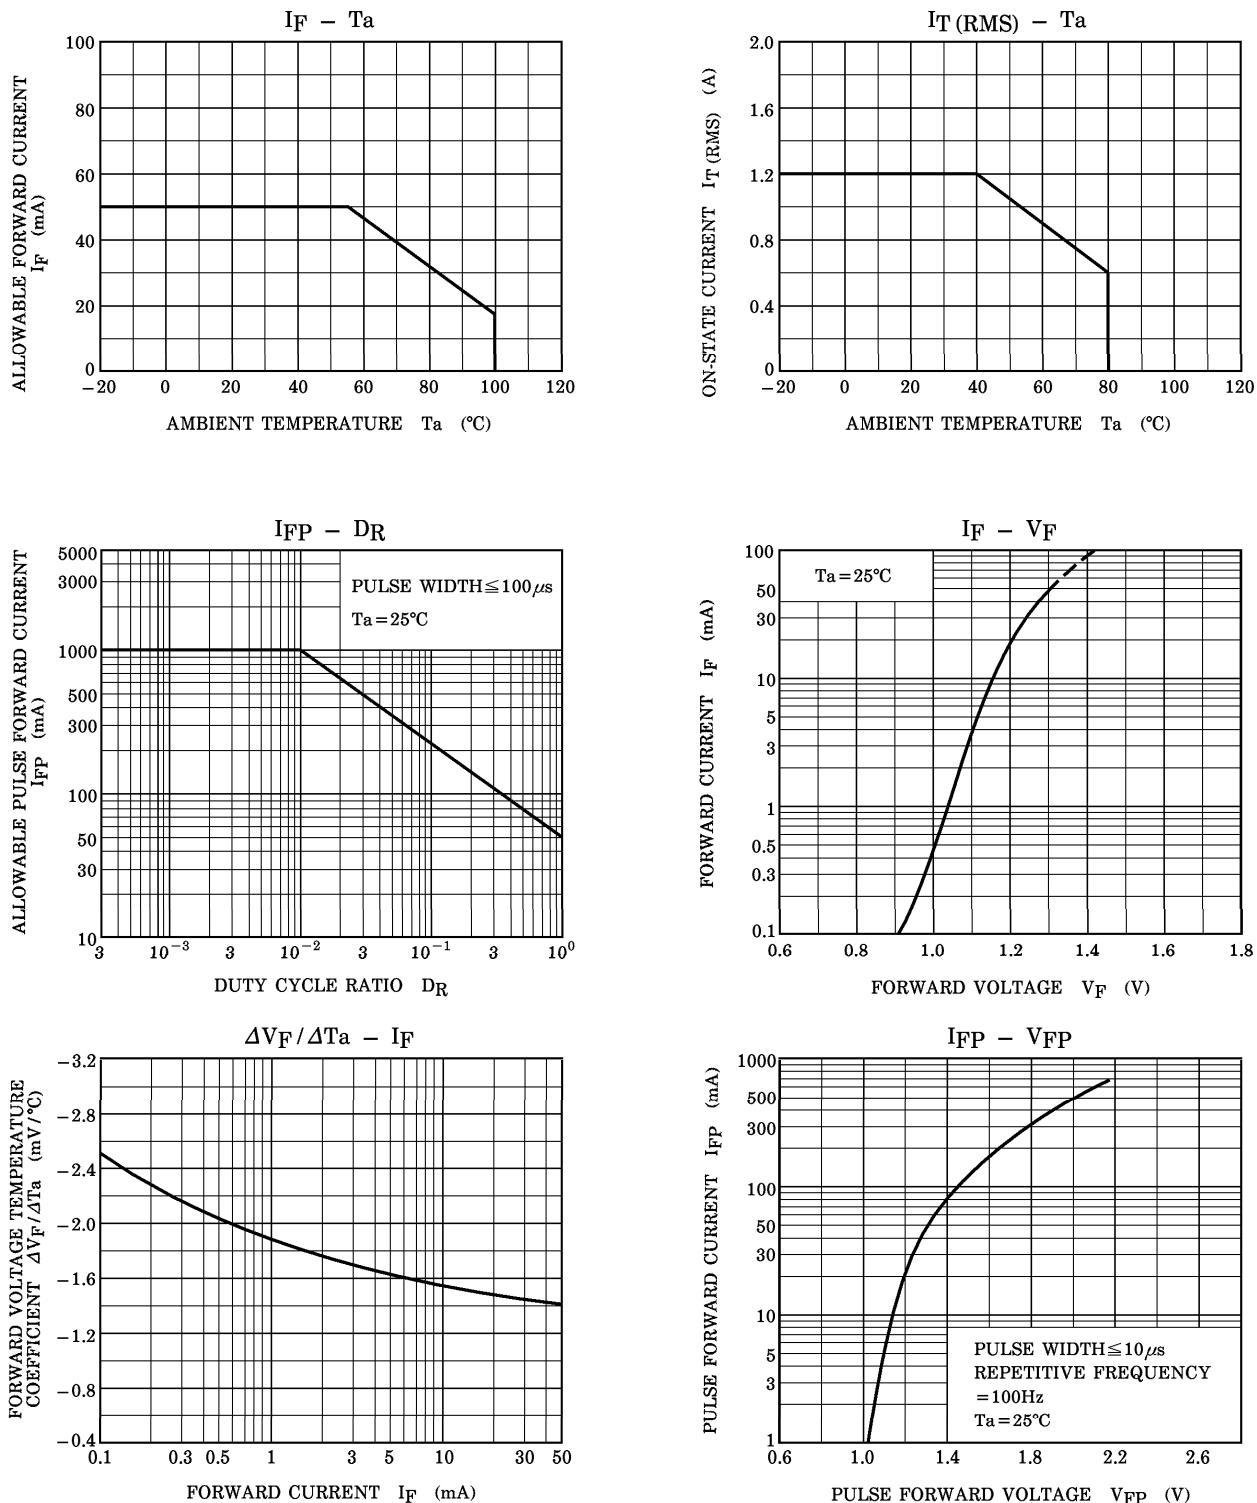

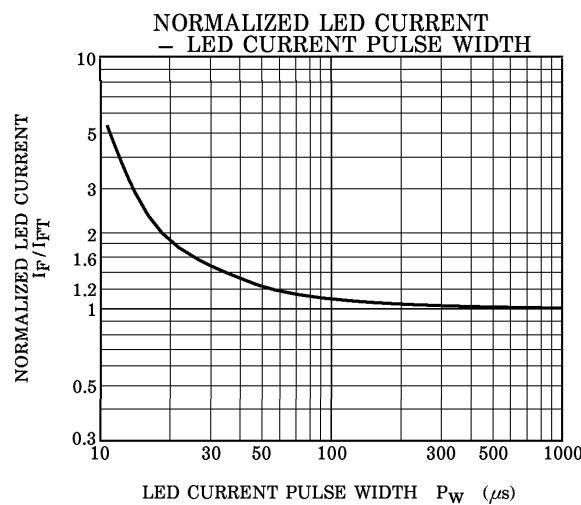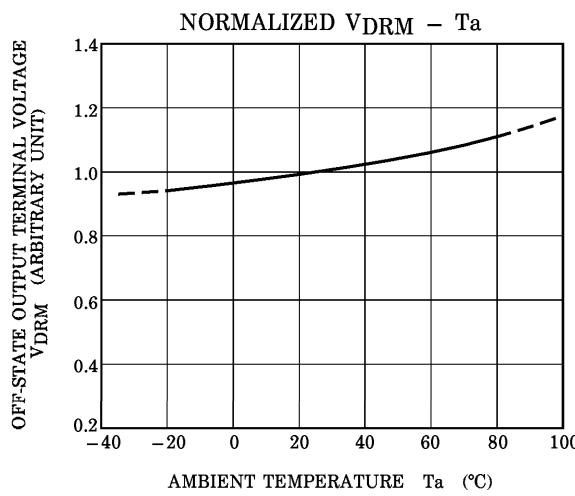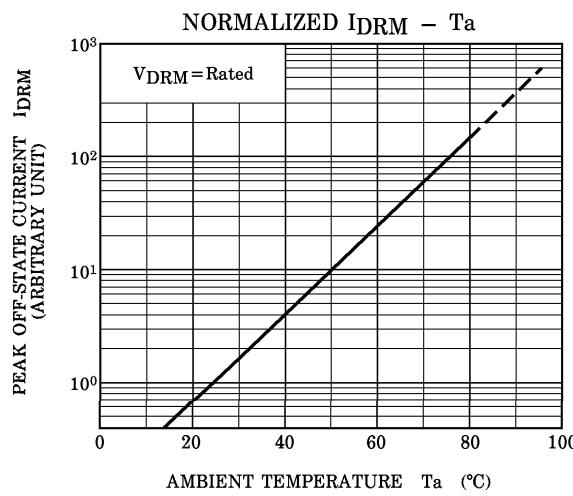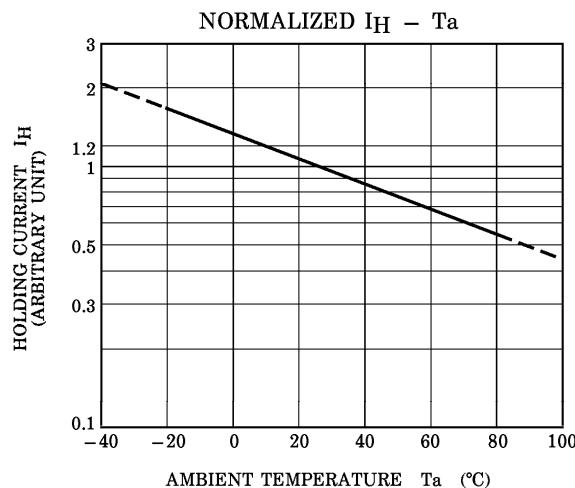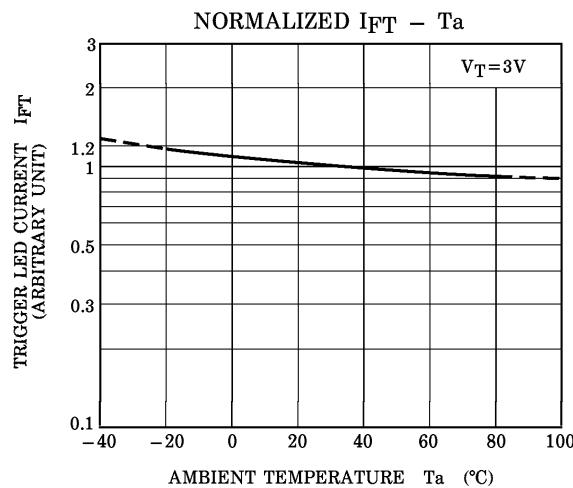

## RESTRICTIONS ON PRODUCT USE

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.