

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AG	53		0	RELEASED	25JAN06	JDP	JGH

D

C

B

A

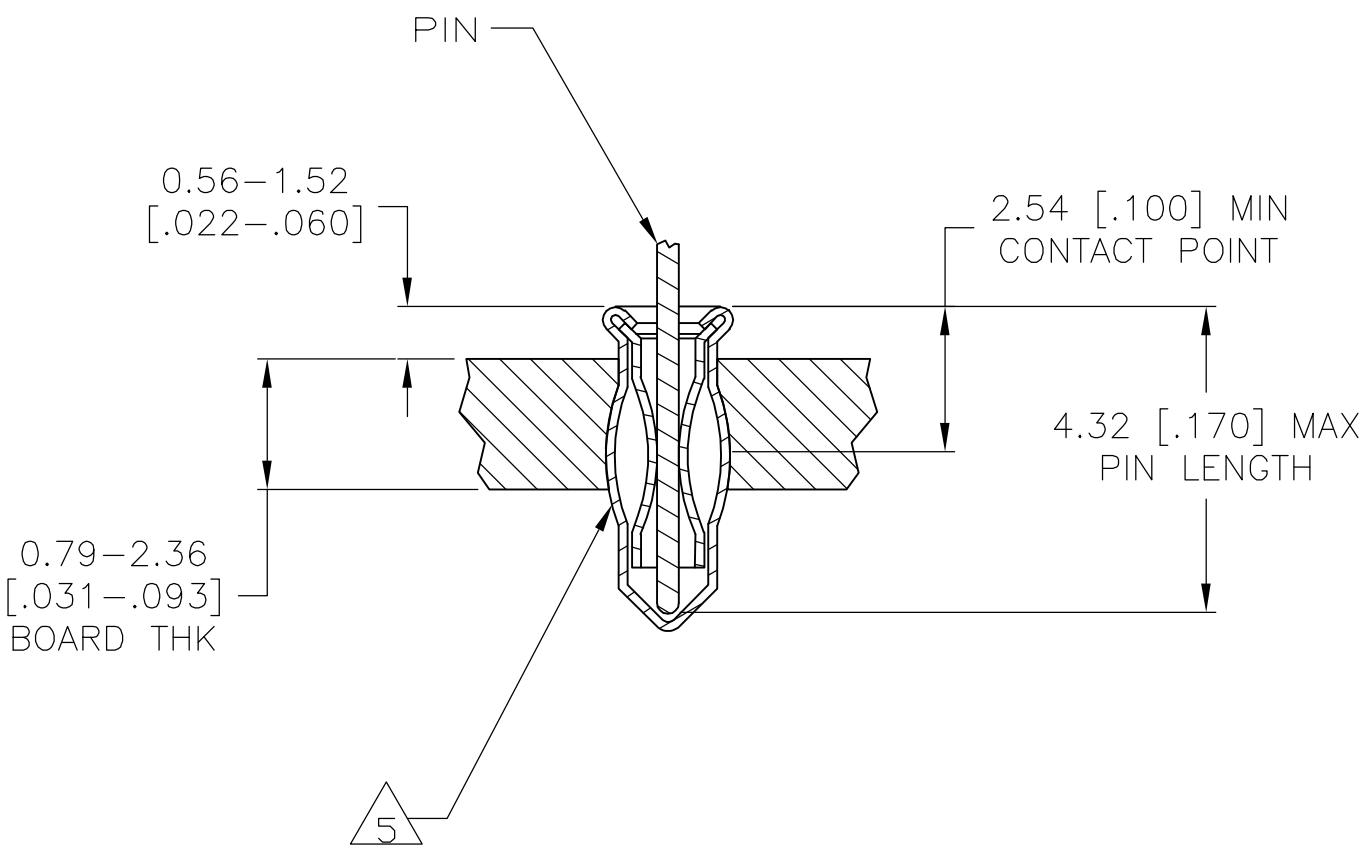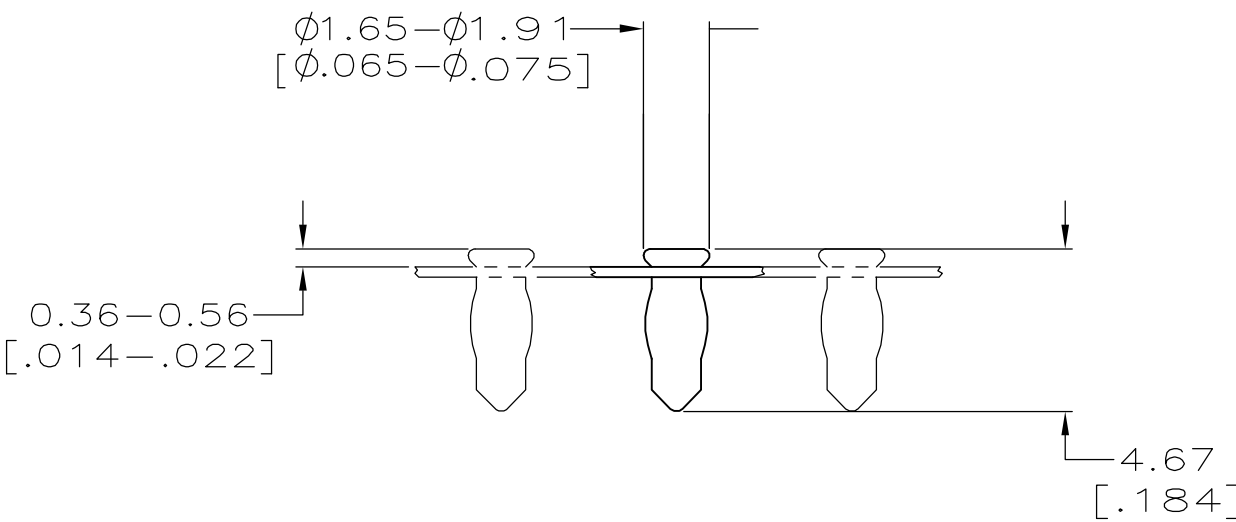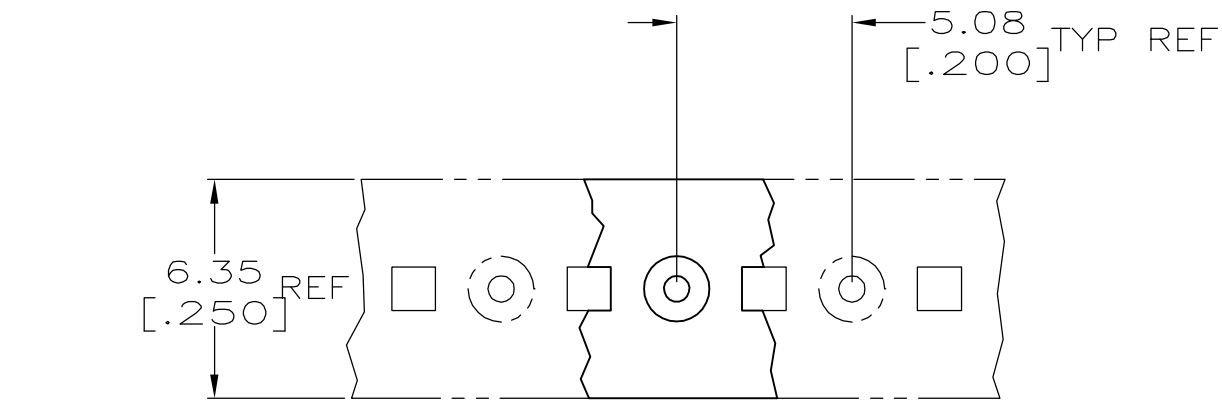

- 1 MATERIAL:
EYELET - COPPER PER ASTM B 152
SPRING - BERYLLIUM COPPER PER ASTM B 194
- 2 TIN PLATE PER ASTM B 545, 0.00254 [.000100] MIN THK.
- 3 PACKAGED, 50,000 PER REEL
- 4 TO INSURE 1/2 OZ MIN RETENTION DO NOT
EXCEED 0.10 [.004] DIFFERENCE IN PIN DIA WHEN
CHANGING TO A SMALLER DIA PIN
- 5 PRODUCT IS OVALIZED FOR RETENTION IN THE
P.C. BOARD. THE RECOMMENDED HOLE DIAMETER IS
1.32 [.052] MINIMUM, +0.08 [.003] MAX.
PRIOR TO SOLDERING.
- 6 PACKAGED 10,000 PER REEL

D

C

B

A

2.54-4.32 [.100-.170]	0.36-0.66 [0.014-0.026]	TIN 2	TIN 2	6 1-5645956-1
2.54-4.32 [.100-.170]	0.36-0.66 [0.014-0.026]	TIN 2	TIN 2	3 5645956-1
LENGTH	DIA 4	SPRING	EYELET	PART NO.
PIN		FINISH		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE 25JAN06		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK J. HAVENER 25JAN06					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. HAVENER 25JAN06		NAME	
		0 PLC ± -		PRODUCT SPEC		MINIATURE SPRING SOCKET ASSY SERIES 2 LONG WITHOUT SEALANT	
		1 PLC ± -		108-14008			
		2 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		3 PLC ± 0.20[.008]		114-26004			
MATERIAL		4 PLC ± -		WEIGHT		A2 00779 C=5645956 -	
		ANGLES ± ±		CUSTOMER DRAWING		SCALE 1:1 SHEET 1 of 1 REV 0	
FINISH		SEE TABLE					

5645956