




## HIGH-SPEED FULLY DIFFERENTIAL I/O AMPLIFIERS

### FEATURES

- **High Performance**
  - 100 MHz, –3 dB Bandwidth
  - 50 V/ $\mu$ s Slew Rate
  - 75 dB Total Harmonic Distortion at 1 MHz ( $V_O = 2 V_{PP}$ )
  - 5.4 nV/ $\sqrt{\text{Hz}}$  Input-Referred Noise (10 kHz)
- **Differential Input/Differential Output**
  - **Balanced Outputs Reject Common-Mode Noise**
  - **Differential Reduced Second Harmonic Distortion**
- **Power Supply Range**
  - $V_{DD} = 3.3 \text{ V}$

### KEY APPLICATIONS

- Simple Single-Ended To Differential Conversion
- Differential ADC Driver/Differential Antialiasing
- Differential Transmitter and Receiver
- Output Level Shifter

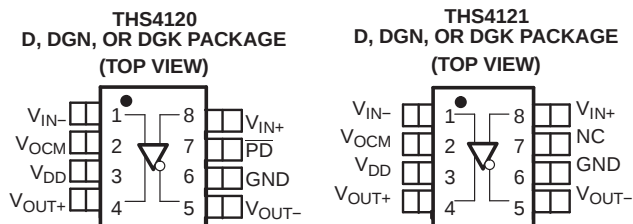

### DESCRIPTION

The THS412x is one in a family of fully differential-input, differential-output devices fabricated using Texas Instruments' state-of-the-art submicron CMOS process.

The THS412x consists of a true, fully differential signal path from input to output. This results in excellent common-mode noise rejection and improved total harmonic distortion.

**Table 1. HIGH-SPEED DIFFERENTIAL I/O FAMILY**

| DEVICE                 | NUMBER OF CHANNELS | POWERDOWN |
|------------------------|--------------------|-----------|
| THS4120 <sup>(1)</sup> | 1                  | Yes       |
| THS4121                | 1                  | –         |


(1) For proper functionality, an external 10-k $\Omega$  pullup resistor is required between the  $\overline{\text{PD}}$  pin and the positive supply.

### RELATED DEVICES

| DEVICE <sup>(1)</sup> | DESCRIPTION                                         | SINGLE SUPPLY VOLTAGE RANGE | SPLIT SUPPLY VOLTAGE RANGE |
|-----------------------|-----------------------------------------------------|-----------------------------|----------------------------|
| THS413x               | 150 MHz, 51 V/ $\mu$ s, 1.3 nV/ $\sqrt{\text{Hz}}$  | 5 V to 30 V                 | $\pm 2.5$ to $\pm 15$      |
| THS414x               | 160 MHz, 450 V/ $\mu$ s, 6.5 nV/ $\sqrt{\text{Hz}}$ | 5 V to 30 V                 | $\pm 2.5$ to $\pm 15$      |
| THS415x               | 150 MHz, 650 V/ $\mu$ s, 7.6 nV/ $\sqrt{\text{Hz}}$ | 5 V to 30 V                 | $\pm 2.5$ to $\pm 15$      |

(1) See the TI Web site for additional high-speed amplifier devices.

#### TYPICAL A/D APPLICATION CIRCUIT

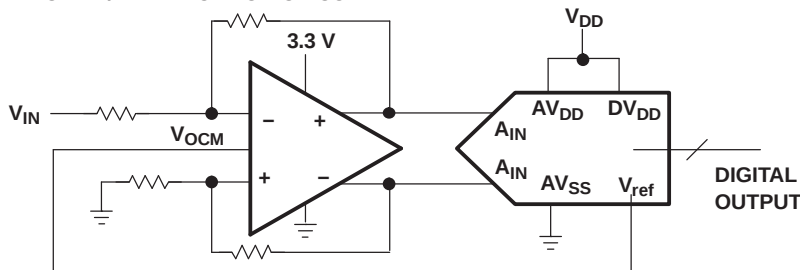

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### AVAILABLE OPTIONS

| T <sub>A</sub> | PACKAGED DEVICES |                |        |             |        | EVALUATION<br>MODULES |
|----------------|------------------|----------------|--------|-------------|--------|-----------------------|
|                | SMALL OUTLINE(D) | MSOP PowerPAD™ |        | MSOP        |        |                       |
|                |                  | (DGN)          | SYMBOL | (DGK)       | SYMBOL |                       |
| 0°C to 70°C    | THS4120CD        | THS4120CDGN    | ARL    | THS4120CDGK | ATZ    | THS4120EVM            |
|                | THS4121CD        | THS4121CDGN    | ASB    | THS4121CDGK | ATO    | THS4121EVM            |
| –40°C to 85°C  | THS4120ID        | THS4120IDGN    | ARM    | THS4120IDGK | ARN    | –                     |
|                | THS4121ID        | THS4121IDGN    | ASC    | THS4121IDGK | ASN    | –                     |

### ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                                                              |                                                                                          | UNIT                         |
|--------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------|
| Supply voltage, GND to V <sub>DD</sub>                       |                                                                                          | 3.6 V                        |
| V <sub>I</sub>                                               | Input voltage                                                                            | ±V <sub>DD</sub>             |
| I <sub>O</sub>                                               | Output current (sink) <sup>(2)</sup>                                                     | 110 mA                       |
| V <sub>ID</sub>                                              | Differential input voltage                                                               | ±V <sub>DD</sub>             |
| Continuous total power dissipation                           |                                                                                          | See Dissipation Rating Table |
| T <sub>J</sub>                                               | Maximum junction temperature <sup>(3)</sup>                                              | 150°C                        |
| T <sub>J</sub>                                               | Maximum junction temperature, continuous operation, long-term reliability <sup>(4)</sup> | 125°C                        |
| T <sub>A</sub>                                               | Operating free-air temperature                                                           |                              |
|                                                              | C suffix                                                                                 | 0°C to 70°C                  |
|                                                              | I suffix                                                                                 | –40°C to 85°C                |
| T <sub>stg</sub>                                             | Storage Temperature                                                                      | –65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 Inch) from case for 10 seconds |                                                                                          | 300°C                        |
| ESD ratings                                                  | HBM                                                                                      | 4000 V                       |
|                                                              | CDM                                                                                      | 1500 V                       |
|                                                              | MM                                                                                       | 200 V                        |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The THS412x may incorporate a PowerPad™ on the underside of the chip. This acts as a heatsink and must be connected to a thermally dissipative plane for proper power dissipation. Failure to do so may result in exceeding the maximum junction temperature which could permanently damage the device. See TI technical brief [SLMA002](#) and [SLMA004](#) for more information about utilizing the PowerPad™ thermally enhanced package.
- (3) The absolute maximum temperature under any condition is limited by the constraints of the silicon process.
- (4) The maximum junction temperature for continuous operation is limited by package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

### DISSIPATION RATING TABLE

| PACKAGE | θ <sub>JA</sub> <sup>(1)</sup> (°C/W) | θ <sub>JC</sub> (°C/W) | POWER RATING <sup>(2)</sup> |                       |
|---------|---------------------------------------|------------------------|-----------------------------|-----------------------|
|         |                                       |                        | T <sub>A</sub> = 25°C       | T <sub>A</sub> = 85°C |
| D       | 97.5                                  | 38.3                   | 1.02 W                      | 410 mW                |
| DGN     | 58.4                                  | 4.7                    | 1.71 W                      | 685 mW                |
| DGK     | 260                                   | 54.2                   | 385 mW                      | 154 mW                |

- (1) This data was taken using the JEDEC standard High-K test PCB.
- (2) Power rating is determined with a junction temperature of 125°C. This is the point where distortion starts to substantially increase. Thermal management of the final PCB should strive to keep the junction temperature at or below 125°C for best performance and long-term reliability.

## RECOMMENDED OPERATING CONDITIONS

|                 |                                | MIN           | TYP | MAX  | UNIT |
|-----------------|--------------------------------|---------------|-----|------|------|
| V <sub>DD</sub> | Supply voltage                 | Split supply  |     | ±1.5 | V    |
|                 |                                | Single supply |     | 3    |      |
| T <sub>A</sub>  | Operating free-air temperature | C suffix      |     | 0    | °C   |
|                 |                                | I suffix      |     | –40  |      |

## ELECTRICAL CHARACTERISTICS

V<sub>DD</sub> = 3.3 V, R<sub>L</sub> = 800 Ω, T<sub>A</sub> = 25°C (unless otherwise noted)<sup>(1)</sup>

| PARAMETER              |                                                                                                                                                                      | TEST CONDITIONS                                          |                                  | MIN | TYP | MAX | UNIT   |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------|-----|-----|-----|--------|
| DYNAMIC PERFORMANCE    |                                                                                                                                                                      |                                                          |                                  |     |     |     |        |
| BW                     | Small-signal bandwidth (–3 dB)                                                                                                                                       | V <sub>DD</sub> = 3.3 V,                                 | Gain = 1, R <sub>f</sub> = 200 Ω |     | 100 |     | MHz    |
| SR                     | Slew rate <sup>(2)</sup>                                                                                                                                             | V <sub>DD</sub> = 3.3 V,                                 | Gain = 1                         |     | 55  |     | V/μs   |
| t <sub>s</sub>         | Settling time to 0.1%                                                                                                                                                | Differential step voltage = 2 V <sub>PP</sub> , Gain = 1 |                                  |     | 60  |     | ns     |
|                        |                                                                                                                                                                      |                                                          |                                  | 292 |     |     |        |
| DISTORTION PERFORMANCE |                                                                                                                                                                      |                                                          |                                  |     |     |     |        |
| THD                    | Total harmonic distortion<br>Differential input, differential output<br>Gain = 1, R <sub>f</sub> = 200 Ω, R <sub>L</sub> = 800 Ω, V <sub>O</sub> = 2 V <sub>PP</sub> | V <sub>DD</sub> = 3.3 V,                                 | f = 1 MHz                        |     | –75 |     | dB     |
| THD                    | Total harmonic distortion<br>Differential input, differential output<br>Gain = 1, R <sub>f</sub> = 200 Ω, R <sub>L</sub> = 800 Ω, V <sub>O</sub> = 4 V <sub>PP</sub> | V <sub>DD</sub> = 3.3 V,                                 | f = 1 MHz                        |     | –66 |     | dB     |
|                        | Spurious free dynamic range (SFDR)<br>Differential input, differential output, V <sub>O</sub> = 4 V <sub>PP</sub>                                                    | R <sub>f</sub> = 200 Ω,                                  | f = 1 MHz                        |     | –69 |     | dB     |
|                        | Third intermodulation distortion                                                                                                                                     | V <sub>I</sub> = 0.071 V <sub>RMS</sub>                  | Gain = 1, f = 10 MHz             |     | –75 |     | dBc    |
| NOISE PERFORMANCE      |                                                                                                                                                                      |                                                          |                                  |     |     |     |        |
| V <sub>n</sub>         | Input voltage noise                                                                                                                                                  | f = 10 kHz                                               |                                  |     | 5.4 |     | nV/√Hz |
| I <sub>n</sub>         | Input current noise                                                                                                                                                  | f = 10 kHz                                               |                                  |     | 1   |     | fA/√Hz |
| DC PERFORMANCE         |                                                                                                                                                                      |                                                          |                                  |     |     |     |        |
| Open-loop gain         |                                                                                                                                                                      | T <sub>A</sub> = 25°C                                    |                                  | 60  | 66  |     | dB     |
|                        |                                                                                                                                                                      | T <sub>A</sub> = full range                              |                                  |     | 66  |     |        |
| V <sub>S</sub>         | Input offset voltage                                                                                                                                                 | T <sub>A</sub> = 25°C                                    |                                  |     | 3   | 8   | mV     |
|                        |                                                                                                                                                                      | T <sub>A</sub> = full range                              |                                  |     | 4   | 9   |        |
|                        | Input offset voltage, referred to V <sub>OCM</sub>                                                                                                                   | T <sub>A</sub> = 25°C                                    |                                  |     | 5   | 13  |        |
|                        |                                                                                                                                                                      | T <sub>A</sub> = full range                              |                                  |     |     | 14  |        |
|                        | Offset voltage drift                                                                                                                                                 | T <sub>A</sub> = full range                              |                                  |     | 25  |     | μV/°C  |
| I <sub>IB</sub>        | Input bias current                                                                                                                                                   | T <sub>A</sub> = full range                              |                                  |     | 1.2 |     | pA     |
| I <sub>OS</sub>        | Input offset current                                                                                                                                                 |                                                          |                                  |     | 100 |     | fA     |
|                        | Current offset drift                                                                                                                                                 | T <sub>A</sub> = full range                              |                                  |     | 5   |     | fA/°C  |

(1) The full range temperature is 0°C to 70°C for the C suffix, and –40°C to 85°C for the I suffix.

(2) Slew rate is measured differentially from an output level range of 25% to 75%.

## ELECTRICAL CHARACTERISTICS (Continued)

$V_{DD} = 3.3\text{ V}$ ,  $R_L = 800\ \Omega$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)<sup>(1)</sup>

| PARAMETER                                 |                                               | TEST CONDITIONS                                                |                             | MIN                           | TYP                     | MAX  | UNIT |
|-------------------------------------------|-----------------------------------------------|----------------------------------------------------------------|-----------------------------|-------------------------------|-------------------------|------|------|
| INPUT CHARACTERISTICS                     |                                               |                                                                |                             |                               |                         |      |      |
| CMRR                                      | Common-mode rejection ratio                   | T <sub>A</sub> = full range                                    |                             | 64                            | 96                      |      | dB   |
| V <sub>ICR</sub>                          | Common-mode input voltage range               | T <sub>A</sub> = full range                                    |                             | 0.65 to V <sub>DD</sub> – 0.1 | 0.35 to V <sub>DD</sub> |      | V    |
| r <sub>i</sub>                            | Input resistance (dc level)                   | Measured into each input terminal                              |                             |                               | 820                     |      | MΩ   |
| C <sub>i</sub>                            | Input capacitance, closed loop                |                                                                |                             |                               | 3                       |      | pF   |
| r <sub>o</sub>                            | Output resistance                             | See <a href="#">Figure 16</a>                                  |                             |                               | 1                       |      | Ω    |
| OUTPUT CHARACTERISTICS                    |                                               |                                                                |                             |                               |                         |      |      |
| V <sub>OH</sub>                           | High-level output Voltage                     | V <sub>IC</sub> = V <sub>DD</sub> /2, V <sub>DD</sub> = 3.3 V, | T <sub>A</sub> = 25°C       | 3.05                          | 3.15                    |      | V    |
| V <sub>OL</sub>                           | Low-level output Voltage                      | V <sub>IC</sub> = V <sub>DD</sub> /2, V <sub>DD</sub> = 3.3 V, | T <sub>A</sub> = 25°C       | 0.25                          | 0.15                    |      | V    |
| I <sub>O</sub>                            | Output current (sink), R <sub>L</sub> = 7 Ω   | V <sub>DD</sub> = 3.3 V,                                       | T <sub>A</sub> = 25°C       | 80                            | 100                     |      | mA   |
| I <sub>O</sub>                            | Output current (source), R <sub>L</sub> = 7 Ω | V <sub>DD</sub> = 3.3 V,                                       | T <sub>A</sub> = 25°C       | 20                            | 25                      |      | mA   |
| POWER SUPPLY                              |                                               |                                                                |                             |                               |                         |      |      |
| V <sub>DD</sub>                           | Supply voltage range                          | Single supply                                                  |                             |                               | 3.3                     |      | V    |
| I <sub>DD</sub>                           | Quiescent current (per amplifier)             | V <sub>DD</sub> = 3.3 V                                        | T <sub>A</sub> = 25°C       |                               | 11                      | 13.5 | mA   |
|                                           |                                               |                                                                | T <sub>A</sub> = full range |                               |                         | 16   |      |
| PSRR                                      | Power-supply rejection ratio                  | T <sub>A</sub> = 25°C                                          |                             | 68                            | 85                      |      | dB   |
| POWER-DOWN CHARACTERISTICS (THS4120 ONLY) |                                               |                                                                |                             |                               |                         |      |      |
| Power-down voltage level <sup>(2)</sup>   |                                               | Enable                                                         |                             | >1.4                          |                         | V    |      |
|                                           |                                               | Power down                                                     |                             | <1.2                          |                         |      |      |
| Power-down quiescent current              |                                               | T <sub>A</sub> = 25°C                                          |                             | 120                           |                         | μA   |      |
|                                           |                                               | T <sub>A</sub> = full range                                    |                             | 130                           |                         |      |      |
| t <sub>on</sub>                           | Turn-on time delay                            | 50% of final supply current value                              |                             | 4.8                           |                         | μs   |      |
| t <sub>off</sub>                          | Turn-off time delay                           |                                                                |                             | 3                             |                         | ns   |      |
| z <sub>o</sub>                            | Output impedance                              | f = 1 MHz                                                      |                             | 1                             |                         | kΩ   |      |

(1) The full range temperature is  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for the C suffix, and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for the I suffix.

(2) For detail information on the power-down circuit, see the power-down section in the application section of this data sheet.

## TYPICAL CHARACTERISTICS

### Table of Graphs

|                                 |                                             |                              | FIGURE  |
|---------------------------------|---------------------------------------------|------------------------------|---------|
| Small-signal frequency response |                                             |                              | 1       |
| SR                              | Slew rate                                   |                              | 2       |
| THD                             | Total harmonic distortion                   | vs Frequency                 | 3       |
|                                 |                                             | vs Output voltage            | 4       |
|                                 | Harmonic distortion                         | vs Frequency                 | 5, 6, 7 |
|                                 |                                             | vs Output voltage            | 8, 9    |
|                                 | Third intermodulation distortion            | vs Output voltage            | 10      |
| $V_O$                           | Output voltage                              | vs Load resistance           | 11      |
|                                 | Settling time                               |                              | 12      |
| $V_n$                           | Voltage noise                               | vs Frequency                 | 13      |
| $V_{OO}$                        | Output offset voltage                       | vs Common-mode input voltage | 14      |
| CMMR                            | Common-mode rejection ratio                 | vs Frequency                 | 15      |
| $Z_{os}$                        | Single-ended output impedance (closed loop) | vs Frequency                 | 16      |

# TYPICAL CHARACTERISTICS (continued)

|       |                                                         | FIGURE |
|-------|---------------------------------------------------------|--------|
| $Z_o$ | Single-ended ( $V_{OCM}$ ) input impedance vs Frequency | 17     |

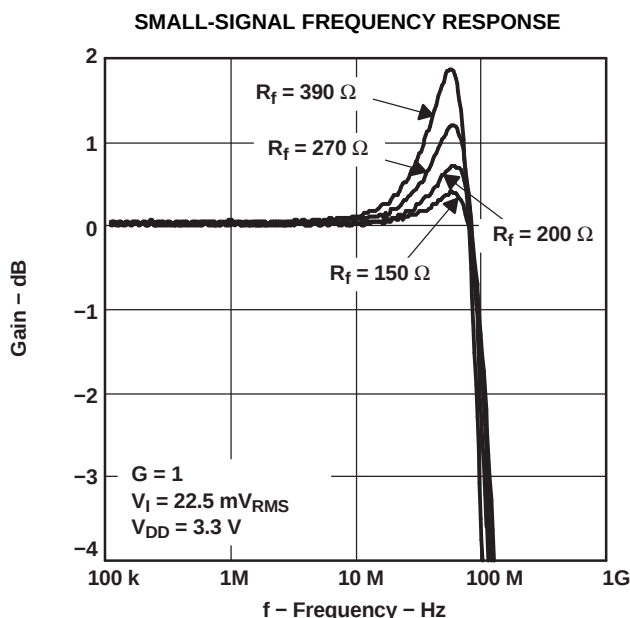


Figure 1.

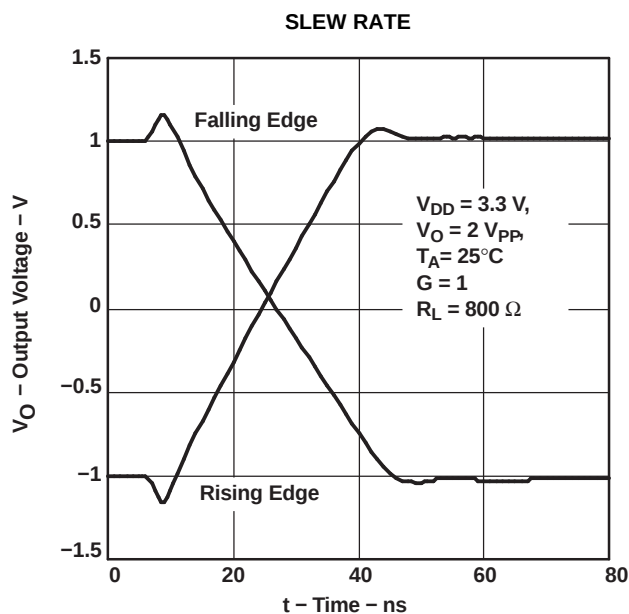


Figure 2.

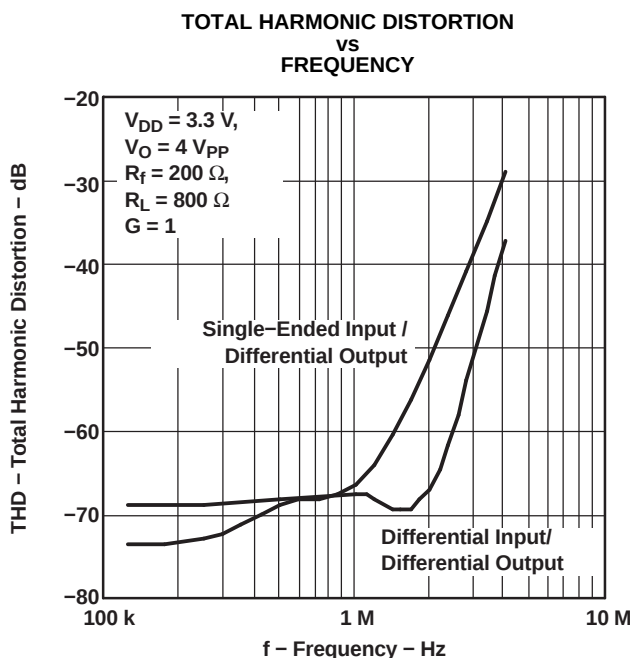


Figure 3.

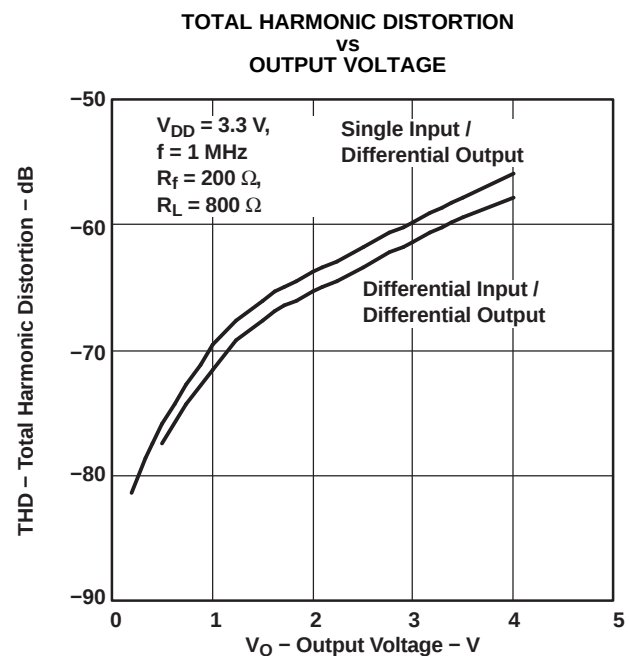


Figure 4.

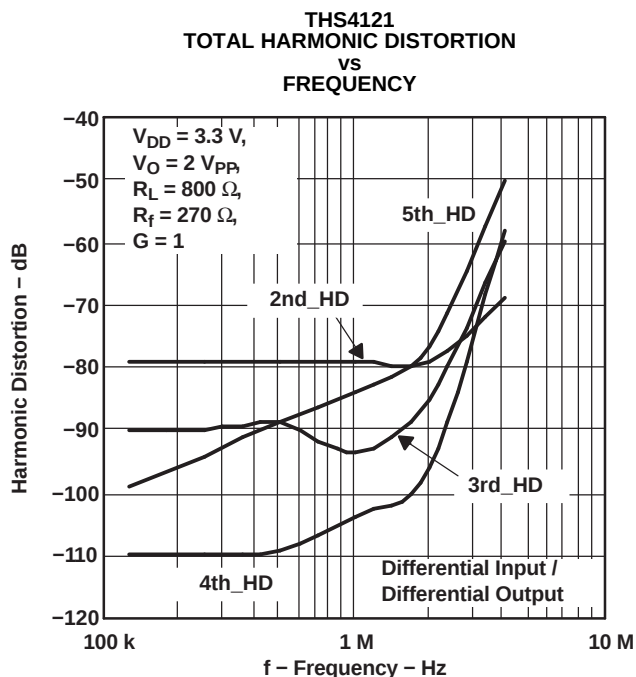


Figure 5.

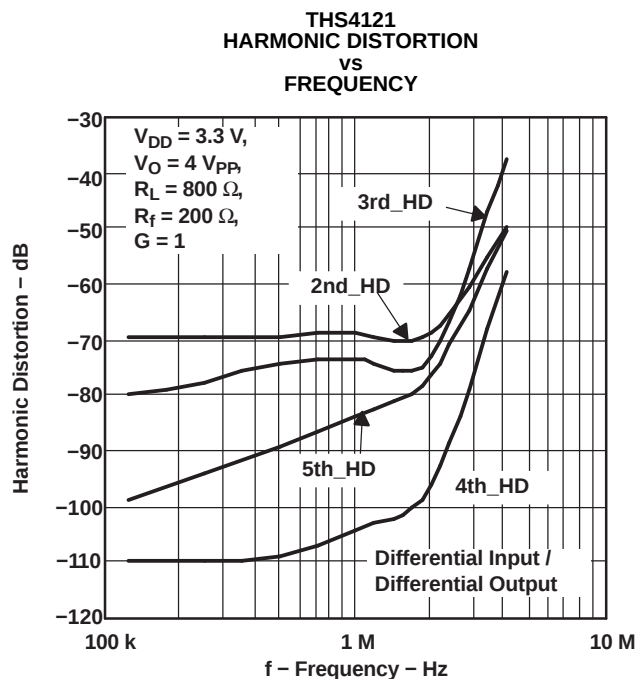


Figure 6.

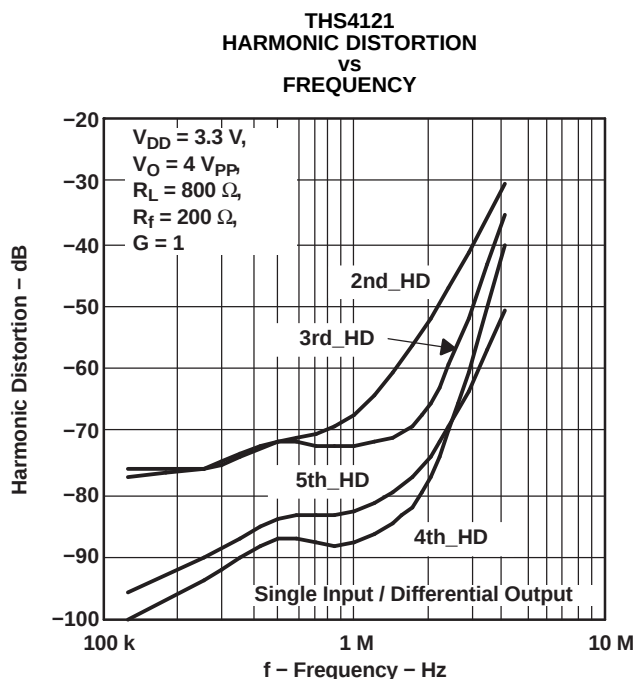


Figure 7.

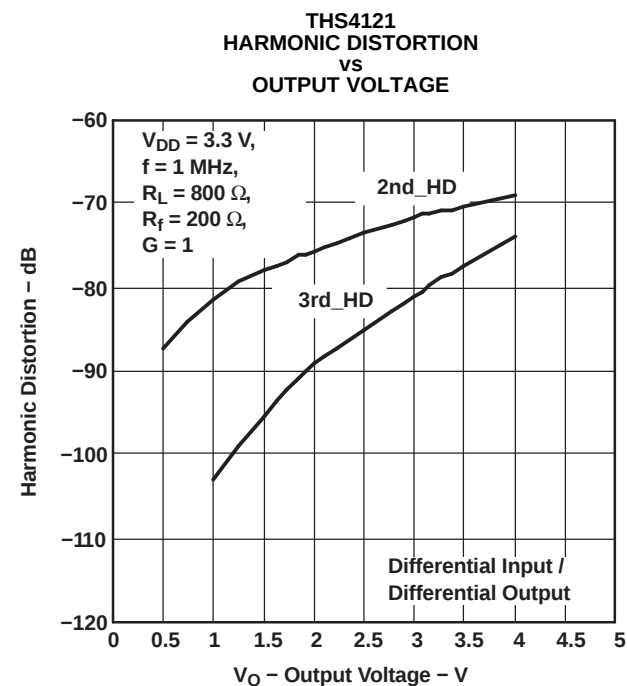


Figure 8.

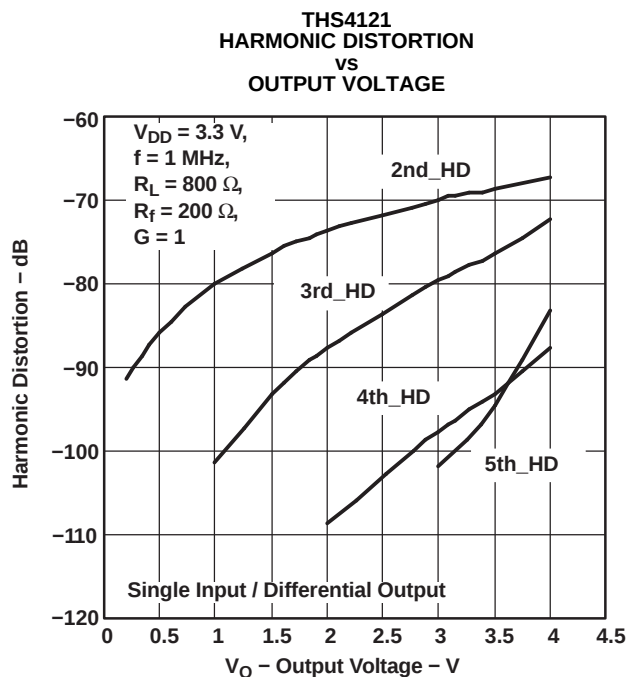


Figure 9.

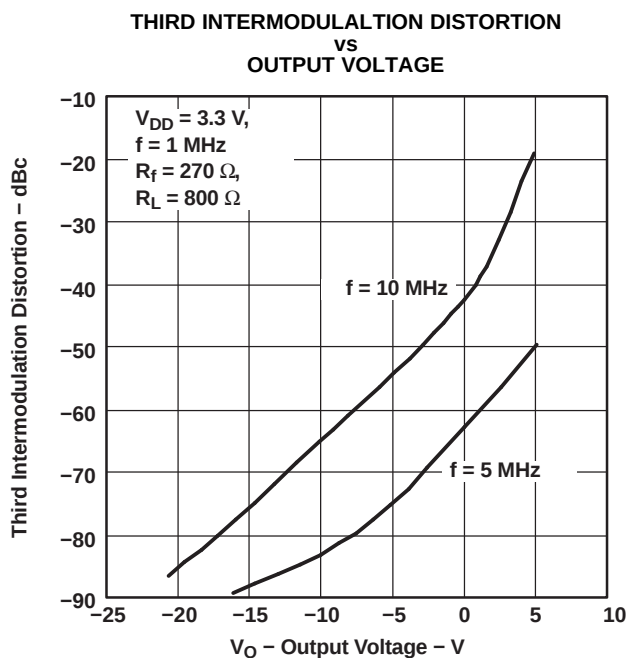


Figure 10.

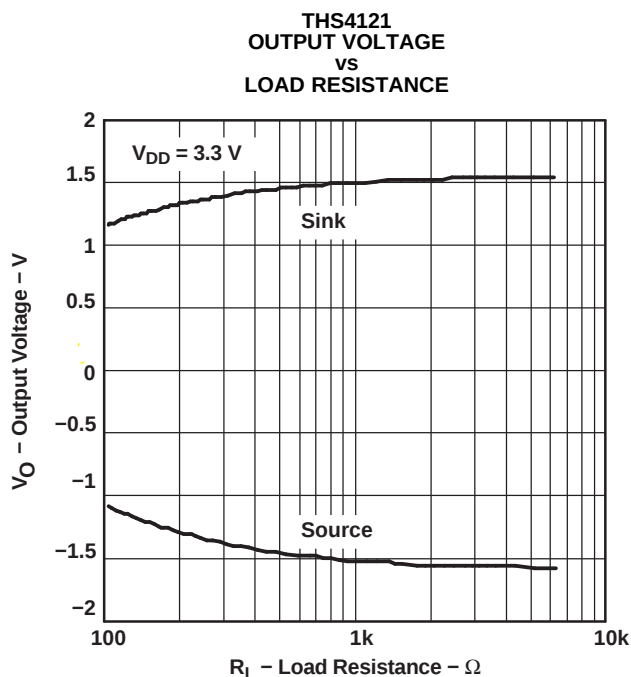


Figure 11.

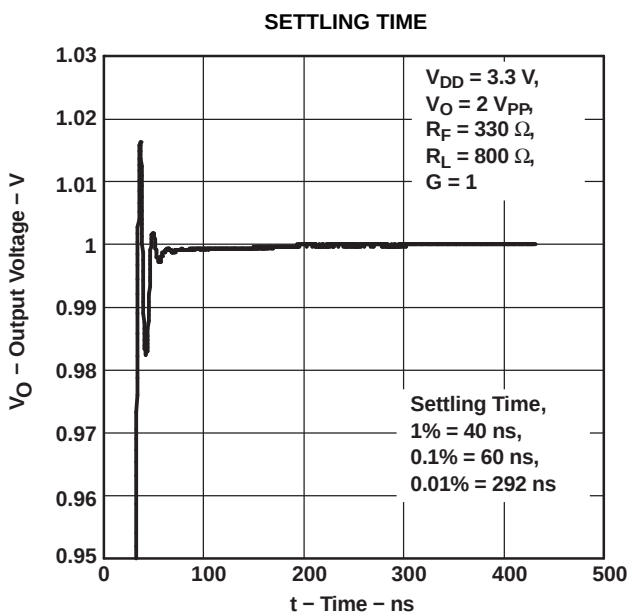


Figure 12.

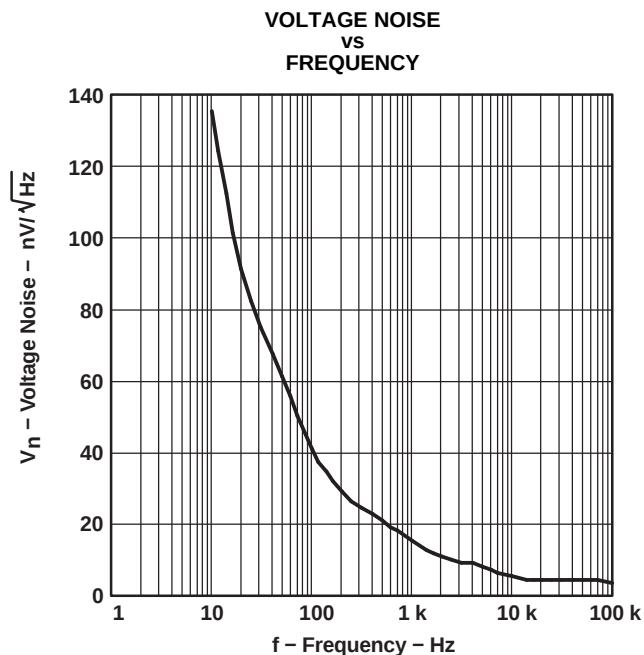


Figure 13.

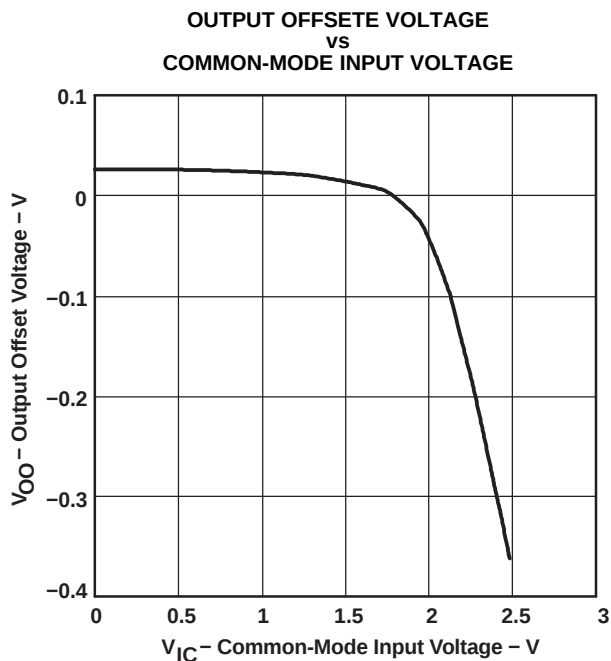


Figure 14.

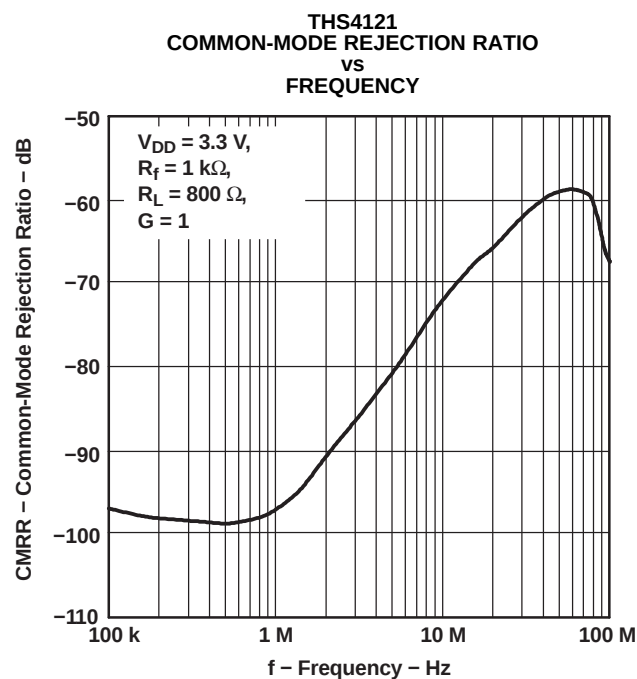


Figure 15.

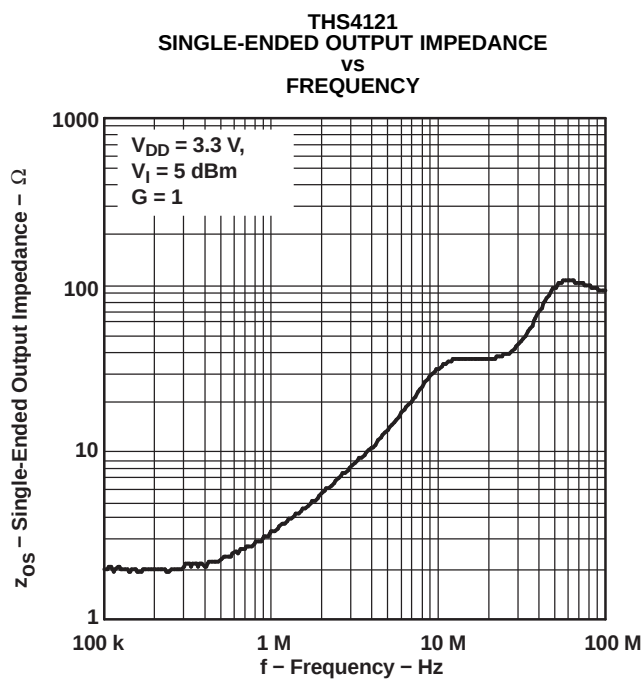


Figure 16.

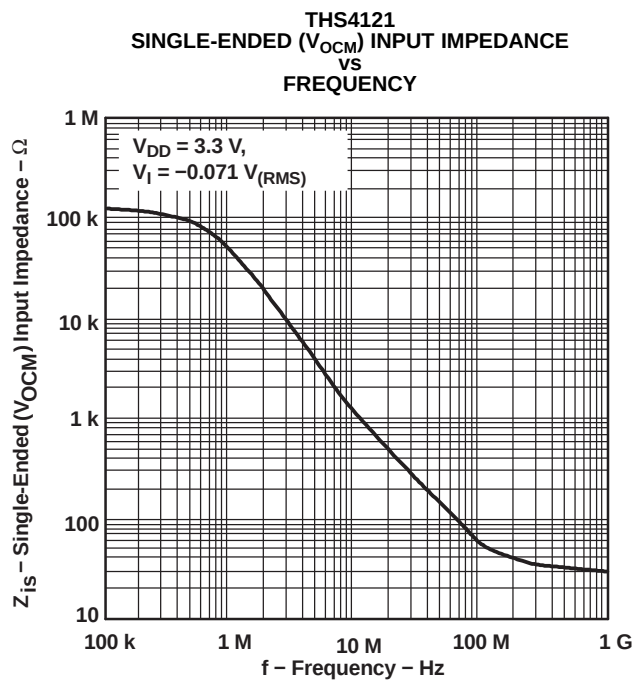


Figure 17.

## APPLICATION INFORMATION


## RESISTOR MATCHING

Resistor matching is important in fully differential amplifiers. The balance of the output on the reference voltage depends on matched ratios of the resistors. CMRR, PSRR, and cancellation of the second harmonic distortion diminish if resistor mismatch occurs. Therefore, it is recommended to use 1% tolerance resistors or better to keep the performance optimized.

V<sub>OCM</sub> sets the dc level of the output signals. If no voltage is applied to the V<sub>OCM</sub> pin, it is set to the midrail voltage internally defined as:

$$\frac{(V_{DD}) + (V_{SS})}{2} \quad (1)$$

In the differential mode, the  $V_{OCM}$  on the two outputs cancel each other. Therefore, the output in the differential mode is the same as the input with the gain of 1.  $V_{OCM}$  has a high bandwidth capability up to the typical operation range of the amplifier. For the prevention of noise going through the device, use a 0.1- $\mu$ F capacitor on the  $V_{OCM}$  pin as a bypass capacitor. The following graph shows the simplified diagram of the THS412x.

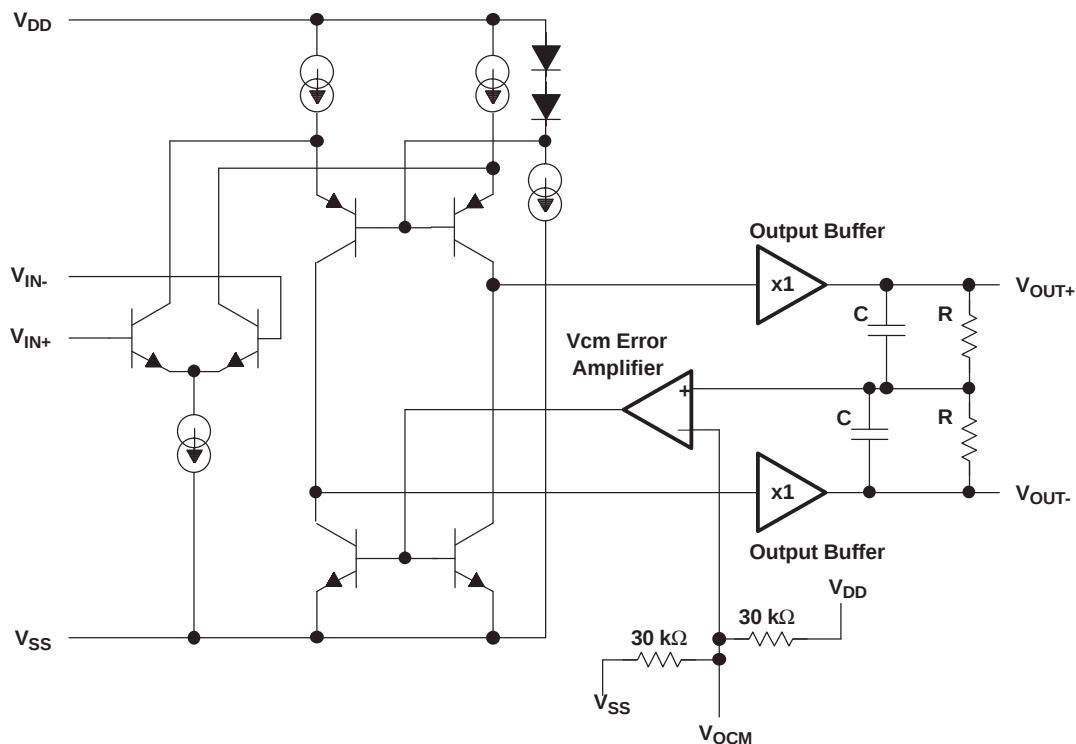

### Figure 18. THS412x Simplified Diagram

## APPLICATION INFORMATION (continued)

### DATA CONVERTERS

Data converters are one of the most popular applications for the fully differential amplifiers.

Fully differential amplifiers can operate with a single supply.  $V_{OCM}$  defaults to the midrail voltage,  $V_{DD}/2$ . The differential output may be fed into a data converter. This method eliminates the use of a transformer in the circuit. If the ADC has a reference voltage output ( $V_{ref}$ ), then it is recommended to connect it directly to the  $V_{OCM}$  of the amplifier using a bypass capacitor for stability. For proper operation, the input common-mode voltage to the input terminal of the amplifier should not exceed the common-mode input voltage range.

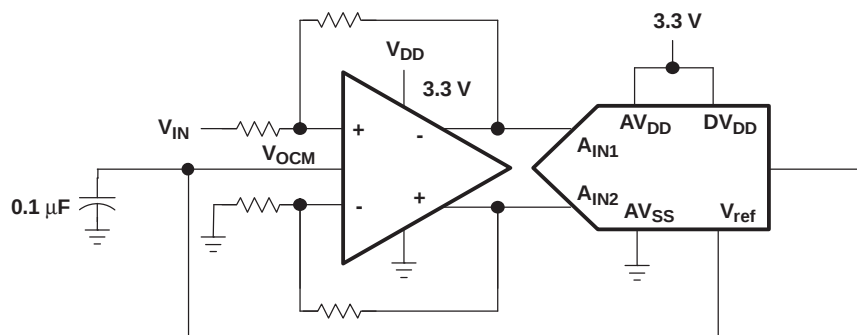


Figure 19. Differential Amplifier Using a Single Supply

Some single-supply applications may require the input voltage to exceed the common-mode input voltage range. In such cases, the following circuit configuration is suggested to bring the common-mode input voltage within the specifications of the amplifier.

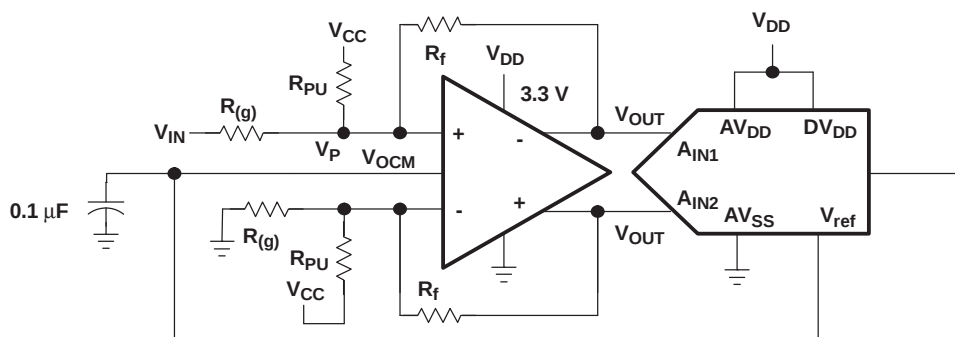


Figure 20. Circuit With Improved Common-Mode Input Voltage

The following equation is used to calculate  $R_{PU}$ :

$$R_{PU} = \frac{V_P - V_{DD}}{(V_{IN} - V_P) \frac{1}{R_{(g)}} + (V_{OUT} - V_P) \frac{1}{R_f}} \quad (2)$$

## APPLICATION INFORMATION (continued)

### DRIVING A CAPACITIVE LOAD

Driving capacitive loads with high-performance amplifiers is not a problem as long as certain precautions are taken. The first is to realize that the THS412x has been internally compensated to maximize its bandwidth and slew rate performance. When the amplifier is compensated in this manner, capacitive loading directly on the output decreases the device's phase margin leading to high-frequency ringing or oscillations. Therefore, for capacitive loads of greater than 10 pF, it is recommended that a resistor be placed in series with the output of the amplifier, as shown in Figure 21. A minimum value of 20  $\Omega$  should work well for most applications. For example, in 50- $\Omega$  transmission systems, setting the series resistor value to 50  $\Omega$  both isolates any capacitance loading and provides the proper line impedance matching at the source end.

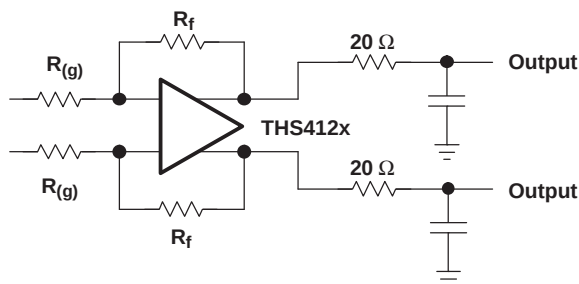


Figure 21. Driving a Capacitive Load

### ACTIVE ANTIALIAS FILTERING

For signal conditioning in ADC applications, it is important to limit the input frequency to the ADC. Low-pass filters can prevent the aliasing of the high-frequency noise with the frequency of operation. Figure 22 presents a method by which the noise may be filtered in the THS412x. Proper ground referencing should be considered.

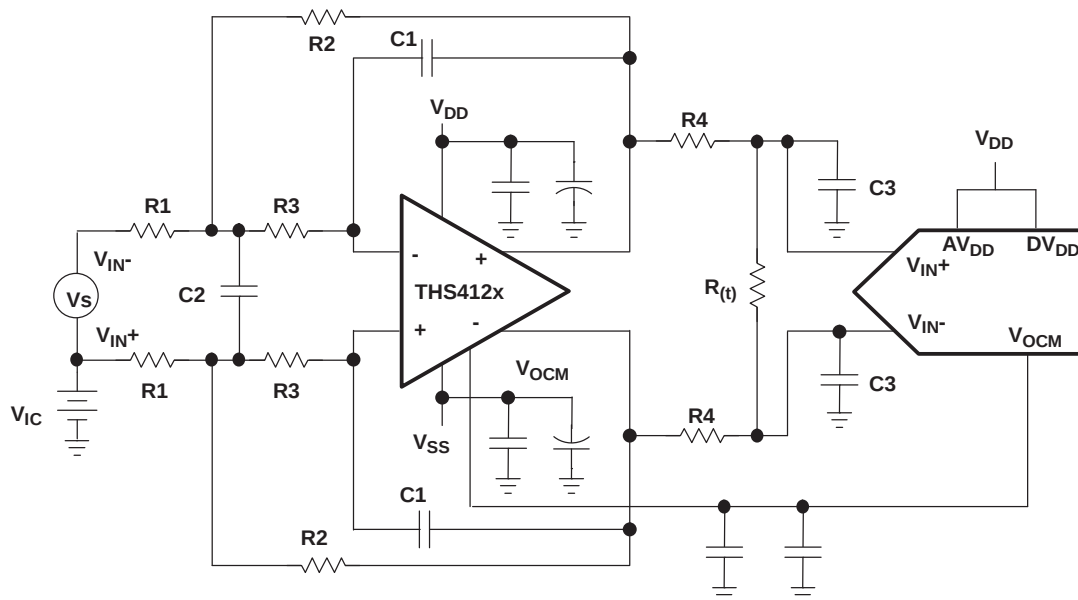


Figure 22. Antialias Filtering

## APPLICATION INFORMATION (continued)

The transfer function for this filter circuit is:

$$H_d(f) = \left[ \frac{K}{-\left(\frac{f}{\text{FSF} \times f_c}\right)^2 + \frac{1}{Q} \frac{jf}{\text{FSF} \times f_c} + 1} \right] \times \left[ \frac{\frac{R_t}{2R_4 + R_t}}{1 + \frac{j2\pi f R_4 R_t C_3}{2R_4 + R_t}} \right] \quad \text{Where } K = \frac{R_2}{R_1} \quad (3)$$

$$\text{FSF} \times f_c = \frac{1}{2\pi \sqrt{2 \times R_2 R_3 C_1 C_2}} \quad \text{and} \quad Q = \frac{\sqrt{2 \times R_2 R_3 C_1 C_2}}{R_3 C_1 + R_2 C_1 + K R_3 C_1} \quad (4)$$

K sets the pass-band gain,  $f_c$  is the cutoff frequency for the filter, FSF is a frequency scaling factor, and Q is the quality factor.

$$\text{FSF} = \sqrt{\text{Re}^2 + |\text{Im}|^2} \quad \text{and} \quad Q = \frac{\sqrt{\text{Re}^2 + |\text{Im}|^2}}{2\text{Re}} \quad (5)$$

Where Re is the real part, and Im is the imaginary part of the complex pole pair. Setting  $R_2 = R$ ,  $R_3 = mR$ ,  $C_1 = C$ , and  $C_2 = nC$  results in:

$$\text{FSF} \times f_c = \frac{1}{2\pi RC \sqrt{2 \times mn}} \quad \text{and} \quad Q = \frac{\sqrt{2 \times mn}}{1 + m(1 + K)} \quad (6)$$

Start by determining the ratios, m and n, required for the gain and Q of the filter type being designed, then select C and calculate R for the desired  $f_c$ .

## PRINCIPLES OF OPERATION

### THEORY OF OPERATION

The THS412x is a fully differential amplifier. Differential amplifiers are typically *differential in/single out*, whereas fully differential amplifiers are *differential in/differential out*.

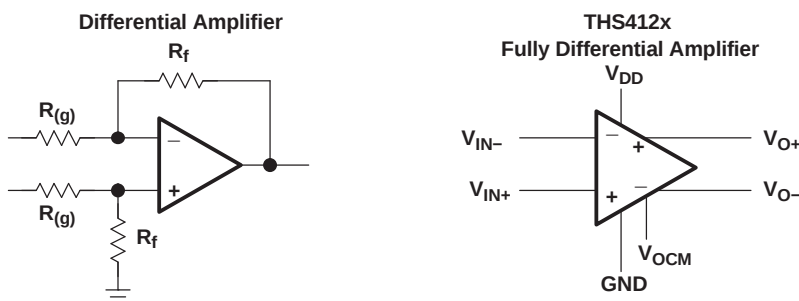


Figure 23. Differential Amplifier Versus a Fully Differential Amplifier

To understand the THS412x fully differential amplifiers, the definition for the pinouts of the amplifier are provided.

$$\text{Input voltage definition} \quad V_{ID} = (V_{I+}) - (V_{I-}) \quad V_{IC} = \frac{(V_{I+}) + (V_{I-})}{2} \quad (7)$$

$$\text{Output voltage definition} \quad V_{OD} = (V_{O+}) - (V_{O-}) \quad V_{OC} = \frac{(V_{O+}) + (V_{O-})}{2} \quad (8)$$

$$\text{Transfer function} \quad V_{OD} = V_{ID} \times A_{(f)} \quad (9)$$

$$\text{Output common-mode voltage } V_{OC} \quad (10)$$

## PRINCIPLES OF OPERATION (continued)

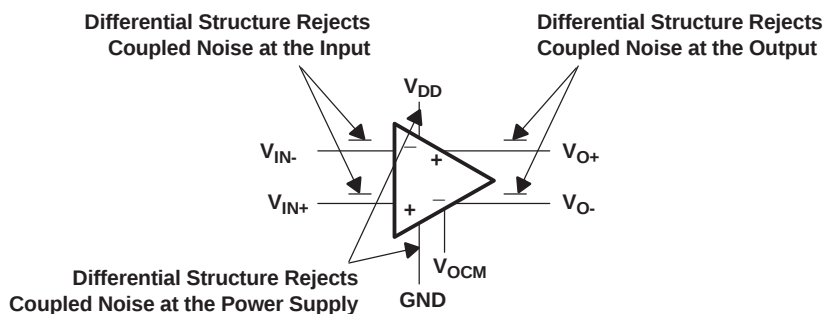


Figure 24. Definition of the Fully Differential Amplifier

The following schematics depict the differences between the operation of the THS412x, fully differential amplifier, in two different modes. Fully differential amplifiers can work with differential input or can be implemented as single in/differential out.


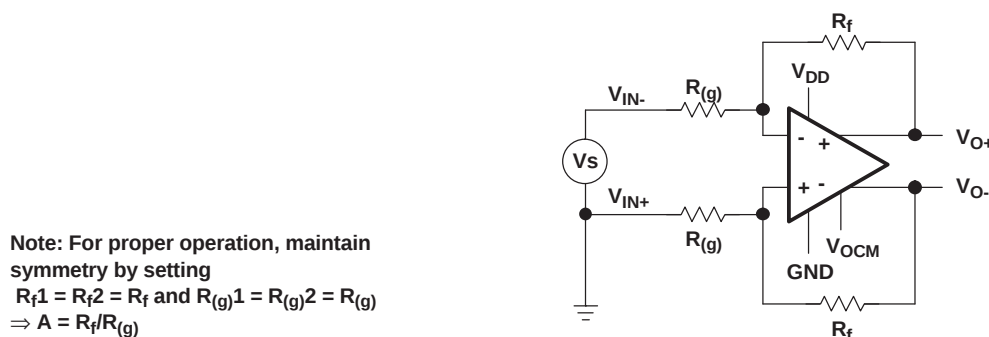


Figure 25. Amplifying Differential Signals

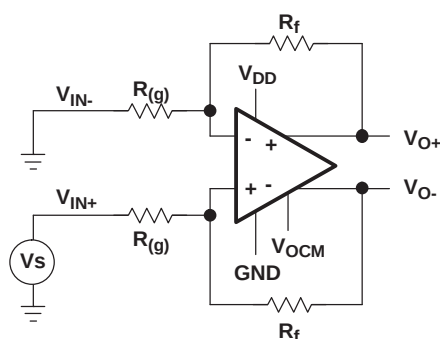

RECOMMENDED RESISTOR VALUES

| GAIN | $R_{(g)}$ $\Omega$ | $R_f$ $\Omega$ |
|------|--------------------|----------------|
| 1    | 150                | 150            |

Figure 26. Single In With Differential Out

If each output is measured independently, each output is one-half of the input signal when gain is 1. The following equations express the transfer function for each output:

$$V_O = \frac{1}{2} V_I \quad (11)$$

The second output is equal and opposite in sign:

$$V_O = -\frac{1}{2} V_I \quad (12)$$

## PRINCIPLES OF OPERATION (continued)

Fully differential amplifiers may be viewed as two inverting amplifiers. In this case, the equation of an inverting amplifier holds true for gain calculations. One advantage of fully differential amplifiers is that they offer twice as much dynamic range compared to single-ended amplifiers. For example, a  $1\text{-V}_{PP}$  ADC can only support an input signal of  $1\text{ V}_{PP}$ . If the output of the amplifier is  $2\text{ V}_{PP}$ , then it is not practical to feed a  $2\text{-V}_{PP}$  signal into the targeted ADC. Using a fully differential amplifier enables the user to break down the output into two  $1\text{-V}_{PP}$  signals with opposite signs and feed them into the differential input nodes of the ADC. In practice, the designer has been able to feed a  $2\text{-V}$  peak-to-peak signal into a  $1\text{-V}$  differential ADC with the help of a fully differential amplifier. The final result indicates twice as much dynamic range. Figure 27 illustrates the increase in dynamic range. The gain factor should be considered in this scenario. The THS412x fully differential amplifier offers an improved CMRR and PSRR due to its symmetrical input and output. Furthermore, second harmonic distortion is improved. Second harmonics tend to cancel because of the symmetrical output.

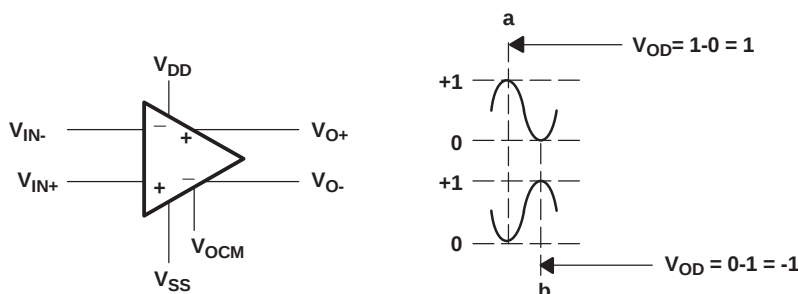


Figure 27. Fully Differential Amplifier With Two  $1\text{-V}_{PP}$  Signals

## CIRCUIT LAYOUT CONSIDERATIONS

To achieve the levels of high-frequency performance of the THS412x, follow proper printed-circuit board high frequency design techniques. A general set of guidelines is given below. In addition, a THS412x evaluation board is available to use as a guide for layout or for evaluating the device performance.

- Ground planes - It is highly recommended that a ground plane be used on the board to provide all components with a low inductive ground connection. However, in the areas of the amplifier inputs and output, the ground plane can be removed to minimize the stray capacitance.
- Proper power supply decoupling - Use a  $6.8\text{-}\mu\text{F}$  tantalum capacitor in parallel with a  $0.1\text{-}\mu\text{F}$  ceramic capacitor on each supply terminal. It may be possible to share the tantalum among several amplifiers depending on the application, but a  $0.1\text{-}\mu\text{F}$  ceramic capacitor should always be used on the supply terminal of every amplifier. In addition, the  $0.1\text{-}\mu\text{F}$  capacitor should be placed as close as possible to the supply terminal. As this distance increases, the inductance in the connecting trace makes the capacitor less effective. The designer should strive for distances of less than  $0.1\text{ inch}$  ( $2.54\text{ mm}$ ) between the device power terminals and the ceramic capacitors.
- Sockets - Sockets are not recommended for high-speed operational amplifiers. The additional lead inductance in the socket pins often lead to stability problems. Surface-mount packages soldered directly to the printed-circuit board is the best implementation.
- Short trace runs/compact part placements - Optimum high-frequency performance is achieved when stray series inductance has been minimized. To realize this, the circuit layout should be made as compact as possible, thereby minimizing the length of all trace runs. Particular attention should be paid to the inverting input of the amplifier. Its length should be kept as short as possible. This helps to minimize stray capacitance at the input of the amplifier.
- Surface-mount passive components - Using surface-mount passive components is recommended for high-frequency amplifier circuits for several reasons. First, because of the extremely low lead inductance of surface-mount components, the problem with stray series inductance is greatly reduced. Second, the small size of surface-mount components naturally leads to a more compact layout thereby minimizing both stray inductance and capacitance. If leaded components are used, it is recommended that the lead lengths be kept as short as possible.

## POWER-DOWN MODE

The THS4120 features a power-down pin ( $\overline{\text{PD}}$ ) which lowers the quiescent current from  $11\text{ mA}$  down to  $120\text{ }\mu\text{A}$ , ideal for reducing system power. The power-down pin of the amplifier must be pulled high via a  $10\text{-k}\Omega$  pullup resistor between the  $\overline{\text{PD}}$  pin and the positive supply (see Figure 28) in the absence of an applied voltage, putting

## PRINCIPLES OF OPERATION (continued)

the amplifier in the power-on mode of operation. To turn off (disable) the amplifier in an effort to conserve power, the power-down pin can be driven towards the negative rail or ground. The threshold voltages for power-on and power-down are relative to the supply rails and given in the specification tables. Above the *Enable Threshold Voltage*, the device is on. Below the *Disable Threshold Voltage*, the device is off. Behavior in between these threshold voltages is not specified.

Note that this power-down functionality is just that; the amplifier consumes less power in power-down mode. The power-down mode is not intended to provide a high-impedance output. The power-down functionality is not intended to allow use as a 3-state bus driver. When in power-down mode, the impedance looking back into the output of the amplifier is dominated by the feedback and gain-setting resistors, but the output impedance of the device itself varies depending on the voltage applied to the outputs.

The time delays associated with turning the device on and off are specified as the time it takes for the amplifier to reach 50% of the nominal quiescent current. The enable time delay is in the order of microseconds due to the amplifier moving in and out of the linear mode of operation.

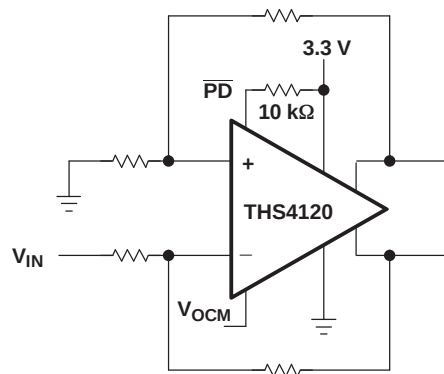


Figure 28.

Due to the similarity of the standard inverting amplifier configuration, the output impedance appears to be low while in the power-down state. This is because the feedback resistor ( $R_f$ ) and the gain resistor ( $R_{(g)}$ ) are still connected to the circuit. Therefore, a current path is allowed between the input of the amplifier and the output of the amplifier. An example of the closed-loop output impedance is shown in [Figure 29](#).

## PRINCIPLES OF OPERATION (continued)

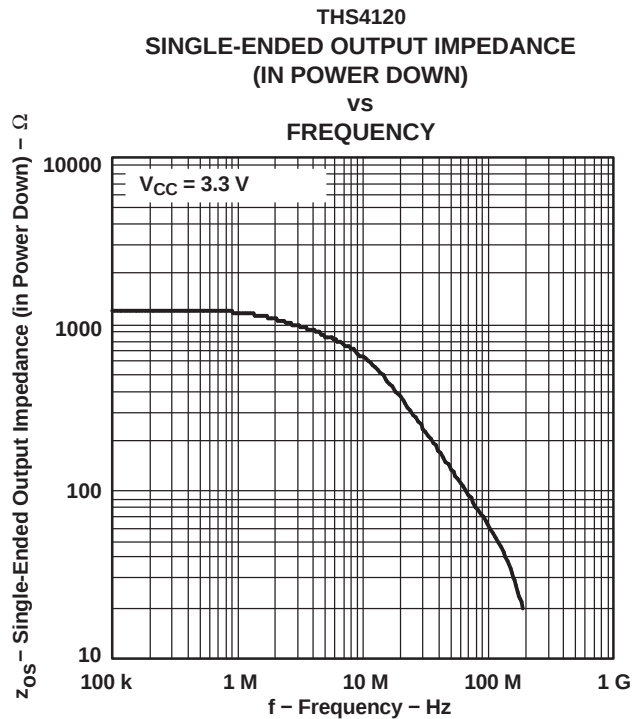


Figure 29.

## PRINCIPLES OF OPERATION (continued)


### GENERAL PowerPAD DESIGN CONSIDERATIONS (APPLICABLE TO DIFFERENTIAL AMPLIFIER FAMILY)

The THS412x is available packaged in a thermally enhanced DGN package, which is a member of the PowerPAD family of packages. This package is constructed using a downset leadframe on which the die is mounted [see Figure 30(a) and Figure 30(b)]. This arrangement results in the leadframe being exposed as a thermal pad on the underside of the package [see Figure 30(c)]. Because this thermal pad has direct thermal contact with the die, excellent thermal performance can be achieved by providing a good thermal path away from the thermal pad.

The PowerPAD package allows for both assembly and thermal management in one manufacturing operation. During the surface-mount solder operation (when the leads are being soldered), the thermal pad can also be soldered to a copper area underneath the package. Through the use of thermal paths within this copper area, heat can be conducted away from the package into either a ground plane or other heat-dissipating device.

The PowerPAD package represents a breakthrough in combining the small area and ease of assembly of the surface mount with the, heretofore, awkward mechanical methods of heatsinking.

More complete details of the PowerPAD installation process and thermal management techniques can be found in the Texas Instruments Technical Brief, *PowerPAD Thermally Enhanced Package* (SLMA002). This document can be found at the TI Web site ([www.ti.com](http://www.ti.com)) by searching on the key word PowerPAD. The document can also be ordered through your local TI sales office. Refer to literature number SLMA002 when ordering.

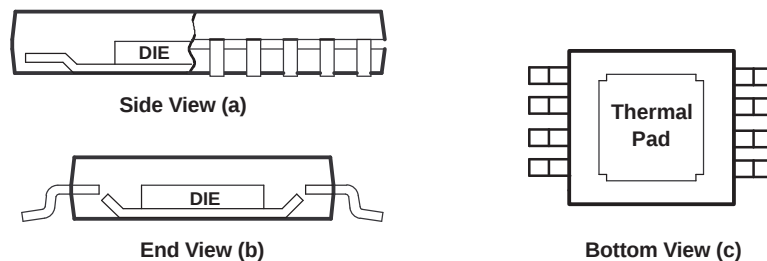

- A. The thermal pad is electrically isolated from all terminals in the package.

**Figure 30. Views of Thermally Enhanced DGN Package**

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">THS4120CD</a>    | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 4120C               |
| THS4120CD.A                  | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 4120C               |
| <a href="#">THS4120CDGN</a>  | Active        | Production           | HVSSOP (DGN)   8 | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | ARL                 |
| THS4120CDGN.A                | Active        | Production           | HVSSOP (DGN)   8 | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | ARL                 |
| <a href="#">THS4120ID</a>    | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 4120I               |
| THS4120ID.A                  | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 4120I               |
| <a href="#">THS4120IDGK</a>  | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ARN                 |
| THS4120IDGK.A                | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ARN                 |
| <a href="#">THS4120IDGN</a>  | Active        | Production           | HVSSOP (DGN)   8 | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ARM                 |
| THS4120IDGN.A                | Active        | Production           | HVSSOP (DGN)   8 | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ARM                 |
| <a href="#">THS4120IDGNR</a> | Active        | Production           | HVSSOP (DGN)   8 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ARM                 |
| THS4120IDGNR.A               | Active        | Production           | HVSSOP (DGN)   8 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ARM                 |
| <a href="#">THS4121CD</a>    | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 4121C               |
| THS4121CD.A                  | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 4121C               |
| <a href="#">THS4121CDGK</a>  | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | ATO                 |
| THS4121CDGK.A                | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | ATO                 |
| <a href="#">THS4121CDGKR</a> | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | Yes         | Call TI   Nipdau                     | Level-1-260C-UNLIM                | 0 to 70      | ATO                 |
| THS4121CDGKR.A               | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | ATO                 |
| <a href="#">THS4121ID</a>    | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 4121I               |
| THS4121ID.A                  | Active        | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 4121I               |
| <a href="#">THS4121IDGK</a>  | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ASN                 |
| THS4121IDGK.A                | Active        | Production           | VSSOP (DGK)   8  | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ASN                 |
| <a href="#">THS4121IDGKR</a> | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ASN                 |
| THS4121IDGKR.A               | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ASN                 |
| THS4121IDGKRG4               | Active        | Production           | VSSOP (DGK)   8  | 2500   LARGE T&R      | -           | Call TI                              | Call TI                           | 0 to 70      |                     |
| <a href="#">THS4121IDGN</a>  | Active        | Production           | HVSSOP (DGN)   8 | 80   TUBE             | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 85    | ASC                 |
| THS4121IDGN.A                | Active        | Production           | HVSSOP (DGN)   8 | 80   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ASC                 |
| <a href="#">THS4121IDGNR</a> | Active        | Production           | HVSSOP (DGN)   8 | 2500   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 85    | ASC                 |
| THS4121IDGNR.A               | Active        | Production           | HVSSOP (DGN)   8 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ASC                 |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| THS4120IDGNR | HVSSOP       | DGN             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| THS4121CDGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| THS4121IDGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| THS4121IDGNR | HVSSOP       | DGN             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| THS4121IDGNR | HVSSOP       | DGN             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal


| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| THS4120IDGNR | HVSSOP       | DGN             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| THS4121CDGKR | VSSOP        | DGK             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| THS4121IDGKR | VSSOP        | DGK             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| THS4121IDGNR | HVSSOP       | DGN             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| THS4121IDGNR | HVSSOP       | DGN             | 8    | 2500 | 364.0       | 364.0      | 27.0        |

## TUBE




\*All dimensions are nominal

| Device        | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|---------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| THS4120CD     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4120CD.A   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4120ID     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4120ID.A   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4121CD     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4121CD.A   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4121ID     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4121ID.A   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4121IDGN   | DGN          | HVSSOP       | 8    | 80  | 330    | 6.55   | 500    | 2.88   |
| THS4121IDGN.A | DGN          | HVSSOP       | 8    | 80  | 330    | 6.55   | 500    | 2.88   |

**DGK0008A****PACKAGE OUTLINE****VSSOP - 1.1 mm max height**

SMALL OUTLINE PACKAGE

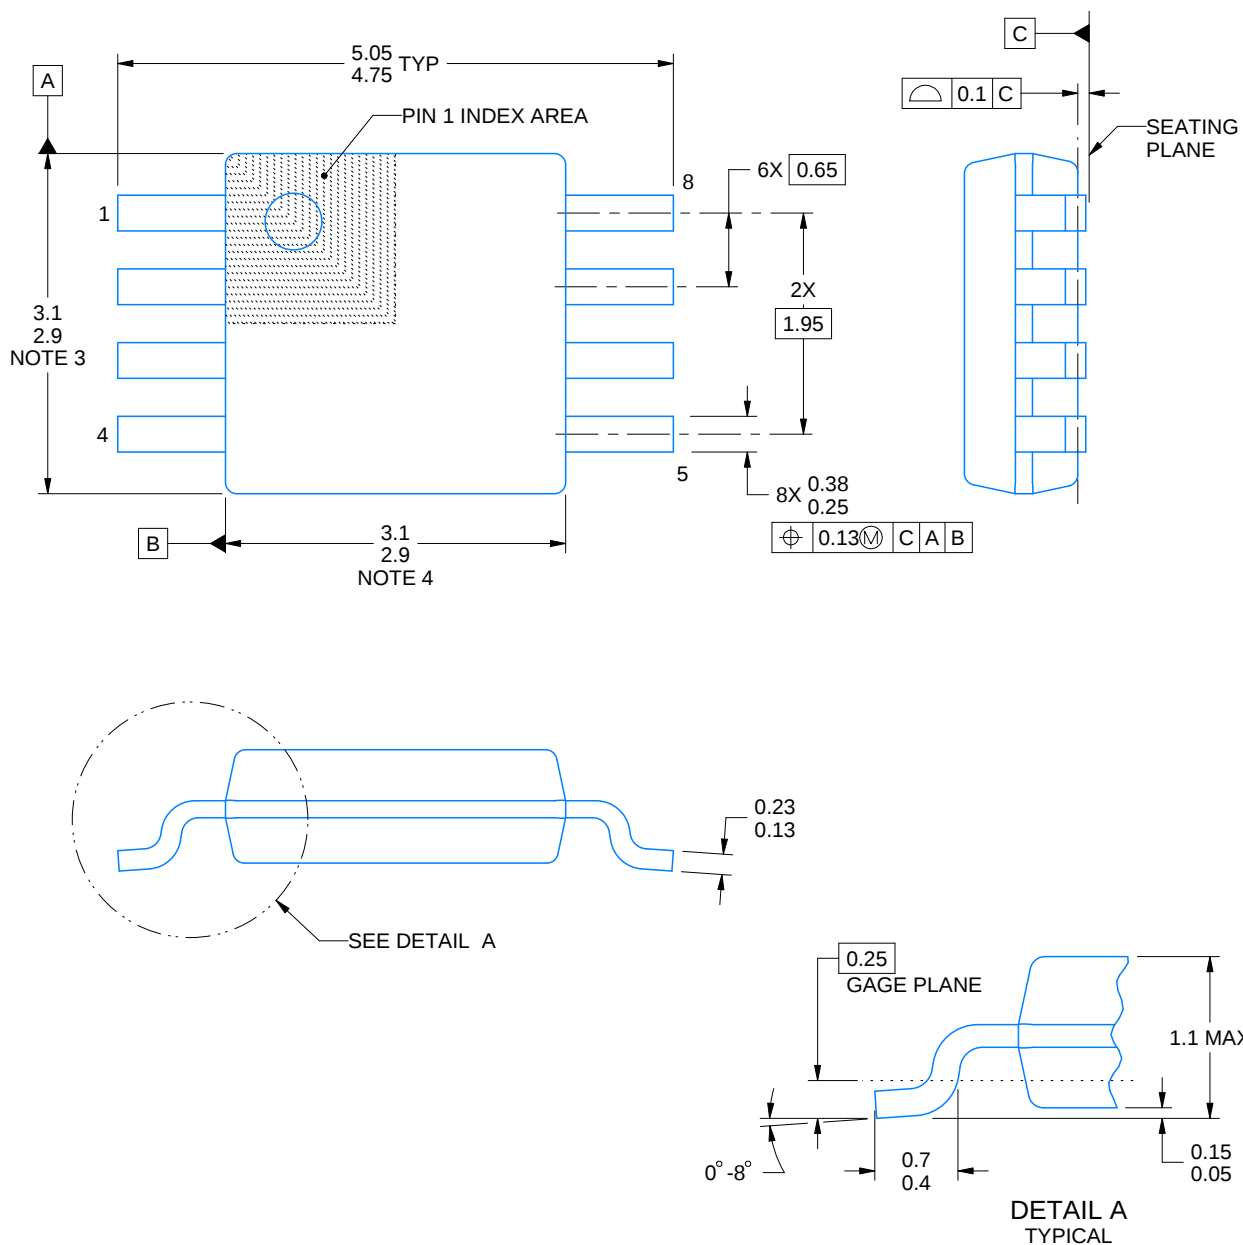

4214862/A 04/2023

**NOTES:**

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

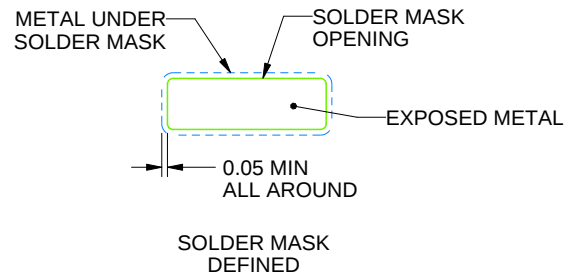

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

## EXAMPLE STENCIL DESIGN

DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

## GENERIC PACKAGE VIEW


**DGN 8**

**PowerPAD™ HVSSOP - 1.1 mm max height**



3 x 3, 0.65 mm pitch

SMALL OUTLINE PACKAGE

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

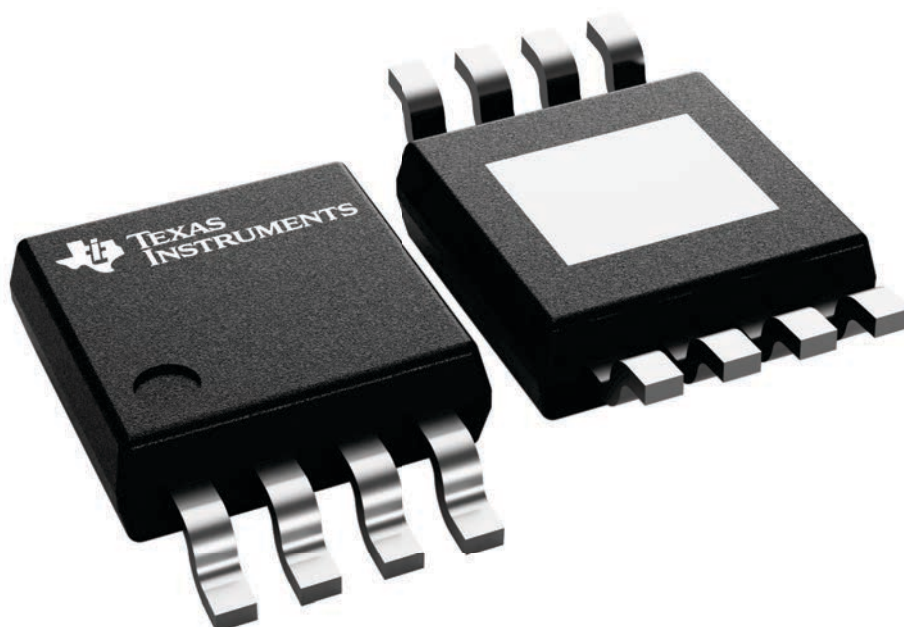

4225482/B

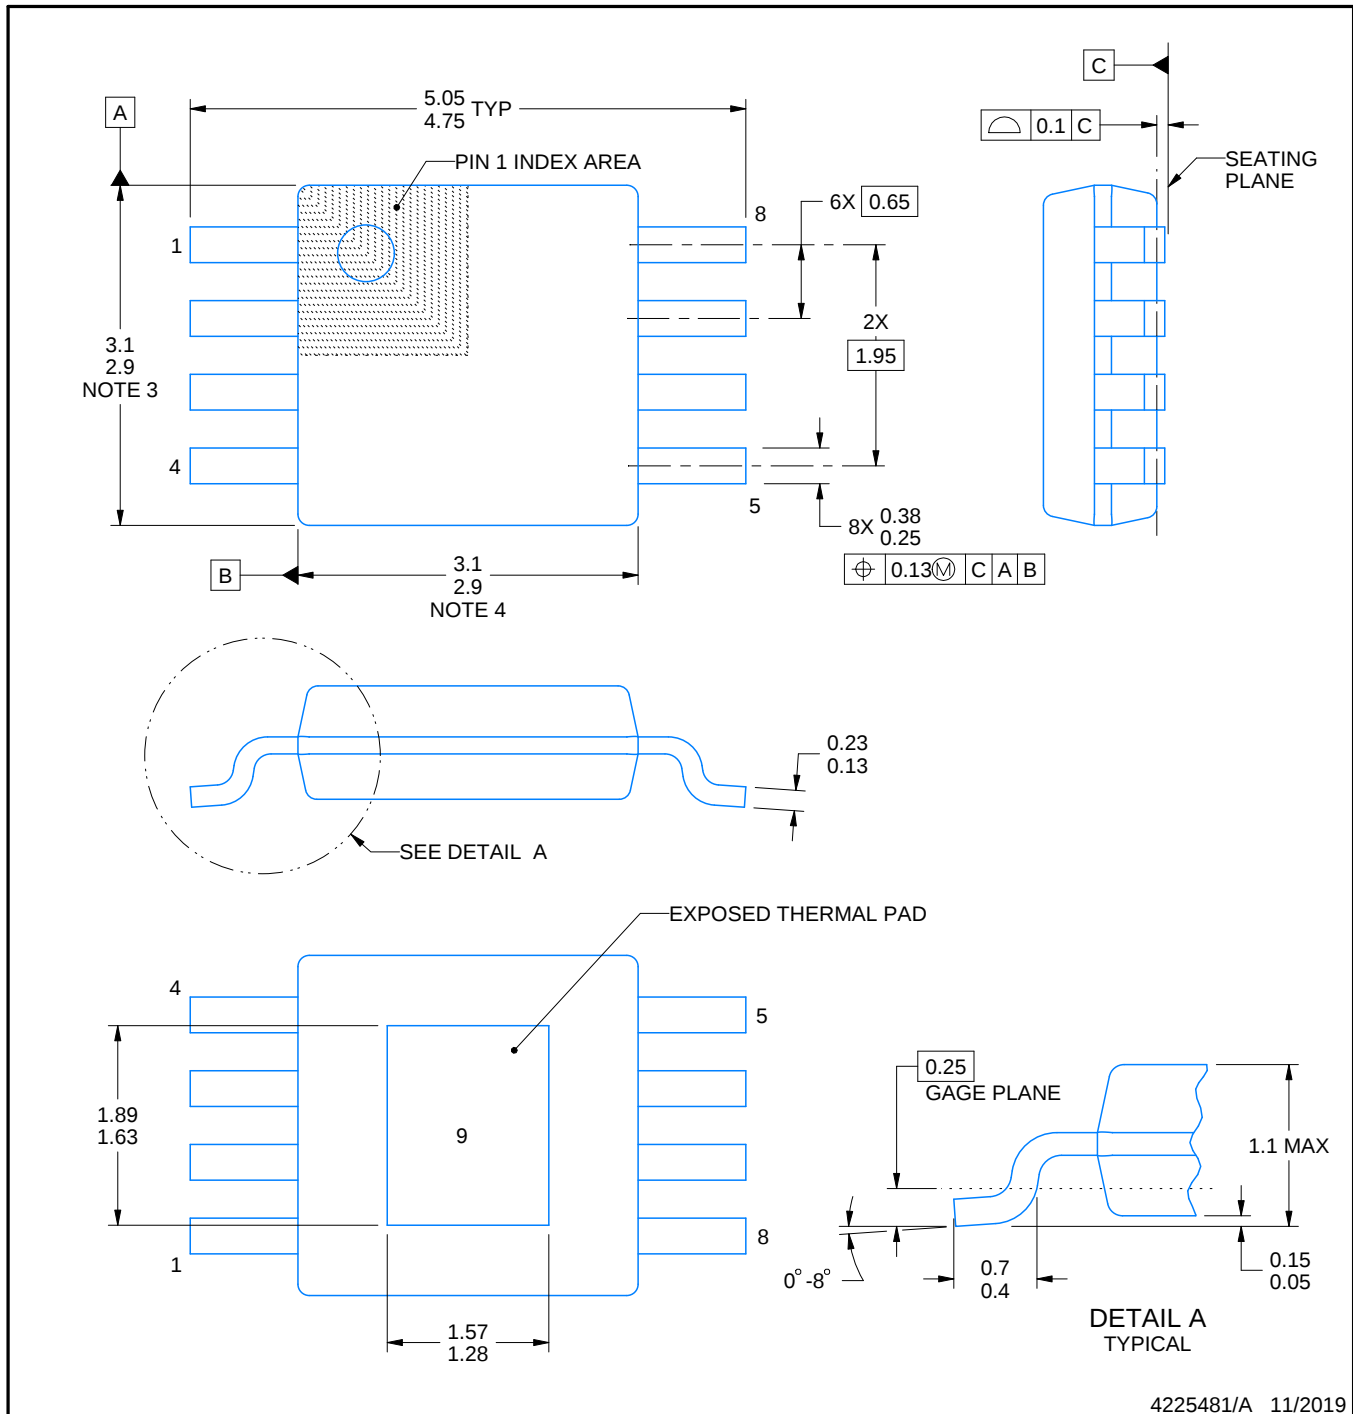

4225481/A 11/2019

## NOTES:


PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.


**DGN0008D**

## PowerPAD™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

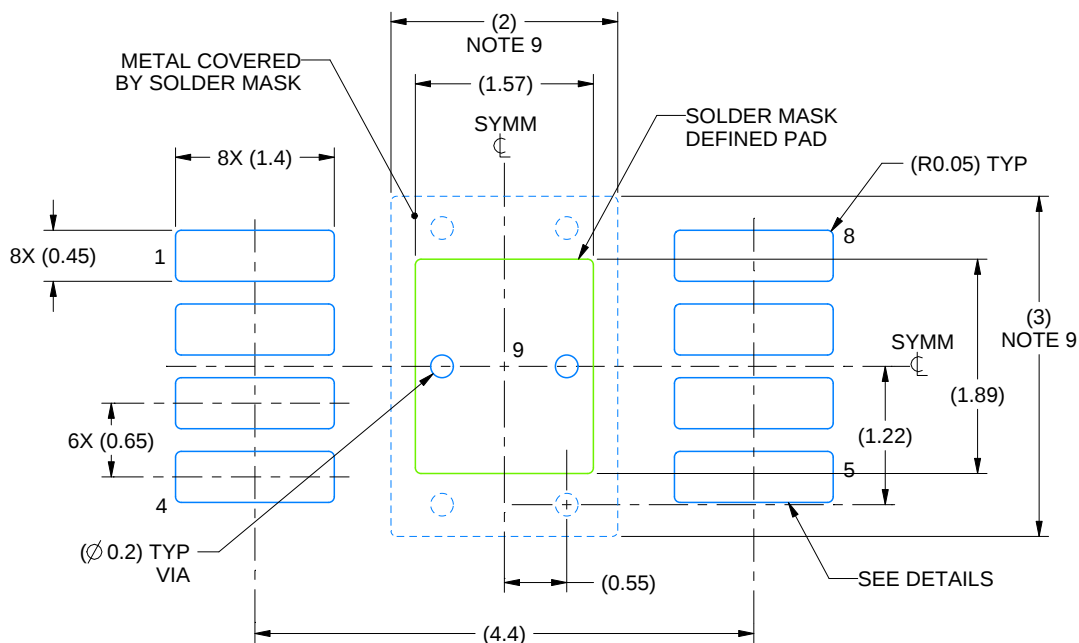

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

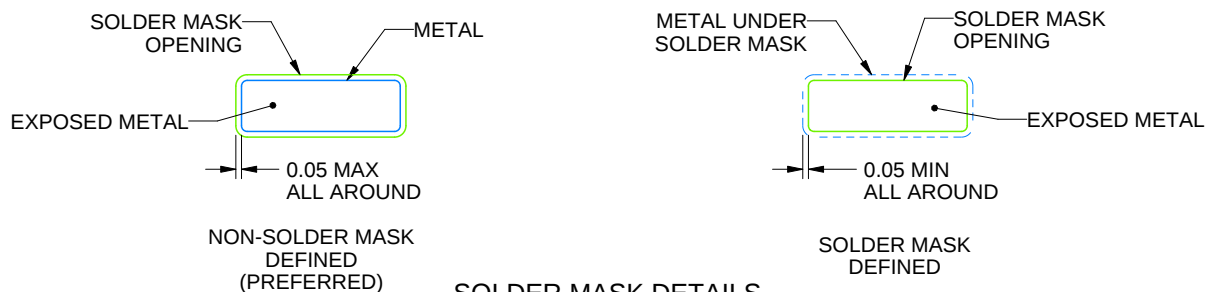

## SOLDER MASK DETAILS

4225481/A 11/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

# EXAMPLE STENCIL DESIGN

DGN0008D

PowerPAD™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

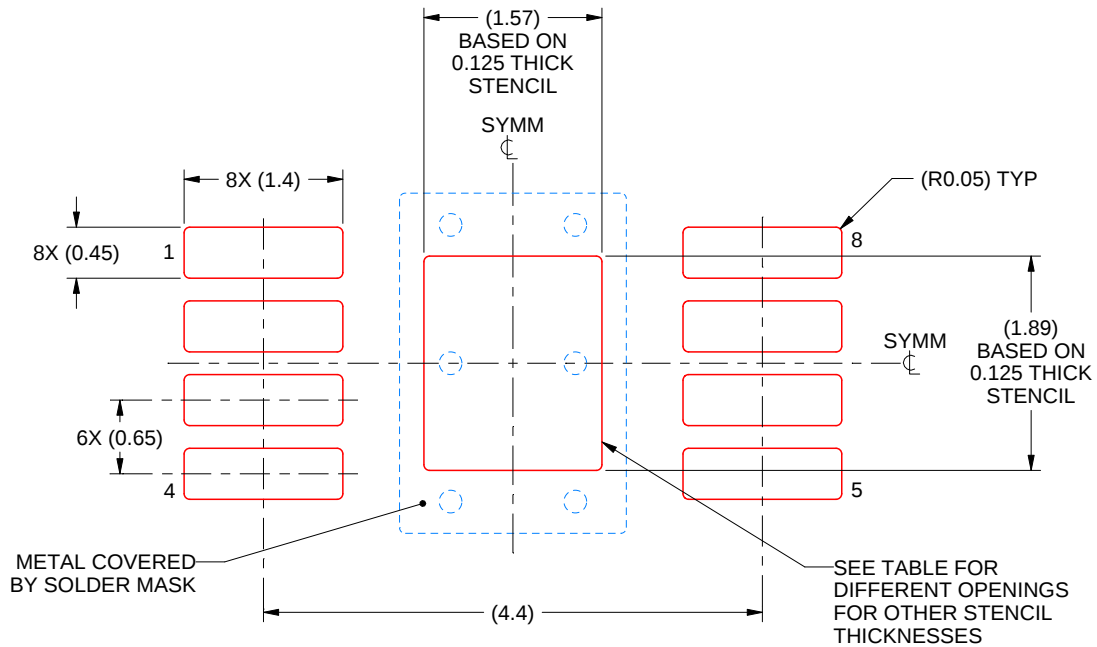



**SOLDER PASTE EXAMPLE**  
EXPOSED PAD 9:  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE: 15X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 1.76 X 2.11            |
| 0.125             | 1.57 X 1.89 (SHOWN)    |
| 0.15              | 1.43 X 1.73            |
| 0.175             | 1.33 X 1.60            |

4225481/A 11/2019

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

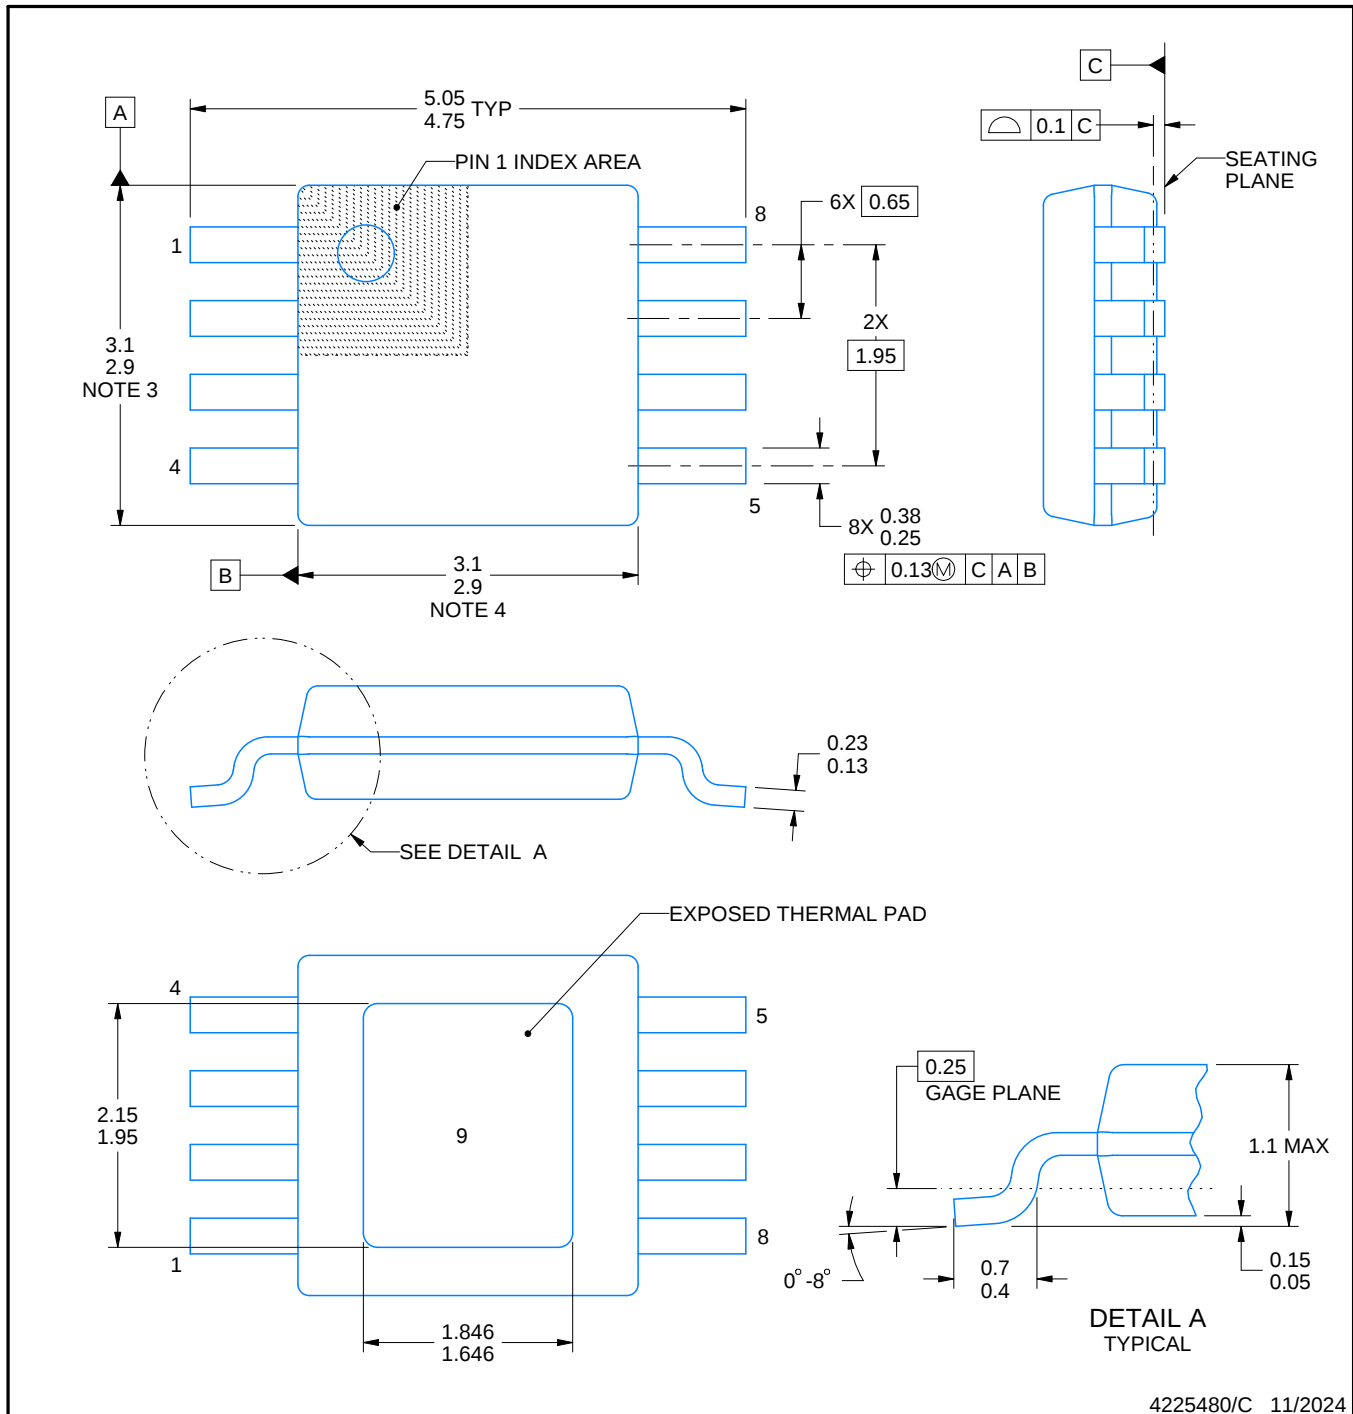

4225480/C 11/2024

## NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT


DGN0008G

PowerPAD™ HVSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

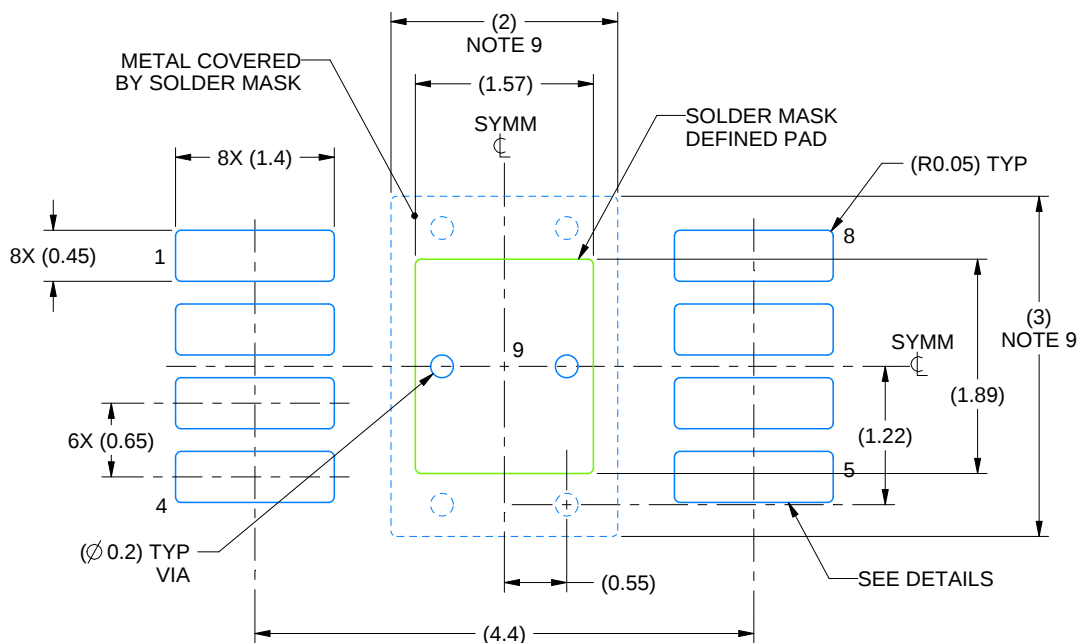

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

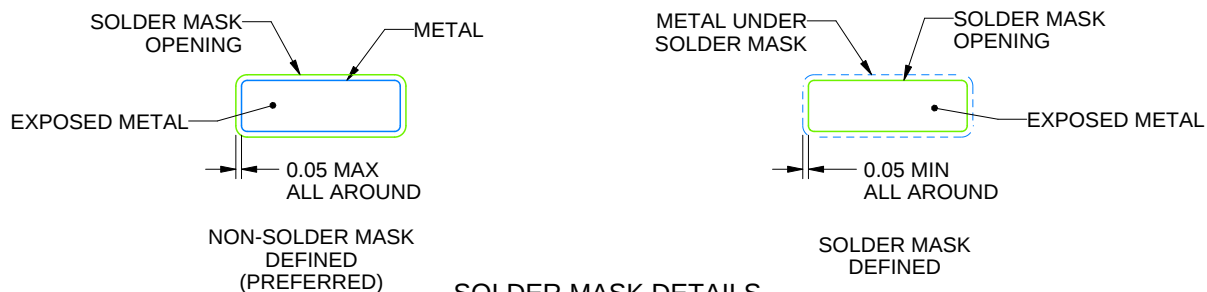

SOLDER MASK DETAILS

4225480/C 11/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

# EXAMPLE STENCIL DESIGN

DGN0008G

PowerPAD™ HVSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

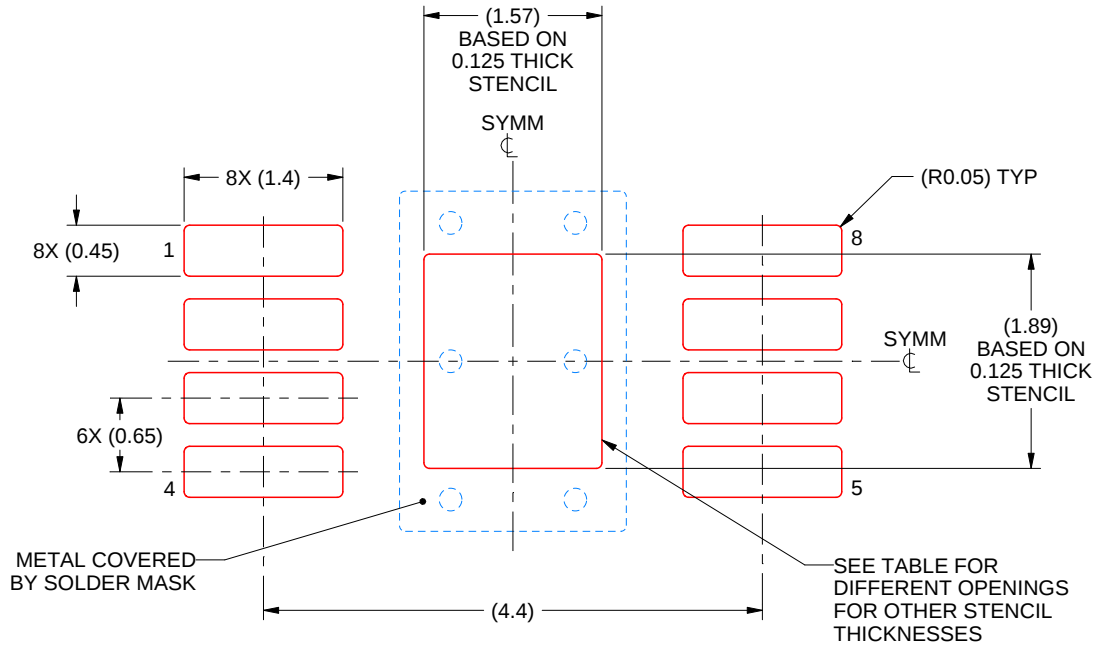

**SOLDER PASTE EXAMPLE**  
EXPOSED PAD 9:  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE: 15X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 1.76 X 2.11            |
| 0.125             | 1.57 X 1.89 (SHOWN)    |
| 0.15              | 1.43 X 1.73            |
| 0.175             | 1.33 X 1.60            |

4225480/C 11/2024

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.



## PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

**D0008A**

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated