



## LM431 Adjustable Precision Zener Shunt Regulator

### 1 Features

- Average Temperature Coefficient 50 ppm/°C
- Temperature Compensated for Operation Over the Full Temperature Range
- Programmable Output Voltage
- Fast Turnon Response
- Low-Output Noise
- Low-Dynamic Output Impedance
- Available in Space-Saving SOIC-8, SOT-23, and TO-92 Packages

### 2 Applications

- Adjustable Voltage or Current Linear and Switching Power Supplies
- Voltage Monitoring
- Current Source and Sink Circuits
- Circuits Requiring Precision References
- Zener Diode Replacements

### 3 Description

The LM431 is a 3-terminal adjustable shunt regulator with ensured temperature stability over the entire temperature range of operation. The output voltage may be set at any level greater than 2.5 V ( $V_{REF}$ ) up to 36 V merely by selecting two external resistors that act as a voltage divided network. Due to the sharp turnon characteristics this device is an excellent replacement for many Zener diode applications.


The LM431 is available in space-saving SOIC-8, SOT-23, and TO-92 packages.

#### Device Information<sup>(1)</sup>


| PART NUMBER | PACKAGE    | BODY SIZE (NOM)   |
|-------------|------------|-------------------|
| LM431       | SOIC (8)   | 4.90 mm × 3.91 mm |
|             | SOT-23 (3) | 2.92 mm × 1.30 mm |
|             | TO-92 (3)  | 4.30 mm × 4.30 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

#### LM431 Symbol



#### Functional Block Diagram

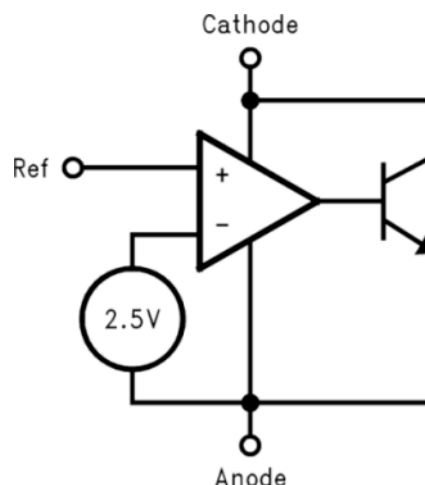

## Table of Contents

|                                                  |           |                                                                  |           |
|--------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b>  | 8.3 Feature Description.....                                     | <b>10</b> |
| <b>2 Applications</b> .....                      | <b>1</b>  | 8.4 Device Functional Modes.....                                 | <b>11</b> |
| <b>3 Description</b> .....                       | <b>1</b>  | <b>9 Application and Implementation</b> .....                    | <b>12</b> |
| <b>4 Revision History</b> .....                  | <b>2</b>  | 9.1 Application Information.....                                 | <b>12</b> |
| <b>5 Pin Configuration and Functions</b> .....   | <b>3</b>  | 9.2 Typical Applications .....                                   | <b>13</b> |
| <b>6 Specifications</b> .....                    | <b>4</b>  | <b>10 Power Supply Recommendations</b> .....                     | <b>19</b> |
| 6.1 Absolute Maximum Ratings .....               | <b>4</b>  | <b>11 Layout</b> .....                                           | <b>19</b> |
| 6.2 ESD Ratings.....                             | <b>4</b>  | 11.1 Layout Guidelines .....                                     | <b>19</b> |
| 6.3 Recommended Operating Conditions.....        | <b>4</b>  | 11.2 Layout Example .....                                        | <b>19</b> |
| 6.4 Thermal Information .....                    | <b>4</b>  | <b>12 Device and Documentation Support</b> .....                 | <b>20</b> |
| 6.5 Electrical Characteristics.....              | <b>5</b>  | 12.1 Community Resources.....                                    | <b>20</b> |
| 6.6 Typical Characteristics .....                | <b>7</b>  | 12.2 Trademarks .....                                            | <b>20</b> |
| <b>7 Parameter Measurement Information</b> ..... | <b>7</b>  | 12.3 Electrostatic Discharge Caution.....                        | <b>20</b> |
| <b>8 Detailed Description</b> .....              | <b>10</b> | 12.4 Glossary .....                                              | <b>20</b> |
| 8.1 Overview .....                               | <b>10</b> | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>20</b> |
| 8.2 Functional Block Diagram .....               | <b>10</b> |                                                                  |           |


## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



| Changes from Revision G (March 2013) to Revision H                                                                                                                                                                                                                                                                                                                                                  | Page     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| <ul style="list-style-type: none"> <li>Added <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i>, <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section .....</li> </ul> | <b>1</b> |

| Changes from Revision F (April 2013) to Revision G                                                         | Page      |
|------------------------------------------------------------------------------------------------------------|-----------|
| <ul style="list-style-type: none"> <li>Changed layout of National Data Sheet to TI format .....</li> </ul> | <b>18</b> |

## 5 Pin Configuration and Functions

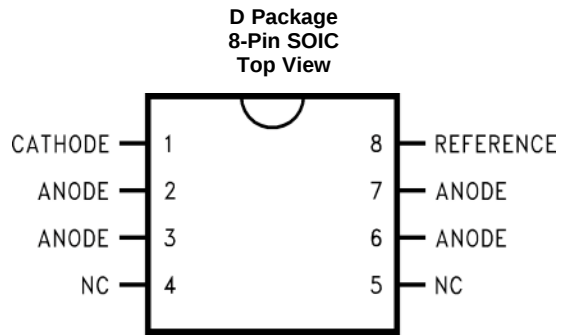

Note: NC = Not internally connected.

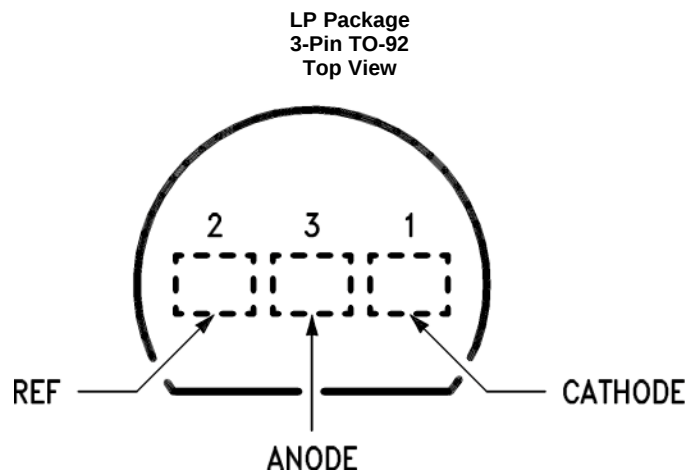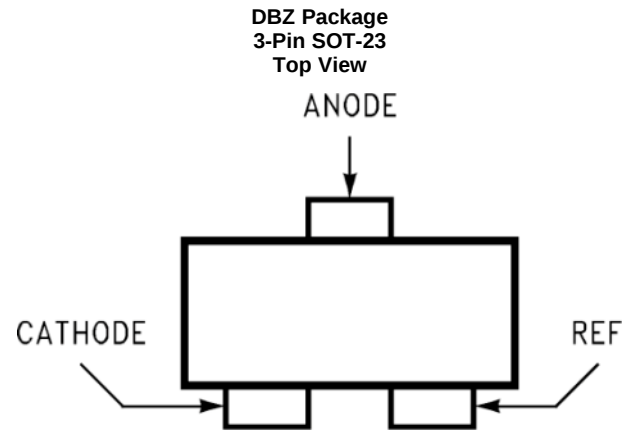

### Pin Functions

| NAME      | PIN        |        |       | I/O | DESCRIPTION                                 |
|-----------|------------|--------|-------|-----|---------------------------------------------|
|           | SOIC       | SOT-23 | TO-92 |     |                                             |
| Anode     | 2, 3, 6, 7 | 3      | 3     | O   | Anode pin, normally grounded                |
| Cathode   | 1          | 1      | 1     | I/O | Shunt current/output voltage                |
| NC        | 4, 5       | —      | —     | —   | No connect                                  |
| Reference | 8          | 2      | 2     | I   | Reference pin for adjustable output voltage |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)(2)</sup>

|                                              |                      | MIN  | MAX | UNIT |
|----------------------------------------------|----------------------|------|-----|------|
| Cathode voltage                              |                      | 37   |     | V    |
| Reference voltage                            |                      | –0.5 |     | V    |
| Continuous cathode current                   |                      | –10  | 150 | mA   |
| Reference input current                      |                      | 10   |     | mA   |
| Internal power dissipation <sup>(3)(4)</sup> | TO-92 package        | 0.78 |     | W    |
|                                              | SOIC package         | 0.81 |     | W    |
|                                              | SOT-23 package       | 0.28 |     | W    |
| Operating temperature                        | Industrial (LM431xI) | –40  | 85  | °C   |
|                                              | Commercial (LM431xC) | 0    | 70  | °C   |
| Storage temperature                          |                      | –65  | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- (3)  $T_{J\text{ Max}} = 150^{\circ}\text{C}$ .
- (4) Ratings apply to ambient temperature at  $25^{\circ}\text{C}$ . Above this temperature, derate the TO-92 at  $6.2\text{ mW}/^{\circ}\text{C}$ , the SOIC at  $6.5\text{ mW}/^{\circ}\text{C}$ , the SOT-23 at  $2.2\text{ mW}/^{\circ}\text{C}$ .

### 6.2 ESD Ratings

|                  |                         |                                                                   | VALUE | UNIT |
|------------------|-------------------------|-------------------------------------------------------------------|-------|------|
| $V_{\text{ESD}}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup> | ±2500 | V    |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                 |  | MIN              | MAX | UNIT |
|-----------------|--|------------------|-----|------|
| Cathode voltage |  | $V_{\text{REF}}$ | 37  | V    |
| Cathode current |  | 1                | 100 | mA   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | LM431    |              |            | UNIT |
|-------------------------------|----------------------------------------------|----------|--------------|------------|------|
|                               |                                              | D (SOIC) | DBZ (SOT-23) | LP (TO-92) |      |
|                               |                                              | 8 PINS   | 3 PINS       | 3 PINS     |      |
| $R_{\theta\text{JA}}$         | Junction-to-ambient thermal resistance       | 126.9    | 267.7        | 162.4      | °C/W |
| $R_{\theta\text{JC(top)}}$    | Junction-to-case (top) thermal resistance    | 72.2     | 138.3        | 85.8       | °C/W |
| $R_{\theta\text{JB}}$         | Junction-to-board thermal resistance         | 67.5     | 61           | —          | °C/W |
| $\Psi_{\text{JT}}$            | Junction-to-top characterization parameter   | 21.1     | 21.5         | 29.4       | °C/W |
| $\Psi_{\text{JB}}$            | Junction-to-board characterization parameter | 67       | 60.1         | 141.5      | °C/W |
| $R_{\theta\text{JC(bot)}}$    | Junction-to-case (bottom) thermal resistance | —        | —            | —          | °C/W |


- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 6.5 Electrical Characteristics

T<sub>A</sub> = 25°C unless otherwise specified

| PARAMETER                              |                                                                              | TEST CONDITIONS                                                                                                |                                              | MIN   | TYP   | MAX  | UNIT |
|----------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------|-------|-------|------|------|
| V <sub>REF</sub>                       | Reference voltage                                                            | V <sub>Z</sub> = V <sub>REF</sub> , I <sub>I</sub> = 10 mA<br>LM431A (Figure 6 )                               |                                              | 2.44  | 2.495 | 2.55 | V    |
|                                        |                                                                              | V <sub>Z</sub> = V <sub>REF</sub> , I <sub>I</sub> = 10 mA<br>LM431B (Figure 6 )                               |                                              | 2.47  | 2.495 | 2.52 |      |
|                                        |                                                                              | V <sub>Z</sub> = V <sub>REF</sub> , I <sub>I</sub> = 10 mA<br>LM431C (Figure 6 )                               |                                              | 2.485 | 2.5   | 2.51 |      |
| V <sub>DEV</sub>                       | Deviation of reference input voltage<br>overtemperature <sup>(1)</sup>       | V <sub>Z</sub> = V <sub>REF</sub> , I <sub>I</sub> = 10 mA,<br>T <sub>A</sub> = full range (Figure 6 )         |                                              |       | 8     | 17   | mV   |
| ΔV <sub>REF</sub> /<br>ΔV <sub>Z</sub> | Ratio of the change in reference voltage to the<br>change in cathode voltage | I <sub>Z</sub> = 10 mA<br>(Figure 7 )                                                                          | V <sub>Z</sub> from V <sub>REF</sub> to 10 V |       | -1.4  | -2.7 | mV/V |
|                                        |                                                                              |                                                                                                                | V <sub>Z</sub> from 10 V to 36 V             |       | -1    | -2   |      |
| I <sub>REF</sub>                       | Reference input current                                                      | R <sub>1</sub> = 10 kΩ, R <sub>2</sub> = ∞, I <sub>I</sub> = 10 mA<br>(Figure 7 )                              |                                              |       | 2     | 4    | μA   |
| ∞I <sub>REF</sub>                      | Deviation of reference input current<br>overtemperature                      | R <sub>1</sub> = 10 kΩ, R <sub>2</sub> = ∞, I <sub>I</sub> = 10 mA,<br>T <sub>A</sub> = full range (Figure 7 ) |                                              |       | 0.4   | 1.2  | μA   |
| I <sub>Z(MIN)</sub>                    | Minimum cathode current for regulation                                       | V <sub>Z</sub> = V <sub>REF</sub> (Figure 6 )                                                                  |                                              |       | 0.4   | 1    | mA   |
| I <sub>Z(OFF)</sub>                    | OFF-state current                                                            | V <sub>Z</sub> = 36 V, V <sub>REF</sub> = 0 V (Figure 8)                                                       |                                              |       | 0.3   | 1    | μA   |

- (1) Deviation of reference input voltage, V<sub>DEV</sub>, is defined as the maximum variation of the reference input voltage over the full temperature range.

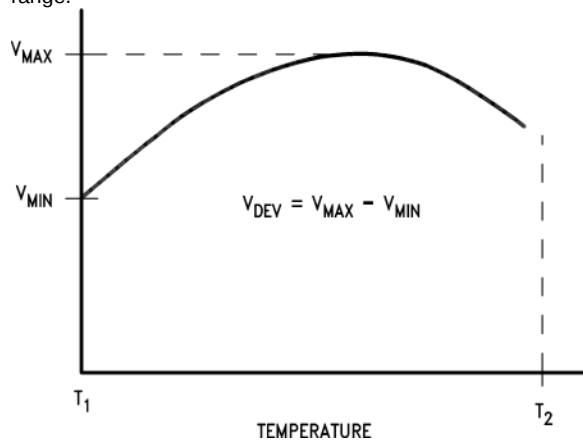

The average temperature coefficient of the reference input voltage, ∞V<sub>REF</sub>, is defined as:

$$\infty V_{REF} \frac{\text{ppm}}{^{\circ}\text{C}} = \frac{\pm \left[ \frac{V_{\text{Max}} - V_{\text{Min}}}{V_{\text{REF}} (\text{at } 25^{\circ}\text{C})} \right] 10^6}{T_2 - T_1} = \frac{\pm \left[ \frac{V_{\text{DEV}}}{V_{\text{REF}} (\text{at } 25^{\circ}\text{C})} \right] 10^6}{T_2 - T_1}$$

Where:

T<sub>2</sub> – T<sub>1</sub> = full temperature change (0–70°C).

V<sub>REF</sub> can be positive or negative depending on whether the slope is positive or negative.

Example: V<sub>DEV</sub> = 8 mV, V<sub>REF</sub> = 2495 mV, T<sub>2</sub> – T<sub>1</sub> = 70°C, slope is positive.

$$\infty V_{REF} = \frac{\left[ \frac{8.0 \text{ mV}}{2495 \text{ mV}} \right] 10^6}{70^{\circ}\text{C}} = +46 \text{ ppm}/^{\circ}\text{C}$$

## Electrical Characteristics (continued)

T<sub>A</sub> = 25°C unless otherwise specified

| PARAMETER                                              | TEST CONDITIONS                                                                   | MIN | TYP | MAX  | UNIT |
|--------------------------------------------------------|-----------------------------------------------------------------------------------|-----|-----|------|------|
| r <sub>Z</sub> Dynamic output impedance <sup>(2)</sup> | V <sub>Z</sub> = V <sub>REF</sub> , LM431A,<br>Frequency = 0 Hz (Figure 6)        |     |     | 0.75 | Ω    |
|                                                        | V <sub>Z</sub> = V <sub>REF</sub> , LM431B, LM431C<br>Frequency = 0 Hz (Figure 6) |     |     | 0.5  |      |


(2) The dynamic output impedance, r<sub>Z</sub>, is defined as:

$$r_Z = \frac{\Delta V_Z}{\Delta I_Z}$$

When the device is programmed with two external resistors, R1 and R2, (see Figure 7), the dynamic output impedance of the overall circuit, r<sub>Z</sub>, is defined as:

$$r_Z = \frac{\Delta V_Z}{\Delta I_Z} \cong \left[ r_Z \left( 1 + \frac{R1}{R2} \right) \right]$$

## 6.6 Typical Characteristics

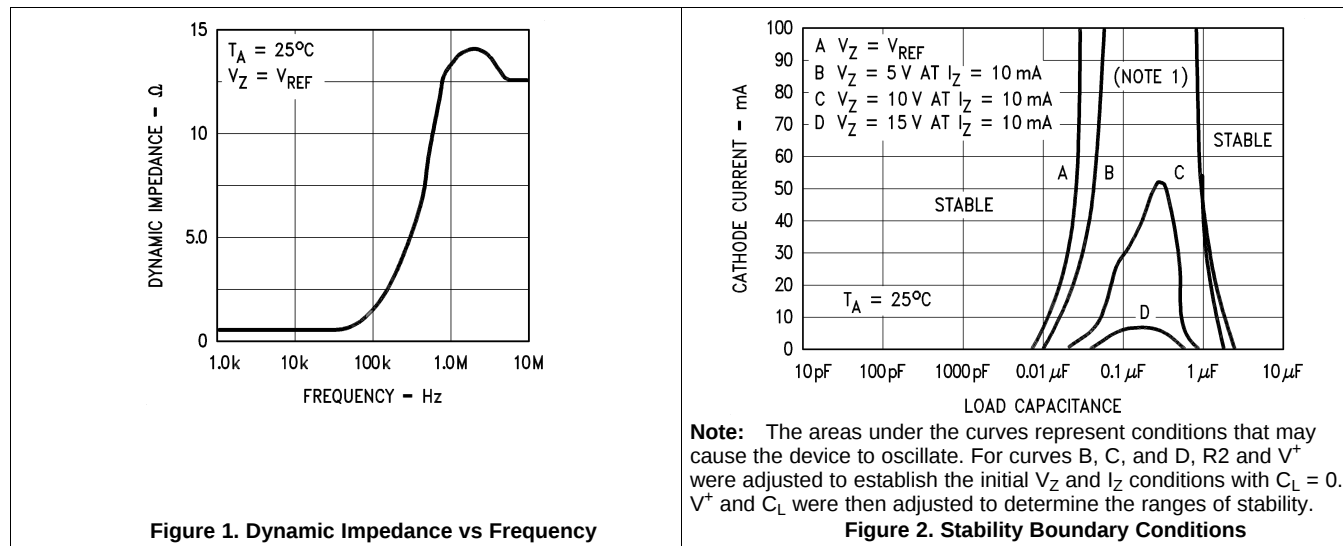

## 7 Parameter Measurement Information

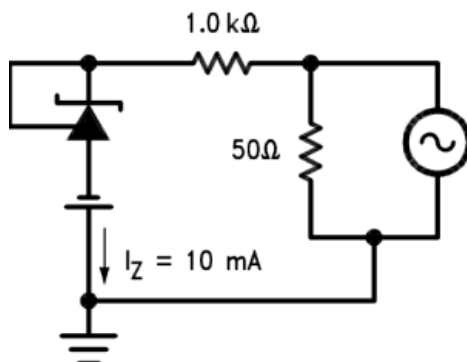


Figure 3. Test Circuit for Dynamic Impedance vs Frequency Curve

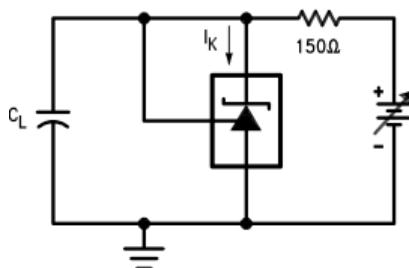
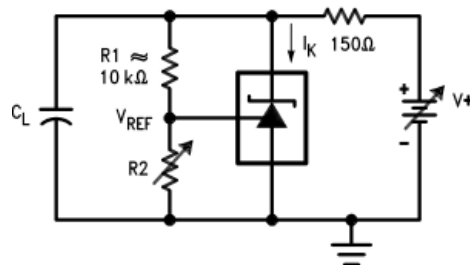
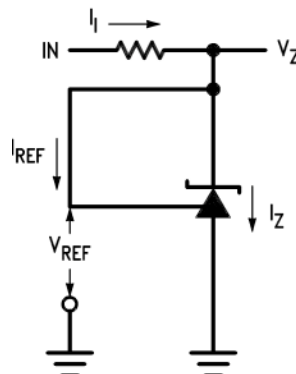
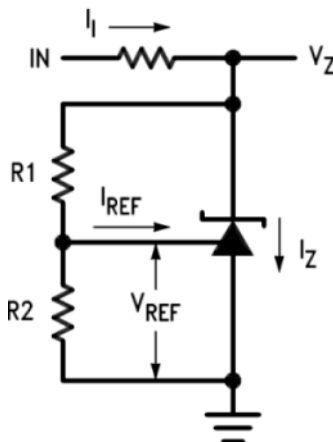



Figure 4. Test Circuit for Curve A Above

**Parameter Measurement Information (continued)**

**Figure 5. Test Circuit for Curves B, C and D Above**

**Figure 6. Test Circuit for  $V_Z = V_{REF}$** 


**Note:**  $V_Z = V_{REF} (1 + R1/R2) + I_{REF} \times R1$

**Figure 7. Test Circuit for  $V_Z > V_{REF}$**

### Parameter Measurement Information (continued)




**Figure 8. Test Circuit for OFF-State Current**

## 8 Detailed Description


### 8.1 Overview

The LM431 is an adjustable precision shunt voltage regulator with ensured temperature stability over the entire temperature range. The part has three different packages available to meet small footprint requirements, and is available in three different tolerance grades.

### 8.2 Functional Block Diagram

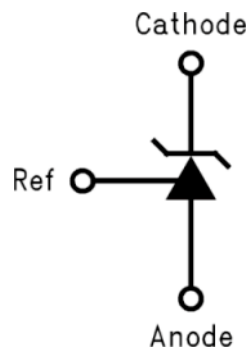


**Figure 9. LM431 Symbol**

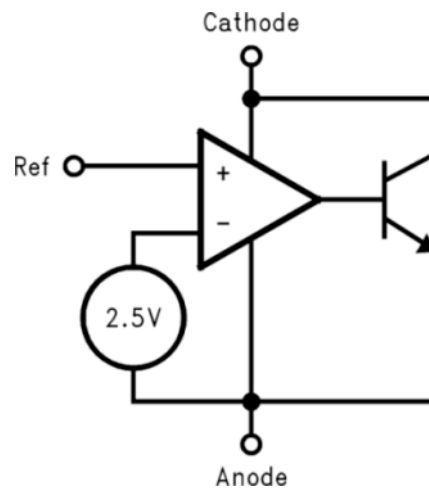

**Figure 10. LM431 Block Diagram**

### 8.3 Feature Description

The LM431 is a precision Zener diode. The part requires a small quiescent current for regulation, and regulates the output voltage by shunting more or less current to ground, depending on input voltage and load. The only external component requirement is a resistor between the cathode and the input voltage to set the input current. An external capacitor can be used on the input or output, but is not required.

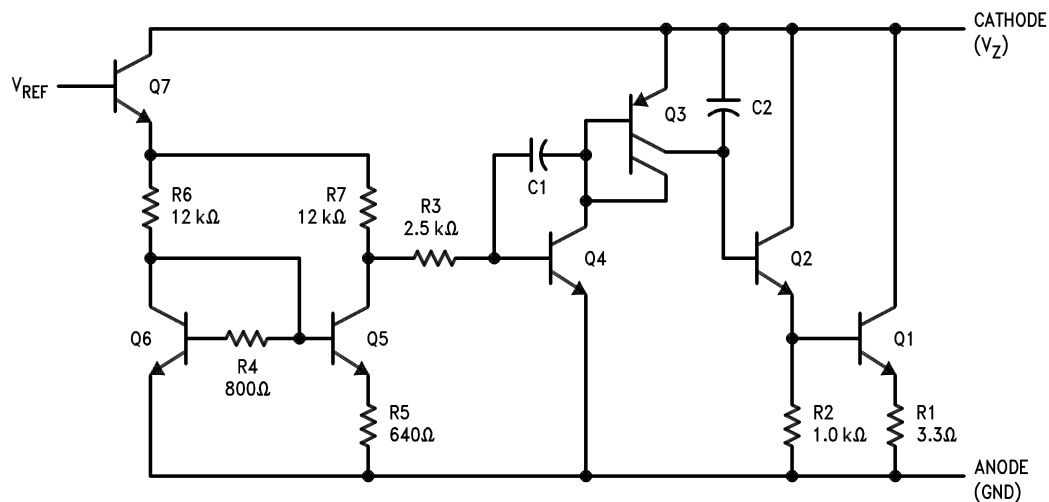

## 9 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers must validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The LM431 is an adjustable precision shunt voltage regulator with ensured temperature stability over the entire temperature range. For space critical applications, the LM431 is available in space saving SOIC-8, SOT-23 and TO-92 packages. The minimum operating current is 1 mA while the maximum operating current is 100 mA.

The typical thermal hysteresis specification is defined as the change in 25°C voltage measured after thermal cycling. The device is thermal cycled to temperature 0°C and then measured at 25°C. Next the device is thermal cycled to temperature 70°C and again measured at 25°C. The resulting VOUT delta shift between the 25°C measurements is thermal hysteresis. Thermal hysteresis is common in precision references and is induced by thermal-mechanical package stress. Changes in environmental storage temperature, operating temperature and board mounting temperature are all factors that can contribute to thermal hysteresis.

In a conventional shunt regulator application ([Figure 12](#)), an external series resistor ( $R_S$ ) is connected between the supply voltage and the LM431 cathode pin.  $R_S$  determines the current that flows through the load ( $I_{LOAD}$ ) and the LM431 ( $I_Z$ ). Since load current and supply voltage may vary,  $R_S$  must be small enough to supply at least the minimum acceptable  $I_Z$  to the LM431 even when the supply voltage is at its minimum and the load current is at its maximum value. When the supply voltage is at its maximum and  $I_{LOAD}$  is at its minimum,  $R_S$  must be large enough so that the current flowing through the LM431 is less than 100 mA.

$R_S$  must be selected based on the supply voltage, ( $V_+$ ), the desired load and operating current, ( $I_{LOAD}$  and  $I_Z$ ), and the output voltage, see [Equation 1](#).

$$R_S = \frac{V_+ - V_O}{I_{LOAD} + I_Z} \quad (1)$$

The LM431 output voltage can be adjusted to any value in the range of 2.5 V through 37 V. It is a function of the internal reference voltage ( $V_{REF}$ ) and the ratio of the external feedback resistors as shown in [Figure 12](#). The output voltage is found using [Equation 2](#).

$$V_O = V_{REF} * (1 + R_1/R_2)$$

where

- $V_O$  is the output voltage (also, cathode voltage,  $V_Z$ ). The actual value of the internal  $V_{REF}$  is a function of  $V_Z$ . (2)

The corrected  $V_{REF}$  is determined by [Equation 3](#):


$$V_{REF} = \Delta V_Z * (\Delta V_{REF}/\Delta V_Z) + V_Y$$

where

- $V_Y = 2.5$  V and  $\Delta V_Z = (V_Z - V_Y)$
- $\Delta V_{REF}/\Delta V_Z$  is found in the [Electrical Characteristics](#) and is typically  $-1.4$  mV/V for  $V_Z$  raging from  $V_{REF}$  to 10 V and  $-1$  mV/V for  $V_Z$  raging from 10 V to 36 V. (3)

## 9.2 Typical Applications

### 9.2.1 Shunt Regulator

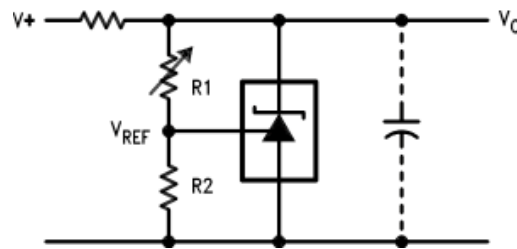

$$V_O \approx \left( 1 + \frac{R_1}{R_2} \right) V_{REF}$$

Figure 12. Shunt Regulator

#### 9.2.1.1 Design Requirements

Design a shunt regulator with the following requirements:

- $V_+ > V_O$
- $V_O = 5\text{ V}$

Select  $R_S$  (a resistor between  $V_+$  and  $V_O$ ) such that:  $1\text{ mA} < I_Z < 100\text{ mA}$

#### 9.2.1.2 Detailed Design Procedure

The resistor  $R_S$  must be selected such that current  $I_Z$  remains in the operational region of the part for the entire  $V_+$  range and load current range. The two extremes to consider are  $V_+$  at its minimum, and the load at its maximum, where  $R_S$  must be small enough for  $I_Z$  to remain above  $1\text{ mA}$ . The other extreme is  $V_+$  at its maximum, and the load at its minimum, where  $R_S$  must be large enough to maintain  $I_Z < 100\text{ mA}$ . If unsure, try using  $1\text{ mA} \leq I_R \leq 10\text{ mA}$  as a starting point; just remember the value of  $I_Z$  varies with input voltage and load.

Use Equation 4 and Equation 5 to set  $R_S$  between  $R_{S\_MIN}$  and  $R_{S\_MAX}$ .

$$R_{S\_MIN} = \frac{V_{+\_MAX} - V_O}{I_{LOAD\_MIN} + I_{Z\_MAX}} \quad (4)$$

$$R_{S\_MAX} = \frac{V_{+\_MIN} - V_O}{I_{LOAD\_MAX} + I_{Z\_MIN}} \quad (5)$$

Set feedback resistors  $R_1$  and  $R_2$  for a resistor divider based on Equation 2 and reproduced in Equation 6

$$V_O = V_{REF} * (1 + R_1/R_2) \quad (6)$$

So, for a 5-V output voltage,  $V_O$ , and  $V_{REF}$  of 2.5 V, simple calculation yields  $R_1/R_2 = 1$ . Based on this, select  $R_1 = 1\text{ k}\Omega$  and  $R_2 = 1\text{ k}\Omega$ .

## Typical Applications (continued)

### 9.2.1.3 Application Curves

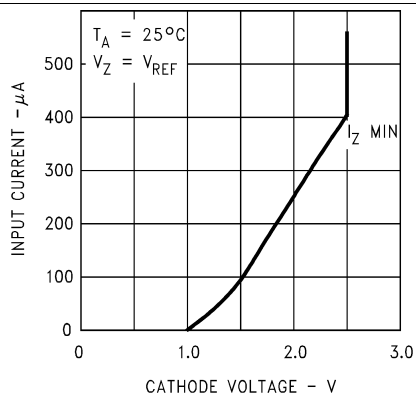


Figure 13. Input Current vs  $V_Z$

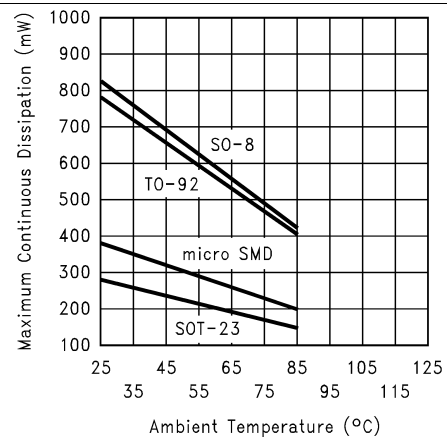


Figure 14. Thermal Information

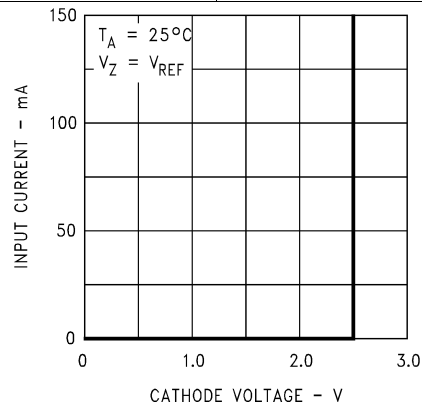


Figure 15. Input Current vs  $V_Z$

### 9.2.2 Other Applications

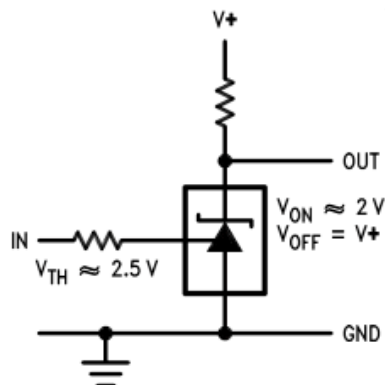


Figure 16. Single Supply Comparator With Temperature Compensated Threshold

## Typical Applications (continued)

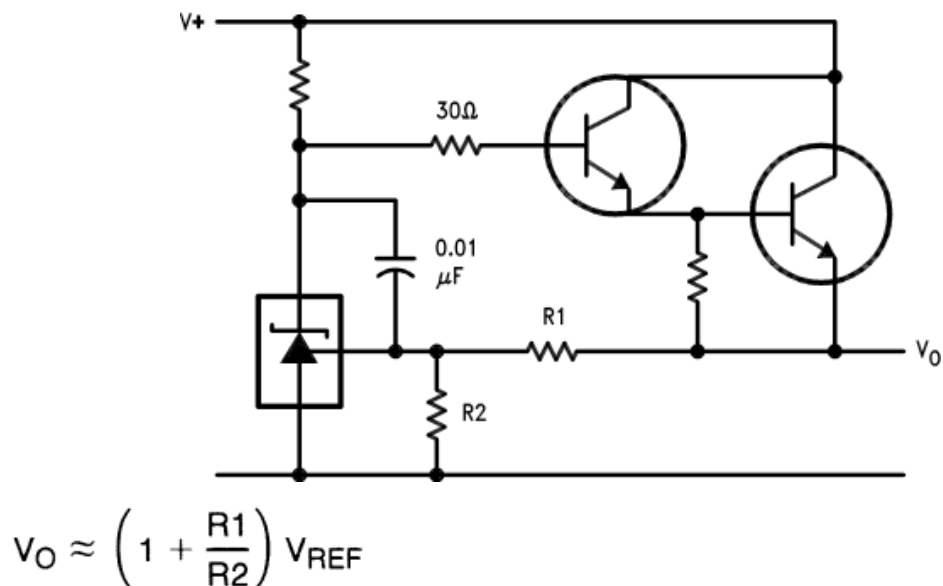


Figure 17. Series Regulator

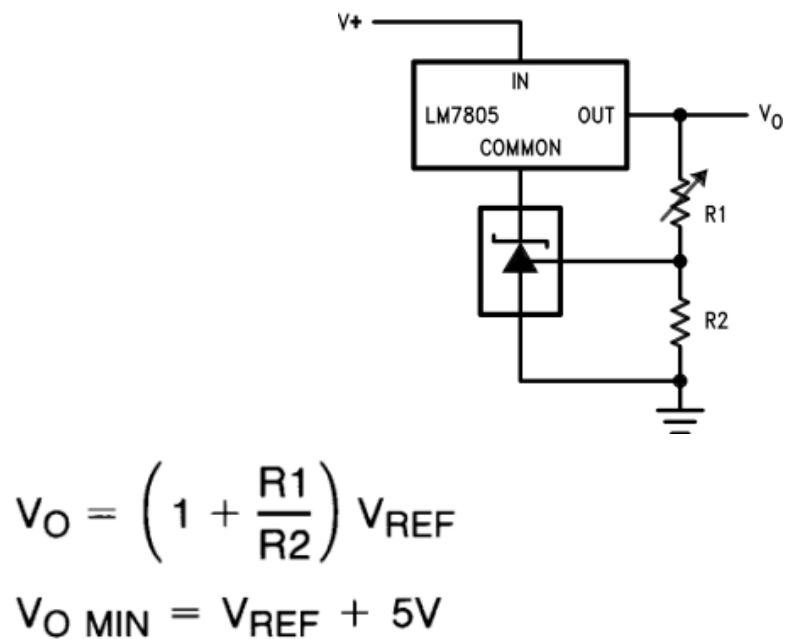
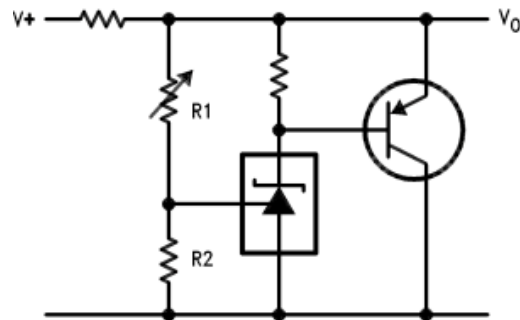
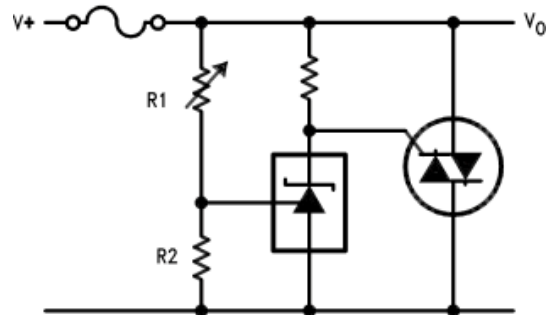


Figure 18. Output Control of a Three Terminal Fixed Regulator

**Typical Applications (continued)**


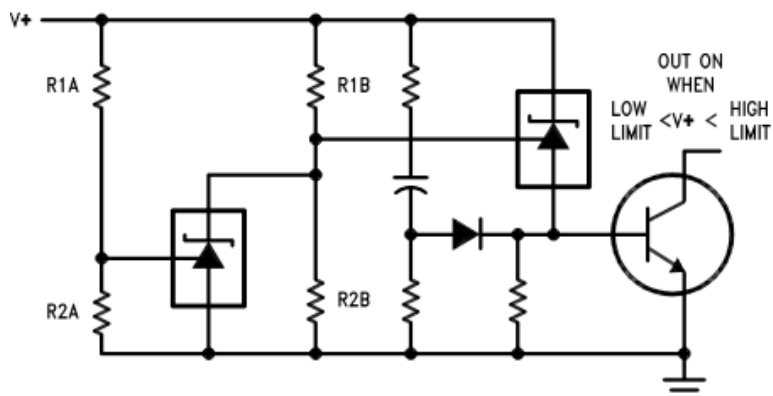
$$V_O \approx \left( 1 + \frac{R1}{R2} \right) V_{REF}$$

**Figure 19. Higher Current Shunt Regulator**


$$V_{LIMIT} \approx \left( 1 + \frac{R1}{R2} \right) V_{REF}$$

**Figure 20. Crow Bar**


## Typical Applications (continued)



$$\text{LOW LIMIT} \approx V_{\text{REF}} \left( 1 + \frac{R1B}{R2B} \right) + V_{\text{BE}}$$

$$\text{HIGH LIMIT} \approx V_{\text{REF}} \left( 1 + \frac{R1A}{R2A} \right)$$

Figure 21. Over Voltage and Under Voltage Protection Circuit

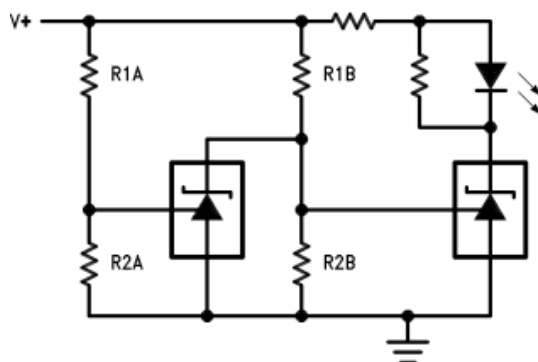


$$\text{LOW LIMIT} \approx V_{\text{REF}} \left( 1 + \frac{R1B}{R2B} \right)$$

$$\text{HIGH LIMIT} \approx V_{\text{REF}} \left( 1 + \frac{R1A}{R2A} \right)$$

LED ON WHEN  
LOW LIMIT < V+ < HIGH LIMIT


Figure 22. Voltage Monitor

## Typical Applications (continued)

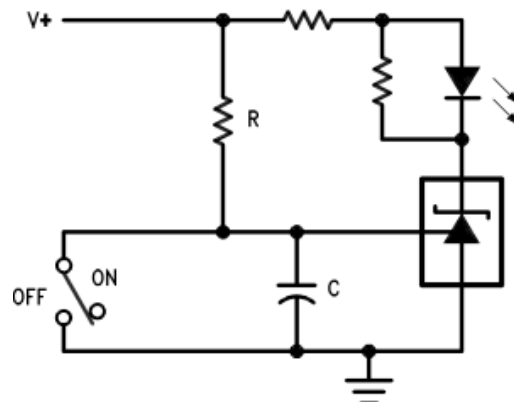

$$\text{DELAY} = R \cdot C \cdot \ln \frac{V^+}{(V^+) - V_{\text{REF}}}$$

Figure 23. Delay Timer

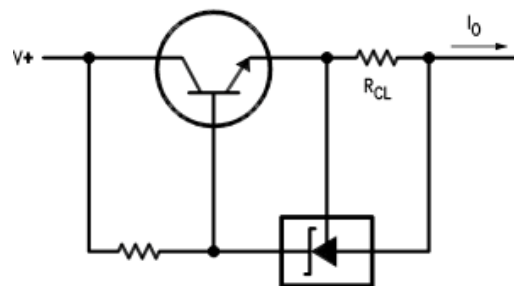

$$I_O = \frac{V_{\text{REF}}}{R_{\text{CL}}}$$

Figure 24. Current Limiter or Current Source

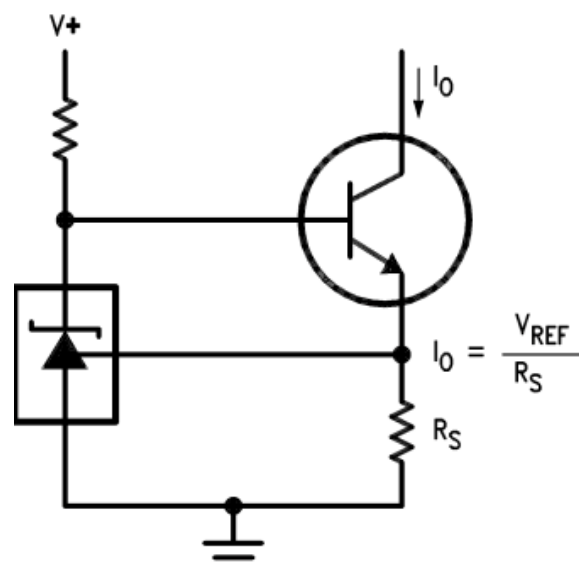


Figure 25. Constant Current Sink

## 10 Power Supply Recommendations


While a bypass capacitor is not required on the input voltage line, TI recommends reducing noise on the input which could affect the output. TI recommends a 0.1- $\mu$ F ceramic capacitor or larger.

## 11 Layout

### 11.1 Layout Guidelines

Place external components as close to the device as possible. Place  $R_S$  close to the cathode, as well as the input bypass capacitor, if used. Keep feedback resistor close the device whenever possible.

### 11.2 Layout Example

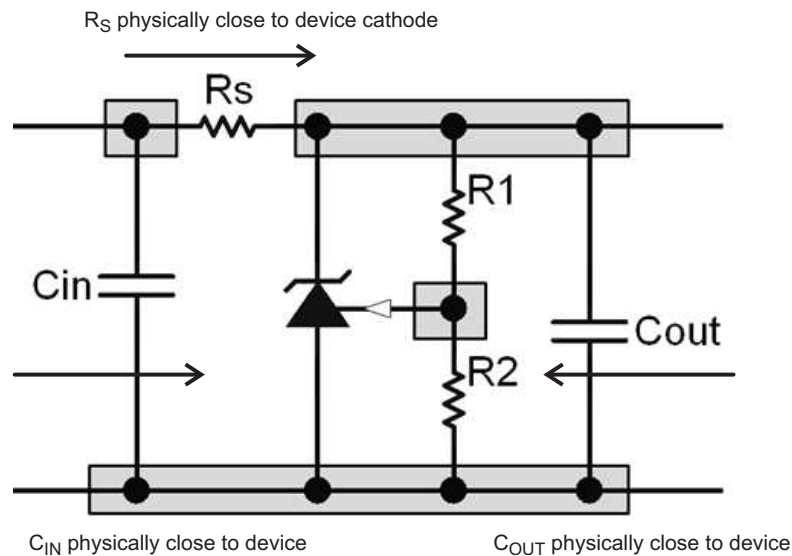

**Figure 26. LM431 Layout Recommendation**

## 12 Device and Documentation Support

### 12.1 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.2 Trademarks

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM431ACM/NOPB</a>   | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | LM431<br>ACM        |
| LM431ACM/NOPB.B                 | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | LM431<br>ACM        |
| <a href="#">LM431ACM3/NOPB</a>  | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1F                 |
| LM431ACM3/NOPB.B                | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1F                 |
| <a href="#">LM431ACM3X/NOPB</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1F                 |
| LM431ACM3X/NOPB.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1F                 |
| <a href="#">LM431ACMX/NOPB</a>  | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | LM431<br>ACM        |
| LM431ACMX/NOPB.B                | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | LM431<br>ACM        |
| <a href="#">LM431ACZ/LFT3</a>   | Active        | Production           | TO-92 (LP)   3   | 2000   LARGE T&R      | Yes         | SN                                   | N/A for Pkg Type                  | -            | LM431<br>ACZ        |
| LM431ACZ/LFT3.B                 | Active        | Production           | TO-92 (LP)   3   | 2000   LARGE T&R      | Yes         | SN                                   | N/A for Pkg Type                  | -40 to 85    | LM431<br>ACZ        |
| <a href="#">LM431ACZ/LFT4</a>   | Active        | Production           | TO-92 (LP)   3   | 2000   LARGE T&R      | Yes         | SN                                   | N/A for Pkg Type                  | -            | LM431<br>ACZ        |
| LM431ACZ/LFT4.B                 | Active        | Production           | TO-92 (LP)   3   | 2000   LARGE T&R      | Yes         | SN                                   | N/A for Pkg Type                  | -40 to 85    | LM431<br>ACZ        |
| <a href="#">LM431ACZ/NOPB</a>   | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | 0 to 70      | LM431<br>ACZ        |
| LM431ACZ/NOPB.B                 | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | 0 to 70      | LM431<br>ACZ        |
| <a href="#">LM431AIM/NOPB</a>   | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | LM431<br>AIM        |
| LM431AIM/NOPB.B                 | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | LM431<br>AIM        |
| <a href="#">LM431AIM3/NOPB</a>  | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1E                 |
| LM431AIM3/NOPB.B                | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1E                 |
| <a href="#">LM431AIM3X/NOPB</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1E                 |
| LM431AIM3X/NOPB.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1E                 |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM431AIMX/NOPB</a>  | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | LM431<br>AIM        |
| LM431AIMX/NOPB.B                | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | LM431<br>AIM        |
| <a href="#">LM431AIZ/LFT1</a>   | Active        | Production           | TO-92 (LP)   3   | 2000   LARGE T&R      | Yes         | SN                                   | N/A for Pkg Type                  | -            | LM431<br>AIZ        |
| LM431AIZ/LFT1.B                 | Active        | Production           | TO-92 (LP)   3   | 2000   LARGE T&R      | Yes         | SN                                   | N/A for Pkg Type                  | -40 to 85    | LM431<br>AIZ        |
| <a href="#">LM431AIZ/NOPB</a>   | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | -40 to 85    | LM431<br>AIZ        |
| LM431AIZ/NOPB.B                 | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | -40 to 85    | LM431<br>AIZ        |
| <a href="#">LM431BCM/NOPB</a>   | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | 431<br>BCM          |
| LM431BCM/NOPB.B                 | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | 431<br>BCM          |
| <a href="#">LM431BCM3/NOPB</a>  | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1D                 |
| LM431BCM3/NOPB.B                | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1D                 |
| <a href="#">LM431BCM3X/NOPB</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1D                 |
| LM431BCM3X/NOPB.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1D                 |
| <a href="#">LM431BCMx/NOPB</a>  | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | 431<br>BCM          |
| LM431BCMx/NOPB.B                | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | 431<br>BCM          |
| <a href="#">LM431BCZ/NOPB</a>   | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | 0 to 70      | LM431<br>BCZ        |
| LM431BCZ/NOPB.B                 | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | 0 to 70      | LM431<br>BCZ        |
| <a href="#">LM431BIM/NOPB</a>   | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | 431<br>BIM          |
| LM431BIM/NOPB.B                 | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | 431<br>BIM          |
| <a href="#">LM431BIM3/NOPB</a>  | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1C                 |
| LM431BIM3/NOPB.B                | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1C                 |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LM431BIM3X/NOPB</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1C                 |
| LM431BIM3X/NOPB.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1C                 |
| <a href="#">LM431BIMX/NOPB</a>  | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | 431<br>BIM          |
| LM431BIMX/NOPB.B                | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | 431<br>BIM          |
| <a href="#">LM431CCM/NOPB</a>   | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | 431<br>CCM          |
| LM431CCM/NOPB.B                 | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | 431<br>CCM          |
| <a href="#">LM431CCM3/NOPB</a>  | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1B                 |
| LM431CCM3/NOPB.B                | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1B                 |
| <a href="#">LM431CCM3X/NOPB</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1B                 |
| LM431CCM3X/NOPB.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | 0 to 70      | N1B                 |
| <a href="#">LM431CCZ/NOPB</a>   | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | 0 to 70      | LM431<br>CCZ        |
| LM431CCZ/NOPB.B                 | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | 0 to 70      | LM431<br>CCZ        |
| <a href="#">LM431CIM/NOPB</a>   | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | 431<br>CIM          |
| LM431CIM/NOPB.B                 | Active        | Production           | SOIC (D)   8     | 95   TUBE             | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | 431<br>CIM          |
| <a href="#">LM431CIM3/NOPB</a>  | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1A                 |
| LM431CIM3/NOPB.B                | Active        | Production           | SOT-23 (DBZ)   3 | 1000   SMALL T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1A                 |
| <a href="#">LM431CIM3X/NOPB</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1A                 |
| LM431CIM3X/NOPB.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | N1A                 |
| <a href="#">LM431CIZ/NOPB</a>   | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | -40 to 85    | LM431<br>CIZ        |
| LM431CIZ/NOPB.B                 | Active        | Production           | TO-92 (LP)   3   | 1800   BULK           | Yes         | Call TI                              | N/A for Pkg Type                  | -40 to 85    | LM431<br>CIZ        |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM431ACM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431ACM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431ACMX/NOPB  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.5     | 5.4     | 2.0     | 8.0     | 12.0   | Q1            |
| LM431AIM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431AIM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431AIMX/NOPB  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.5     | 5.4     | 2.0     | 8.0     | 12.0   | Q1            |
| LM431BCM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431BCM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431BCMX/NOPB  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.5     | 5.4     | 2.0     | 8.0     | 12.0   | Q1            |
| LM431BIM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431BIM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431BIMX/NOPB  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.5     | 5.4     | 2.0     | 8.0     | 12.0   | Q1            |
| LM431CCM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431CCM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431CIM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |
| LM431CIM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 8.4                | 3.3     | 2.9     | 1.22    | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM431ACM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 208.0       | 191.0      | 35.0        |
| LM431ACM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 208.0       | 191.0      | 35.0        |
| LM431ACMX/NOPB  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM431AIM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 208.0       | 191.0      | 35.0        |
| LM431AIM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 208.0       | 191.0      | 35.0        |
| LM431AIMX/NOPB  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM431BCM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 208.0       | 191.0      | 35.0        |
| LM431BCM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 208.0       | 191.0      | 35.0        |
| LM431BCM3X/NOPB | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM431BIM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 208.0       | 191.0      | 35.0        |
| LM431BIM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 208.0       | 191.0      | 35.0        |
| LM431BIMX/NOPB  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM431CCM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 208.0       | 191.0      | 35.0        |
| LM431CCM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 208.0       | 191.0      | 35.0        |
| LM431CIM3/NOPB  | SOT-23       | DBZ             | 3    | 1000 | 208.0       | 191.0      | 35.0        |
| LM431CIM3X/NOPB | SOT-23       | DBZ             | 3    | 3000 | 208.0       | 191.0      | 35.0        |

## TUBE




\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| LM431ACM/NOPB   | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431ACM/NOPB.B | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431AIM/NOPB   | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431AIM/NOPB.B | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431BCM/NOPB   | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431BCM/NOPB.B | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431BIM/NOPB   | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431BIM/NOPB.B | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431CCM/NOPB   | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431CCM/NOPB.B | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431CIM/NOPB   | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |
| LM431CIM/NOPB.B | D            | SOIC         | 8    | 95  | 495    | 8      | 4064   | 3.05   |

**DBZ0003A****PACKAGE OUTLINE****SOT-23 - 1.12 mm max height**

SMALL OUTLINE TRANSISTOR

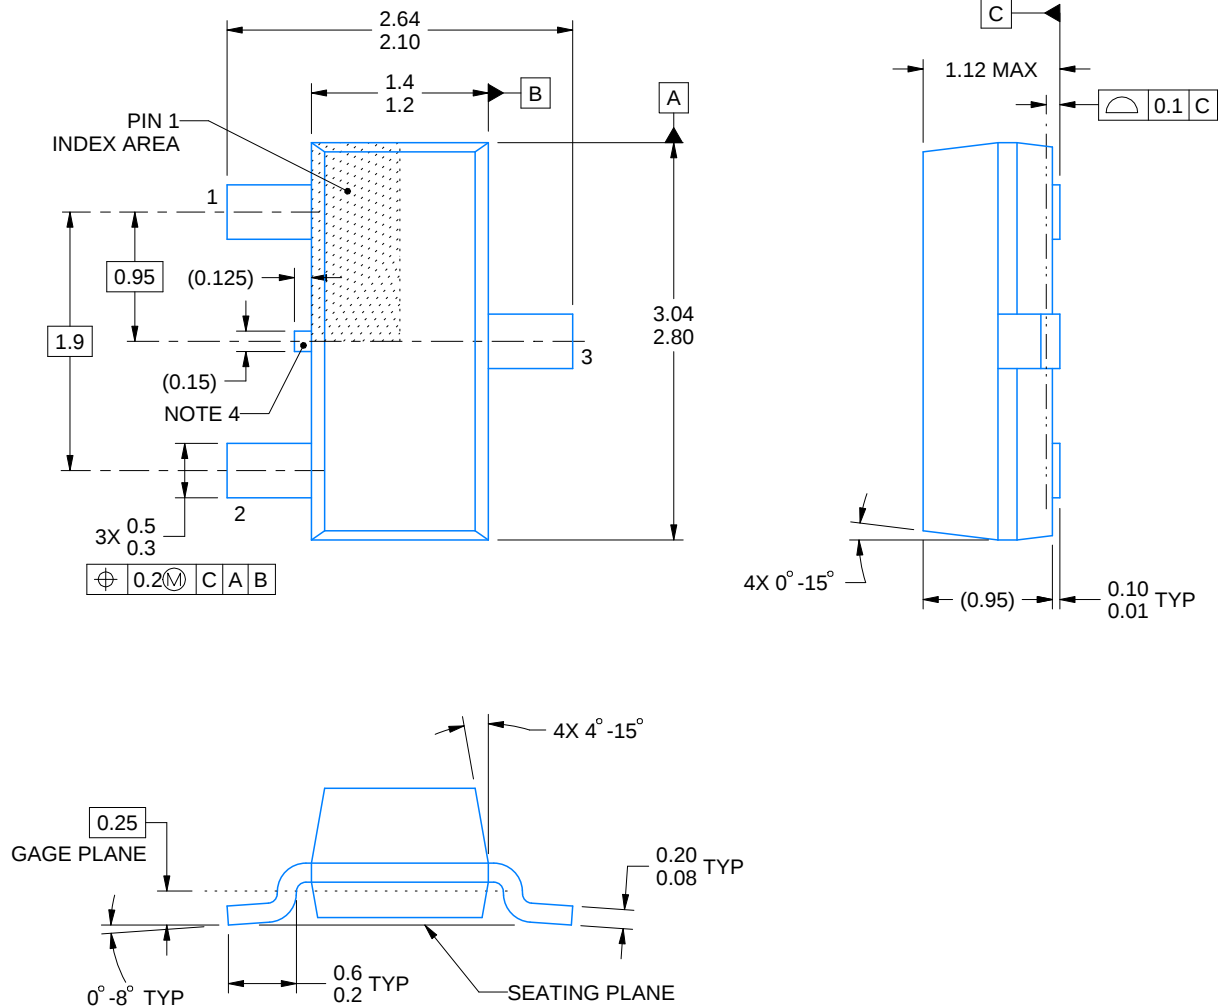

4214838/F 08/2024


**NOTES:**

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC registration TO-236, except minimum foot length.
4. Support pin may differ or may not be present.
5. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side


**DBZ0003A**

**SOT-23 - 1.12 mm max height**

SMALL OUTLINE TRANSISTOR

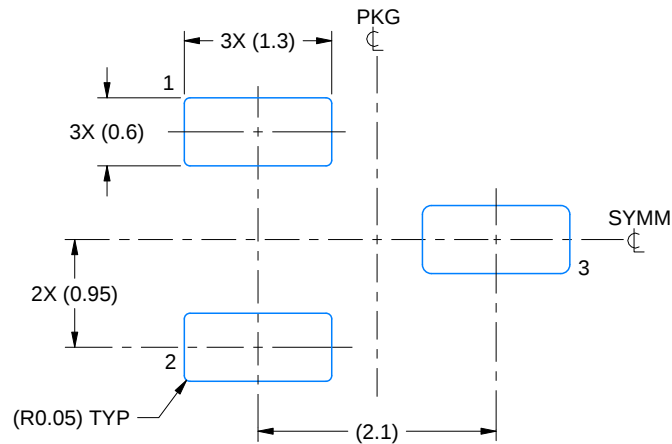

LAND PATTERN EXAMPLE  
SCALE:15X

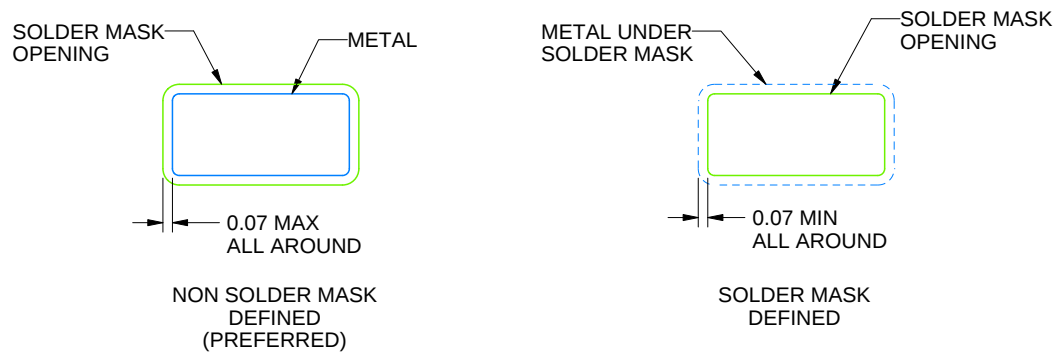

## SOLDER MASK DETAILS

4214838/F 08/2024

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DBZ0003A

SOT-23 - 1.12 mm max height

SMALL OUTLINE TRANSISTOR

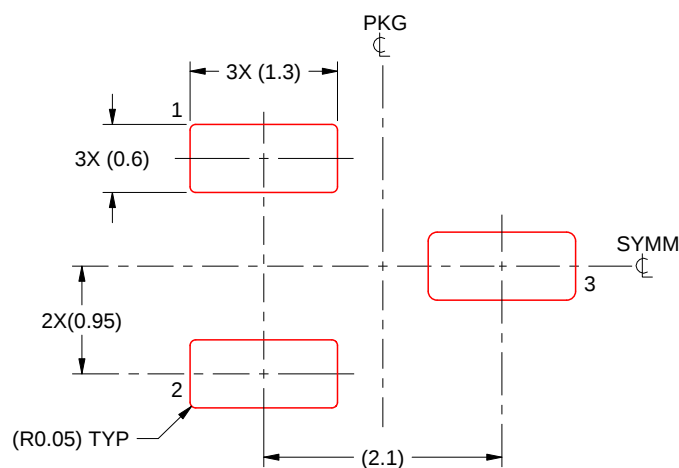

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:15X

4214838/F 08/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.



## PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT




1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

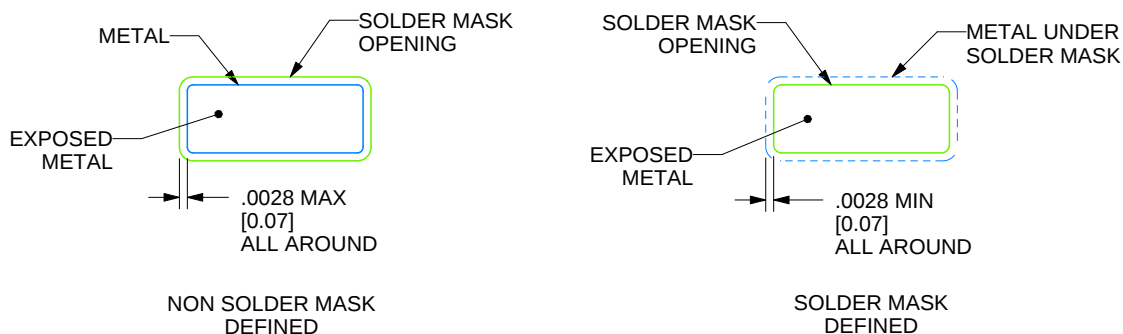

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.


LP0003A



# PACKAGE OUTLINE

TO-92 - 5.34 mm max height

TO-92

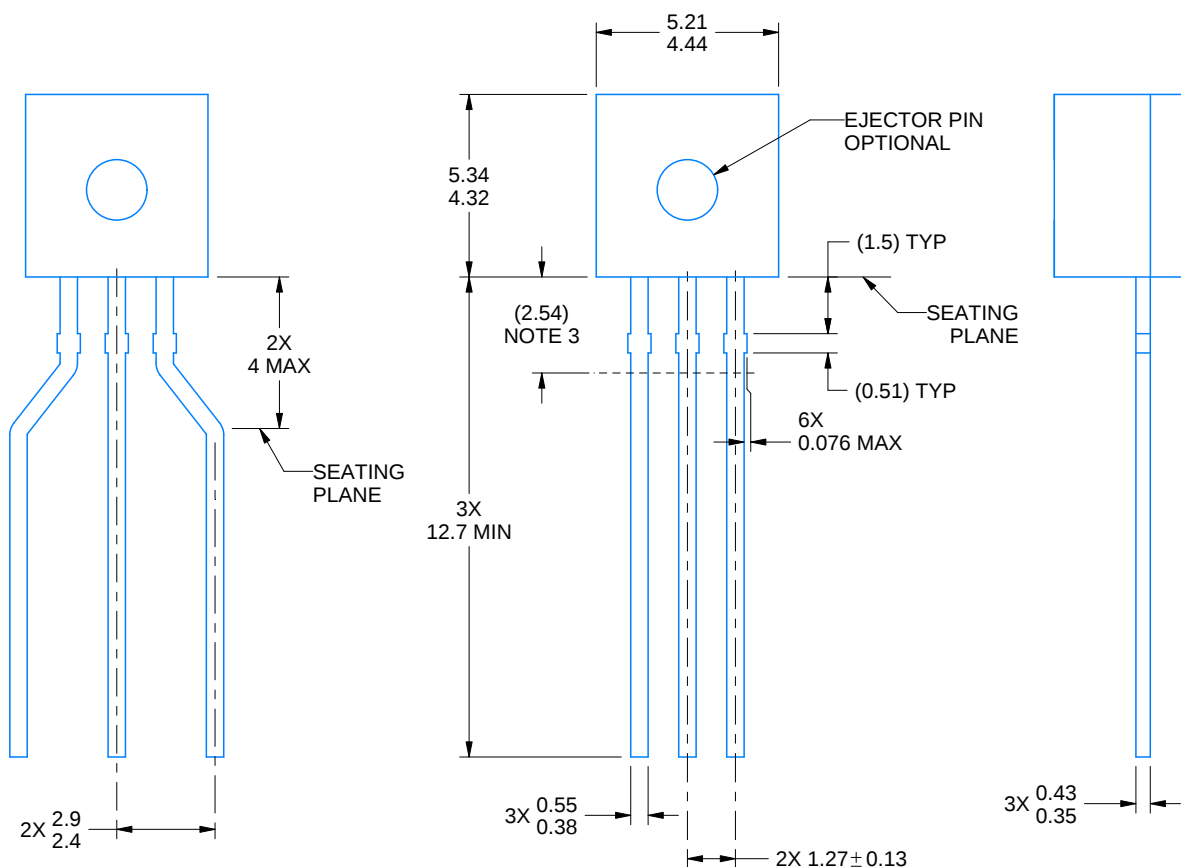

4215214/C 04/2025

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Lead dimensions are not controlled within this area.
4. Reference JEDEC TO-226, variation AA.
5. Shipping method:
  - a. Straight lead option available in bulk pack only.
  - b. Formed lead option available in tape and reel or ammo pack.
  - c. Specific products can be offered in limited combinations of shipping medium and lead options.
  - d. Consult product folder for more information on available options.

# EXAMPLE BOARD LAYOUT


LP0003A

TO-92 - 5.34 mm max height

TO-92

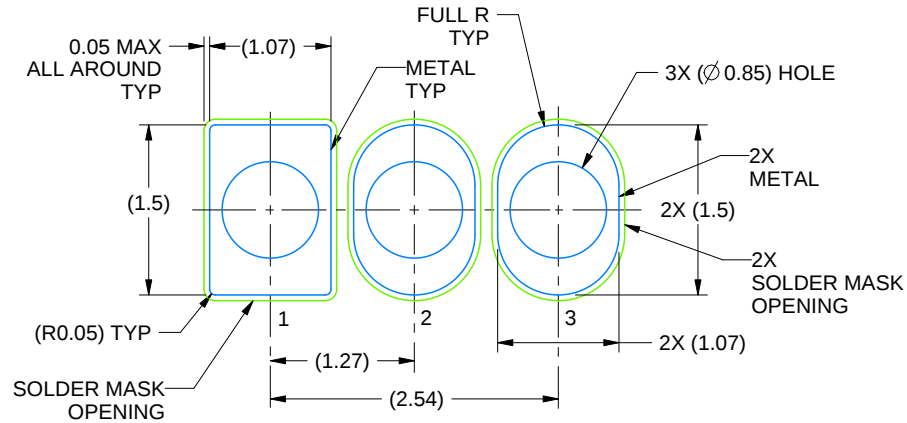

LAND PATTERN EXAMPLE  
STRAIGHT LEAD OPTION  
NON-SOLDER MASK DEFINED  
SCALE:15X

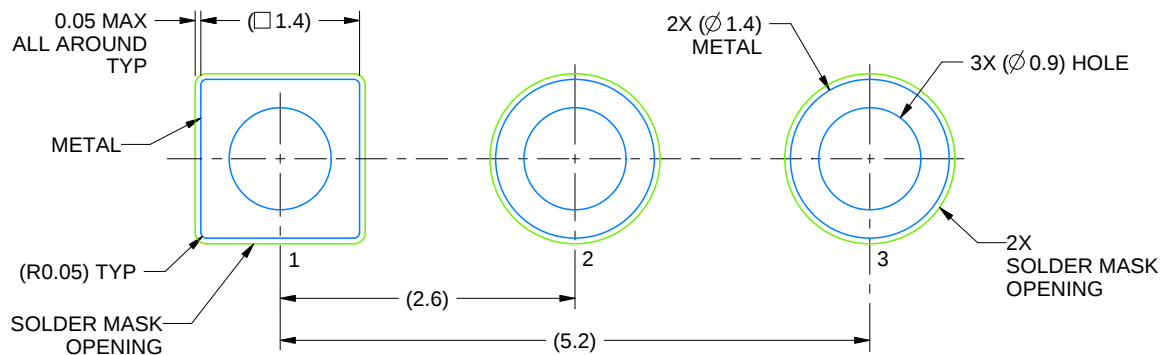

LAND PATTERN EXAMPLE  
FORMED LEAD OPTION  
NON-SOLDER MASK DEFINED  
SCALE:15X


4215214/C 04/2025

# TAPE SPECIFICATIONS

LP0003A

TO-92 - 5.34 mm max height

TO-92

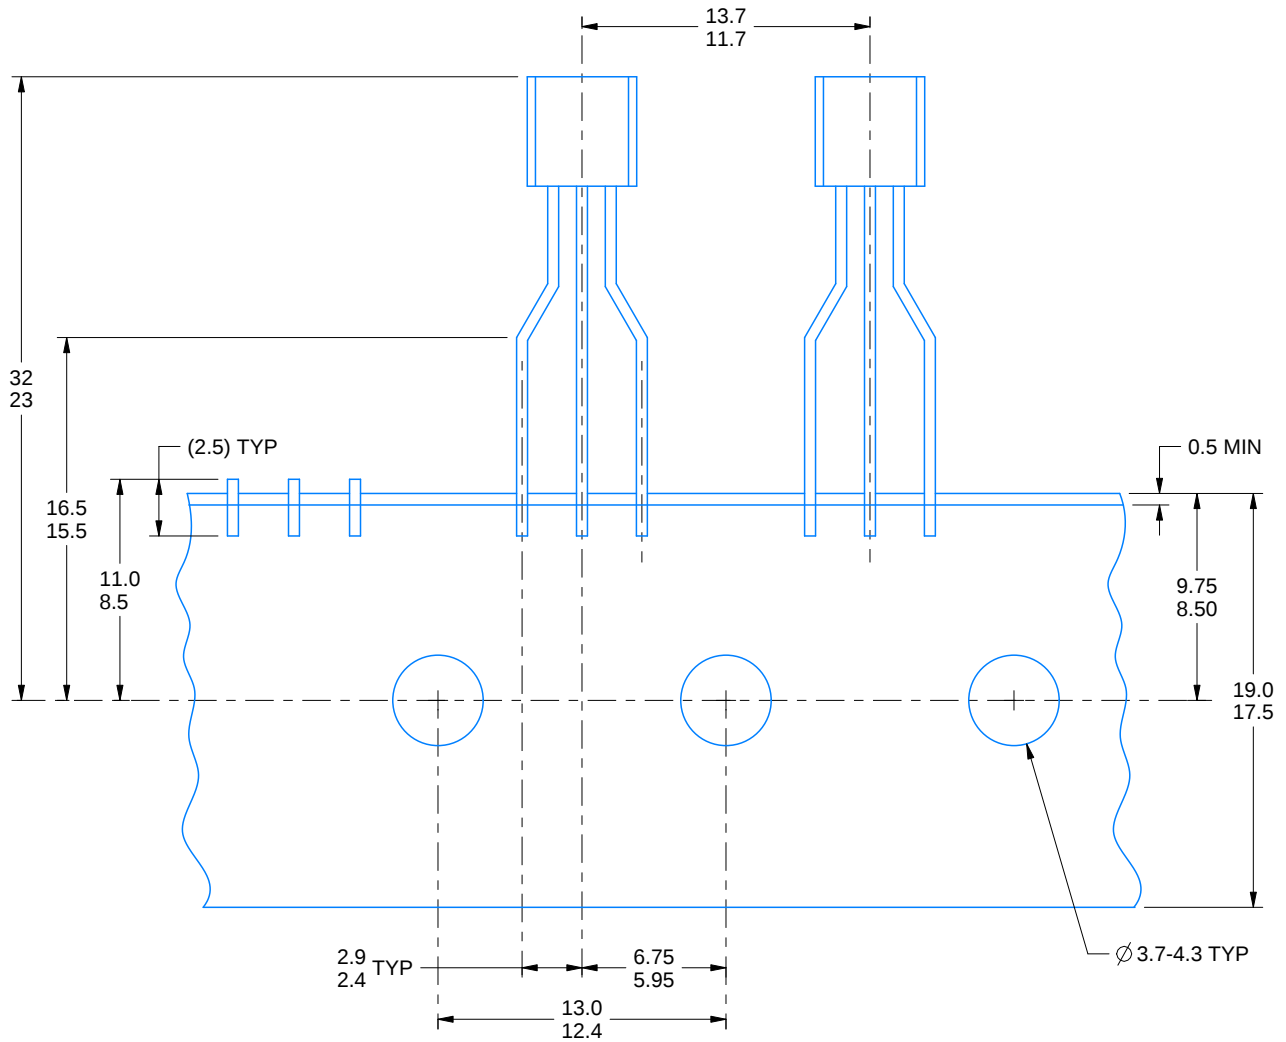

FOR FORMED LEAD OPTION PACKAGE

4215214/C 04/2025

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated