

IPS521/IPS521S

FULLY PROTECTED HIGH SIDE POWER MOSFET SWITCH

Features

- Over temperature protection (with auto-restart)
- Short-circuit protection (current limit)
- Active clamp
- E.S.D protection
- Status feedback
- Open load detection
- Logic ground isolated from power ground

Product Summary

$R_{ds(on)}$	80m Ω (max)
V_{clamp}	50V
I Limit	10A
$V_{open\ load}$	3V


Description

The IPS521/IPS521S are fully protected five terminal high side switches with built in short-circuit , over-temperature, ESD protection, inductive load capability and diagnostic feedback. The output current is controlled when it reaches I_{lim} value. The current limitation is activated until the thermal protection acts. The over-temperature protection turns off the high side switch if the junction temperature exceeds $T_{shutdown}$. It will automatically restart after the junction has cooled $7^{\circ}C$ below $T_{shutdown}$. A diagnostic pin is provided for status feedback of short-circuit, over-temperature and open load detection. The double level shifter circuitry allows large offsets between the logic ground and the load ground.


Truth Table

Op. Conditions	In	Out	Dg
Normal	H	H	H
Normal	L	L	L
Open load	H	H	H
Open load	L	H	H
Over current	H	L (limiting)	L
Over current	L	L	L
Over-temperature	H	L (cycling)	L
Over-temperature	L	L	L

Typical Connection

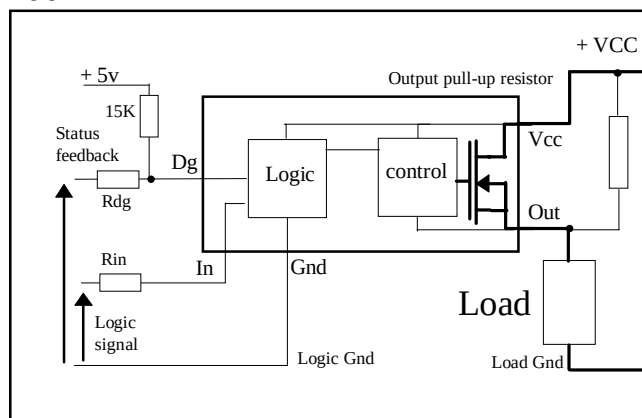

Packages

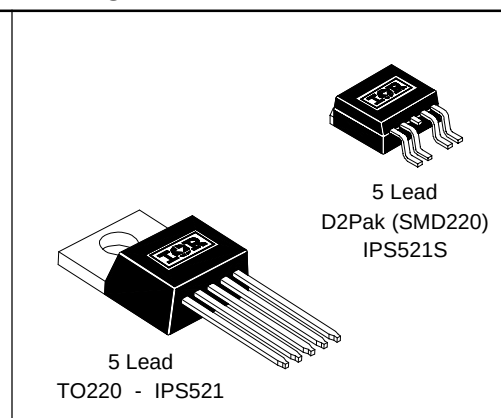

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are referenced to GROUND lead. ($T_j = 25^{\circ}\text{C}$ unless otherwise specified).

Symbol	Parameter	Min.	Max.	Units	Test Conditions
V_{out}	Maximum output voltage	$V_{CC}-50$	$V_{CC}+0.3$	V	
V_{offset}	Maximum logic ground to load ground offset	$V_{CC}-50$	$V_{CC}+0.3$		
V_{in}	Maximum Input voltage	-0.3	7		
$I_{in, max}$	Maximum positive IN current	-5	10	mA	
V_{dg}	Maximum diagnostic output voltage	-0.3	7	V	
$I_{dg, max}$	Maximum diagnostic output current	-1	10	mA	
$I_{sd cont.}$	Diode max. permanent current ⁽¹⁾ ($r_{th}=62^{\circ}\text{C/W}$)	—	2.2	A	
$I_{sd pulsed}$	Diode max. pulsed current ⁽¹⁾	—	10		
ESD1	Electrostatic discharge voltage (Human Body)	—	4	kV	C=100pF, R=1500Ω,
ESD2	Electrostatic discharge voltage (Machine Model)	—	0.5		C=200pF, R=0Ω, L=10μH
P_d	Maximum power dissipation ⁽¹⁾ ($TC=25^{\circ}\text{C}$) IPS521	—	40	W	
	($TC=25^{\circ}\text{C}$) IPS521S	—	1.56		
$T_j \text{ max.}$	Max. storage & operating junction temp.	-40	+150	$^{\circ}\text{C}$	
T_{lead}	Lead temperature (soldering 10 seconds)	—	300		
$V_{cc \text{ max.}}$	Maximum Vcc voltage	—	50	V	

Thermal Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$R_{th \ 1}$	Thermal resistance junction to case	—	3	—	$^{\circ}\text{C/W}$	TO-220
$R_{th \ 2}$	Thermal resistance junction ambient	—	60	—		
$R_{th \ 1}$	Thermal resistance with standard footprint	—	60	—		D ² PAK (SMD220)
$R_{th \ 2}$	Thermal resistance with 1" square footprint	—	35	—		
$R_{th \ 3}$	Thermal resistance junction to case	—	3	—		

(1) Limited by junction temperature (pulsed current limited also by internal wiring)

Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

Symbol	Parameter	Min.	Max.	Units
V _{CC}	Continuous V _{CC} voltage	5.5	35	V
V _{IH}	High level input voltage	4	5.5	
V _{IL}	Low level input voltage	-0.3	0.9	
I _{out}	Continuous output current (T _{amb} = 85°C, T _j = 125°C, R _{th} = 60°C/W,) IPS521	—	2.2	A
I _{out}	Continuous output current (T _{amb} = 85°C, T _j = 125°C, R _{th} = 80°C/W,) IPS521S	—	1.9	
R _{in}	Recommended resistor in series with IN pin	4	6	kΩ
R _{dg}	Recommended resistor in series with DG pin	10	20	

Static Electrical Characteristics

(T_j = 25°C, V_{CC} = 14V unless otherwise specified.)

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
R _{ds(on)} @T _j =25°C	ON state resistance T _j = 25°C	—	55	80	mΩ	V _{in} = 5V, I _{out} = 5A
R _{ds(on)} (V _{CC} =6V)	ON state resistance @ V _{CC} = 6V	—	55	80		V _{in} = 5V, I _{out} = 2.5A
R _{ds(on)} @T _j =150°C	ON state resistance T _j = 150°C	—	110	140		V _{in} = 5V, I _{out} = 5A
V _{CC} oper.	Operating voltage range	5.5	—	35	V	
V _{clamp 1}	V _{CC} to OUT clamp voltage 1	50	55	—		I _d = 10mA (see Fig.1 & 2)
V _{clamp 2}	V _{CC} to OUT clamp voltage 2	—	56	65		I _d = I _{sd} (see Fig.1 & 2)
V _f	Body diode forward voltage	—	0.9	1.2		I _d = 2.5A, V _{in} = 0V
I _{CC} off	Supply current when OFF	—	16	50	μA	V _{in} = 0V, V _{out} = 0V
I _{CC} on	Supply current when ON	—	0.6	2	mA	V _{in} = 5V
I _{CC} ac	Ripple current when ON (AC RMS)	—	20	—	μA	V _{in} = 5V
V _{dgl}	Low level diagnostic output voltage	—	0.15	0.4	V	I _{dg} = 1.6 mA
I _{oh}	Output leakage current	—	50	120	μA	V _{out} = 6V
I _{ol}	Output leakage current	0	—	25		V _{out} = 0V
I _{dg} leakage	Diagnostic output leakage current	—	—	10		V _{dg} = 5.5V
V _{ih}	IN high threshold voltage	—	2.2	3	V	
V _{il}	IN low threshold voltage	1	1.9	—		
I _{in} on	On state IN positive current	—	70	200	μA	V _{in} = 5V
I _n hyst	Input hysteresis	0.1	0.25	0.5	V	

Switching Electrical Characteristics

V_{CC} = 14V, Resistive Load = 2.8Ω, T_j = 25°C, (unless otherwise specified).



Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
T _{don}	Turn-on delay time	—	10	40	μs	See figure 3
T _{r1}	Rise time to V _{out} = V _{CC} - 5V	—	25	60		
T _{r2}	Rise time V _{CC} - 5V to V _{out} = 90% of V _{CC}	—	130	200		
dV/dt (on)	Turn ON dV/dt	—	0.7	2	V/μs	
E _{on}	Turn ON energy	—	1500	—	μJ	
T _{doff}	Turn-off delay time	—	35	70	μs	See figure 4
T _f	Fall time to V _{out} = 10% of V _{CC}	—	25	50		
dV/dt (off)	Turn OFF dV/dt	—	0.9	3	V/μs	
E _{off}	Turn OFF energy	—	250	—	μJ	
T _{diag}	V _{out} to V _{diag} propagation delay	—	5	15	μs	See figure 6

Protection Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I _{lim}	Internal current limit	7	10	14	A	V _{out} = 0V
T _{sd+}	Over-temp. positive going threshold	—	165	—	°C	See fig. 2
T _{sd-}	Over-temp. negative going threshold	—	158	—		See fig. 2
V _{sc}	Short-circuit detection voltage (3)	2	3	4	V	See fig. 2
V _{open load}	Open load detection threshold	2	3	4		

(3) Referenced to V_{CC}

Lead Assignments

	
1 - Ground	
2 - In	
3 - Vcc	
4 - DG	
5 - Out	
5 Lead - TO220	5 Lead - D ² PAK (SMD220)
IPS521	IPS521S
Part Number	

Functional Block Diagram

All values are typical

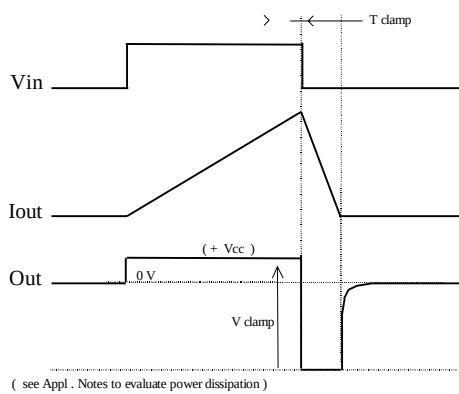
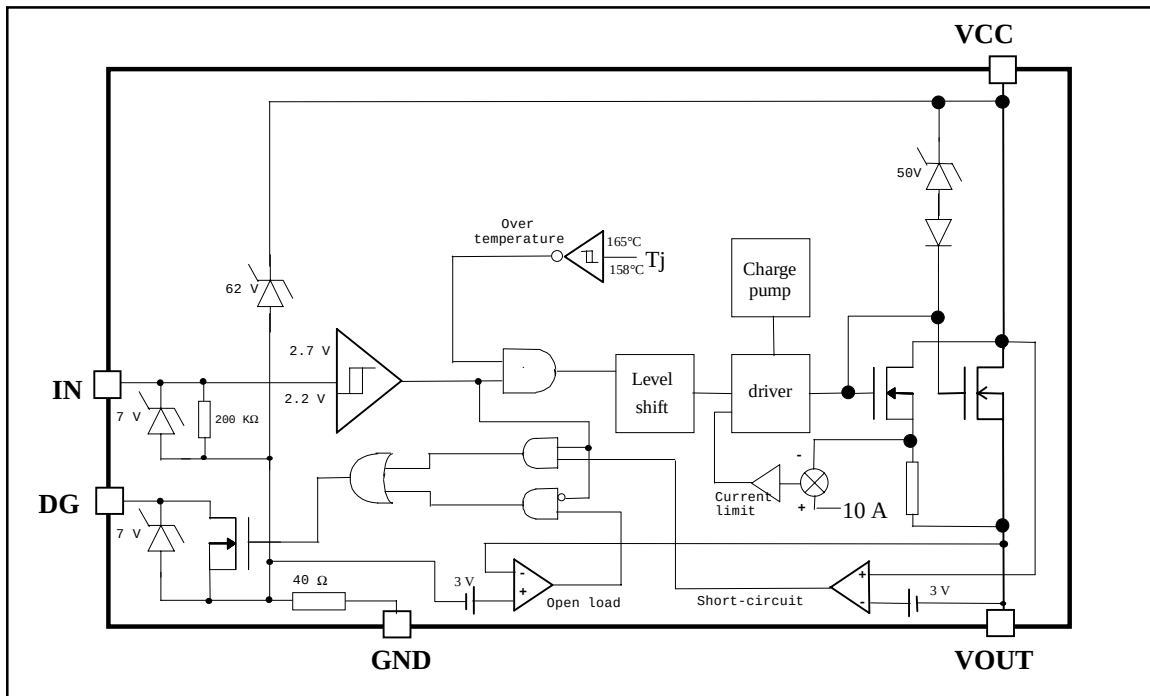


Figure 1 - Active clamp waveforms

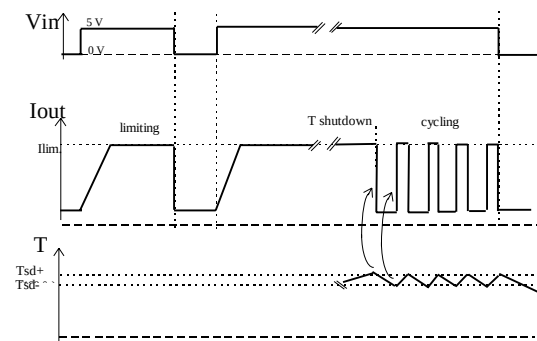


Figure 2 - Protection timing diagram

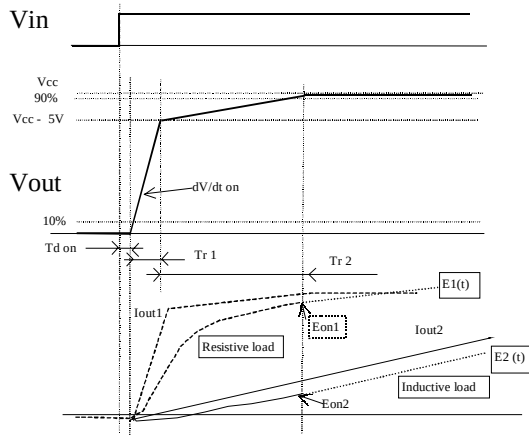


Figure 3 - Switching times definition (turn-on)
Turn on energy with a resistive or an
inductive load

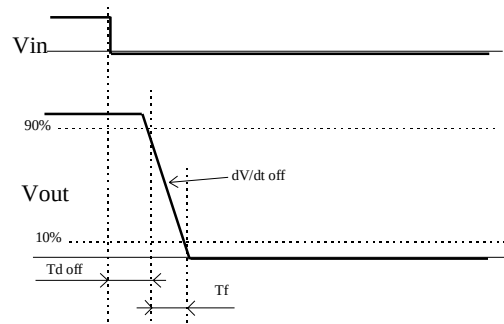


Figure 4 - Switching times definition (turn-off)

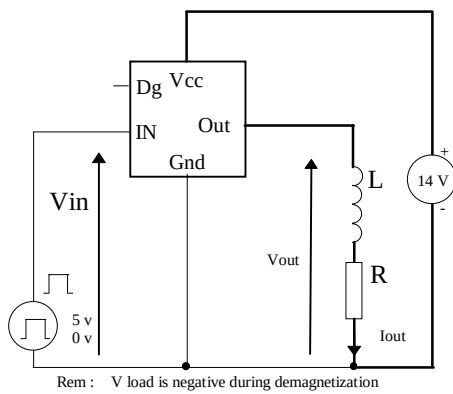


Figure 5 - Active clamp test circuit

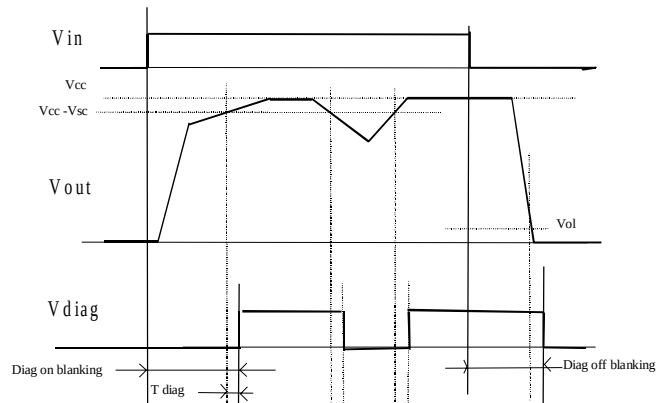


Figure 6 - Diagnostic delay definitions

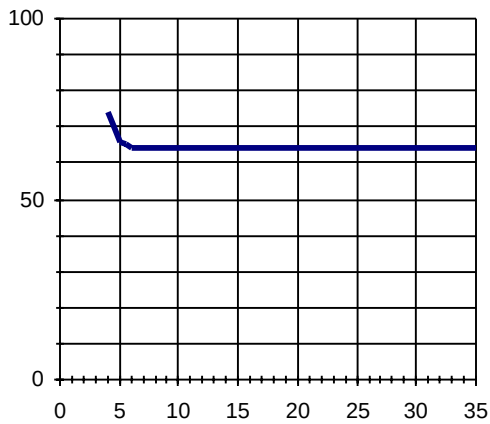


Figure 7 - R_{ds(on)} (mΩ) Vs V_{cc} (V)

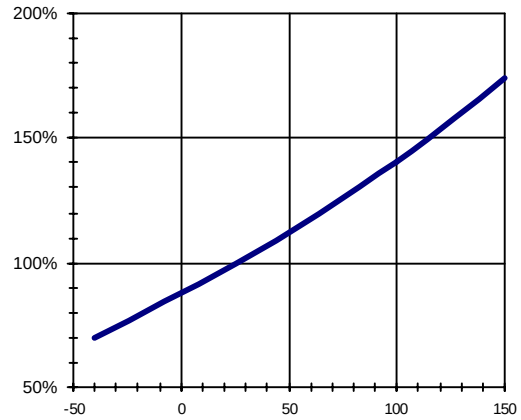


Figure 8 - Normalized R_{ds(on)} (%) Vs T_j (°C)

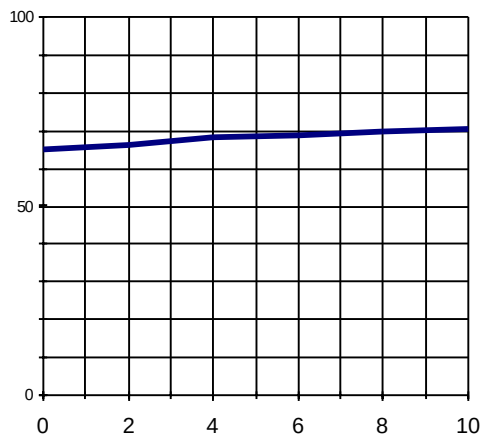


Figure 9 - R_{ds(on)} (mΩ) Vs I_{out} (A)

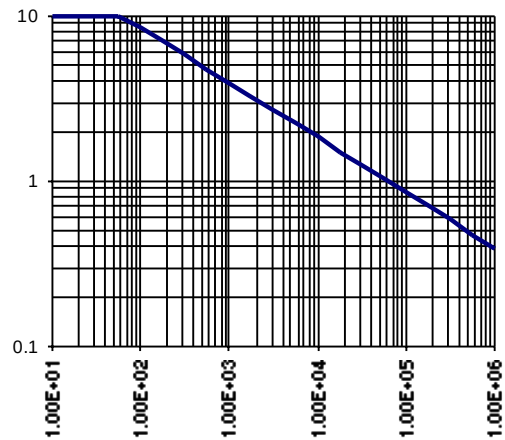


Figure 10 - Max. I_{out} (A) Vs Load Inductance (uH)

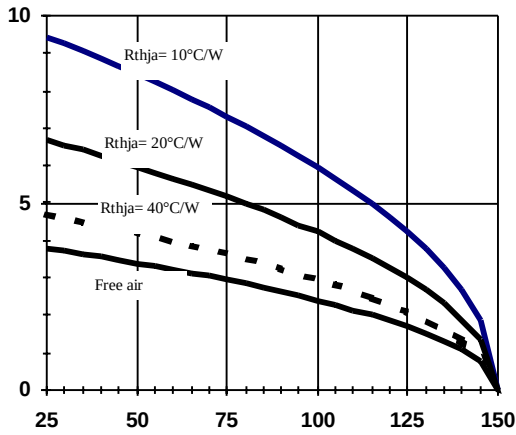


Figure 11a - Max load current (A) Vs Tamb (°C)
IPS521

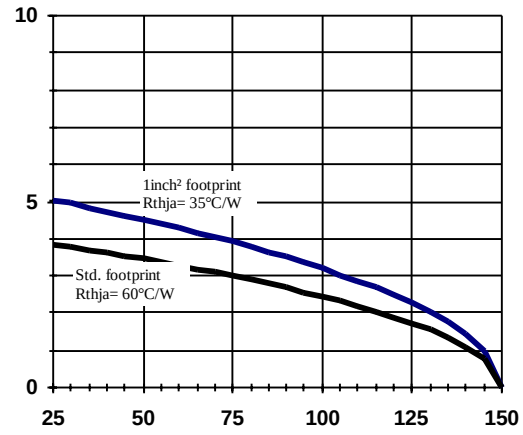


Figure 11b - Max load current (A) Vs Tamb (°C)
IPS521S

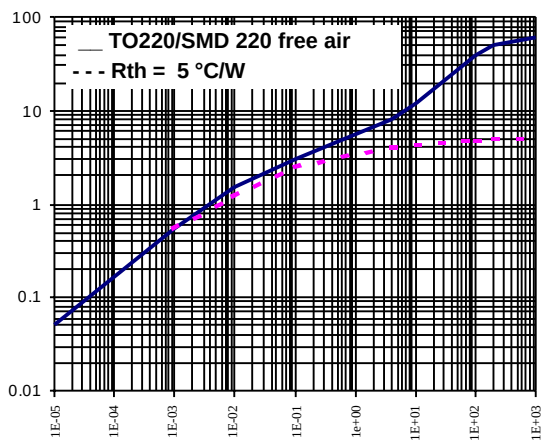


Figure 12 - Transient Thermal Impedance (°C/W)
Vs Time (S)

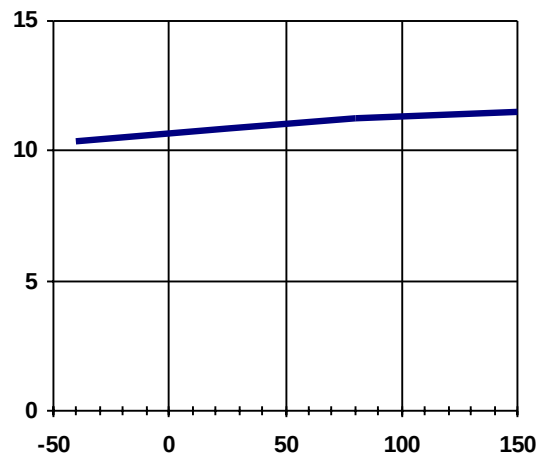


Figure 13 - I_{lim} (A) Vs T_J (°C)

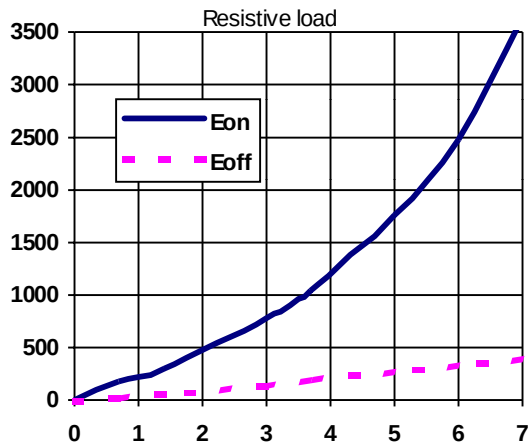


Figure 14 - E_{on} , E_{off} (μJ) Vs I_{out} (A)

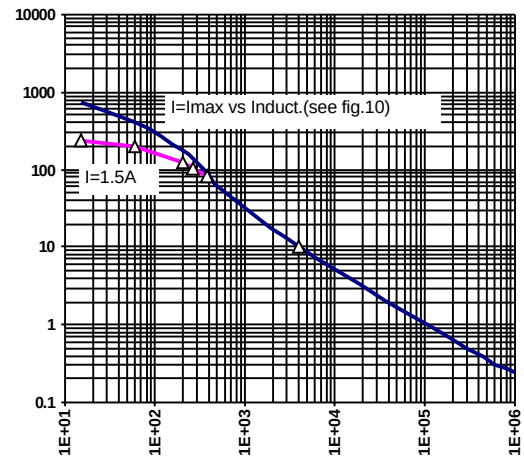


Figure 15 - E_{on} (μJ) Vs Load Inductance (μH)
(see Fig. 3)

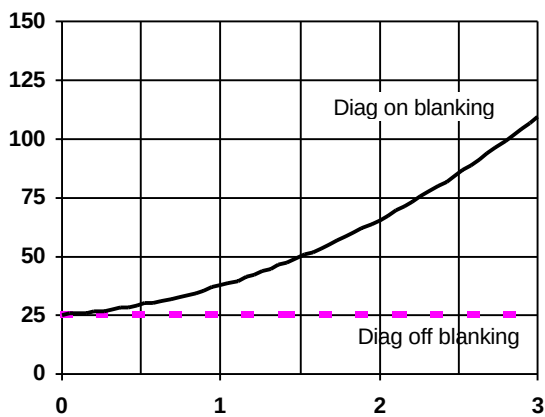


Figure 16 - Diag Blanking time (μS) Vs I_{out} (A)
(resistive load - see Fig. 6)

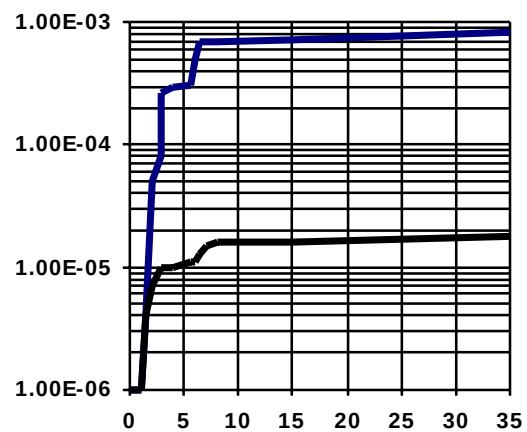


Figure 17 - I_{cc} (mA) Vs V_{cc} (V)

International
IOR Rectifier

Technical drawing of a 5-pin connector. The drawing includes a top view and a side view. Dimensions are provided in millimeters [inches].

Top View Dimensions:

- Overall width: 10.54 [.415]
- Pin pitch (between pins 1-5): 2.94 [.116]
- Pin width (pins 1-5): 2.54 [.100]
- Pin 1 to centerline: 15.87 [.625]
- Pin 5 to centerline: 14.48 [.570]
- Pin 1 to pin 5: 14.09 [.555]
- Pin 5 to pin 6: 13.59 [.535]
- Pin 1 to pin 6: 1.70 [.067]
- Pin 1 to pin 2: 0.25 [.010]
- Pin 2 to pin 3: 0.51 [.020]
- Pin 3 to pin 4: 1.01 [.040]
- Pin 4 to pin 5: 0.51 [.020]
- Pin 5 to pin 6: 0.25 [.010]
- Pin 6 to pin 7: 0.25 [.010]
- Pin 7 to pin 8: 0.25 [.010]
- Pin 8 to pin 9: 0.25 [.010]
- Pin 9 to pin 10: 0.25 [.010]
- Pin 10 to pin 11: 0.25 [.010]
- Pin 11 to pin 12: 0.25 [.010]
- Pin 12 to pin 13: 0.25 [.010]
- Pin 13 to pin 14: 0.25 [.010]
- Pin 14 to pin 15: 0.25 [.010]
- Pin 15 to pin 16: 0.25 [.010]
- Pin 16 to pin 17: 0.25 [.010]
- Pin 17 to pin 18: 0.25 [.010]
- Pin 18 to pin 19: 0.25 [.010]
- Pin 19 to pin 20: 0.25 [.010]
- Pin 20 to pin 21: 0.25 [.010]
- Pin 21 to pin 22: 0.25 [.010]
- Pin 22 to pin 23: 0.25 [.010]
- Pin 23 to pin 24: 0.25 [.010]
- Pin 24 to pin 25: 0.25 [.010]
- Pin 25 to pin 26: 0.25 [.010]
- Pin 26 to pin 27: 0.25 [.010]
- Pin 27 to pin 28: 0.25 [.010]
- Pin 28 to pin 29: 0.25 [.010]
- Pin 29 to pin 30: 0.25 [.010]
- Pin 30 to pin 31: 0.25 [.010]
- Pin 31 to pin 32: 0.25 [.010]
- Pin 32 to pin 33: 0.25 [.010]
- Pin 33 to pin 34: 0.25 [.010]
- Pin 34 to pin 35: 0.25 [.010]
- Pin 35 to pin 36: 0.25 [.010]
- Pin 36 to pin 37: 0.25 [.010]
- Pin 37 to pin 38: 0.25 [.010]
- Pin 38 to pin 39: 0.25 [.010]
- Pin 39 to pin 40: 0.25 [.010]
- Pin 40 to pin 41: 0.25 [.010]
- Pin 41 to pin 42: 0.25 [.010]
- Pin 42 to pin 43: 0.25 [.010]
- Pin 43 to pin 44: 0.25 [.010]
- Pin 44 to pin 45: 0.25 [.010]
- Pin 45 to pin 46: 0.25 [.010]
- Pin 46 to pin 47: 0.25 [.010]
- Pin 47 to pin 48: 0.25 [.010]
- Pin 48 to pin 49: 0.25 [.010]
- Pin 49 to pin 50: 0.25 [.010]
- Pin 50 to pin 51: 0.25 [.010]
- Pin 51 to pin 52: 0.25 [.010]
- Pin 52 to pin 53: 0.25 [.010]
- Pin 53 to pin 54: 0.25 [.010]
- Pin 54 to pin 55: 0.25 [.010]
- Pin 55 to pin 56: 0.25 [.010]
- Pin 56 to pin 57: 0.25 [.010]
- Pin 57 to pin 58: 0.25 [.010]
- Pin 58 to pin 59: 0.25 [.010]
- Pin 59 to pin 60: 0.25 [.010]
- Pin 60 to pin 61: 0.25 [.010]
- Pin 61 to pin 62: 0.25 [.010]
- Pin 62 to pin 63: 0.25 [.010]
- Pin 63 to pin 64: 0.25 [.010]
- Pin 64 to pin 65: 0.25 [.010]
- Pin 65 to pin 66: 0.25 [.010]
- Pin 66 to pin 67: 0.25 [.010]
- Pin 67 to pin 68: 0.25 [.010]
- Pin 68 to pin 69: 0.25 [.010]
- Pin 69 to pin 70: 0.25 [.010]
- Pin 70 to pin 71: 0.25 [.010]
- Pin 71 to pin 72: 0.25 [.010]
- Pin 72 to pin 73: 0.25 [.010]
- Pin 73 to pin 74: 0.25 [.010]
- Pin 74 to pin 75: 0.25 [.010]
- Pin 75 to pin 76: 0.25 [.010]
- Pin 76 to pin 77: 0.25 [.010]
- Pin 77 to pin 78: 0.25 [.010]
- Pin 78 to pin 79: 0.25 [.010]
- Pin 79 to pin 80: 0.25 [.010]
- Pin 80 to pin 81: 0.25 [.010]
- Pin 81 to pin 82: 0.25 [.010]
- Pin 82 to pin 83: 0.25 [.010]
- Pin 83 to pin 84: 0.25 [.010]
- Pin 84 to pin 85: 0.25 [.010]
- Pin 85 to pin 86: 0.25 [.010]
- Pin 86 to pin 87: 0.25 [.010]
- Pin 87 to pin 88: 0.25 [.010]
- Pin 88 to pin 89: 0.25 [.010]
- Pin 89 to pin 90: 0.25 [.010]
- Pin 90 to pin 91: 0.25 [.010]
- Pin 91 to pin 92: 0.25 [.010]
- Pin 92 to pin 93: 0.25 [.010]
- Pin 93 to pin 94: 0.25 [.010]
- Pin 94 to pin 95: 0.25 [.010]
- Pin 95 to pin 96: 0.25 [.010]
- Pin 96 to pin 97: 0.25 [.010]
- Pin 97 to pin 98: 0.25 [.010]
- Pin 98 to pin 99: 0.25 [.010]
- Pin 99 to pin 100: 0.25 [.010]
- Pin 100 to pin 101: 0.25 [.010]
- Pin 101 to pin 102: 0.25 [.010]
- Pin 102 to pin 103: 0.25 [.010]
- Pin 103 to pin 104: 0.25 [.010]
- Pin 104 to pin 105: 0.25 [.010]
- Pin 105 to pin 106: 0.25 [.010]
- Pin 106 to pin 107: 0.25 [.010]
- Pin 107 to pin 108: 0.25 [.010]
- Pin 108 to pin 109: 0.25 [.010]
- Pin 109 to pin 110: 0.25 [.010]
- Pin 110 to pin 111: 0.25 [.010]
- Pin 111 to pin 112: 0.25 [.010]
- Pin 112 to pin 113: 0.25 [.010]
- Pin 113 to pin 114: 0.25 [.010]
- Pin 114 to pin 115: 0.25 [.010]
- Pin 115 to pin 116: 0.25 [.010]
- Pin 116 to pin 117: 0.25 [.010]
- Pin 117 to pin 118: 0.25 [.010]
- Pin 118 to pin 119: 0.25 [.010]
- Pin 119 to pin 120: 0.25 [.010]
- Pin 120 to pin 121: 0.25 [.010]
- Pin 121 to pin 122: 0.25 [.010]
- Pin 122 to pin 123: 0.25 [.010]
- Pin 123 to pin 124: 0.25 [.010]
- Pin 124 to pin 125: 0.25 [.010]
- Pin 125 to pin 126: 0.25 [.010]
- Pin 126 to pin 127: 0.25 [.010]
- Pin 127 to pin 128: 0.25 [.010]
- Pin 128 to pin 129: 0.25 [.010]
- Pin 129 to pin 130: 0.25 [.010]
- Pin 130 to pin 131: 0.25 [.010]
- Pin 131 to pin 132: 0.25 [.010]
- Pin 132 to pin 133: 0.25 [.010]
- Pin 133 to pin 134: 0.25 [.010]
- Pin 134 to pin 135: 0.25 [.010]
- Pin 135 to pin 136: 0.25 [.010]
- Pin 136 to pin 137: 0.25 [.010]
- Pin 137 to pin 138: 0.25 [.010]
- Pin 138 to pin 139: 0.25 [.010]
- Pin 139 to pin 140: 0.25 [.010]
- Pin 140 to pin 141: 0.25 [.010]
- Pin 141 to pin 142: 0.25 [.010]
- Pin 142 to pin 143: 0.25 [.010]
- Pin 143 to pin 144: 0.25 [.010]
- Pin 144 to pin 145: 0.25 [.010]
- Pin 145 to pin 146: 0.25 [.010]
- Pin 146 to pin 147: 0.25 [.010]
- Pin 147 to pin 148: 0.25 [.010]
- Pin 148 to pin 149: 0.25 [.010]
- Pin 149 to pin 150: 0.25 [.010]
- Pin 150 to pin 151: 0.25 [.010]</

Technical drawing of a circular metal part, likely a flange or base plate, showing multiple views and dimensions in millimeters and inches.

Top View: Shows a circular part with a central hole and three large triangular cutouts. The outer diameter is $\phi 360.00$ [14.173] MAX. The central hole diameter is $\phi 60.00$ [3.362] MIN. The distance from the center to the inner corner of the triangular cutouts is $\phi 13.52$ [.532] and 12.80 [.504]. The distance from the center to the outer edge of the triangular cutouts is 26.40 [1.039] and 24.40 [.961].


Side View: Shows the profile of the part with a total height of 24.30 [.957] and 23.90 [.941]. The top flange thickness is 0.368 [.0145] and 0.342 [.0135]. The bottom flange thickness is 4.72 [.186] and 4.52 [.178]. The distance from the bottom flange to the top of the main body is 15.42 [.609] and 15.22 [.601].

Front View: Shows the part with a central hole and two large rectangular cutouts. The outer diameter is $\phi 360.00$ [14.173] MAX. The distance from the center to the inner corner of the rectangular cutouts is 10.90 [.429] and 10.70 [.421]. The distance from the center to the outer edge of the rectangular cutouts is 16.10 [.634]. The distance from the center to the top edge of the rectangular cutouts is 11.60 [.457] and 11.40 [.449]. The distance from the center to the bottom edge of the rectangular cutouts is 1.85 [.073] and 1.65 [.065]. The distance from the center to the top edge of the main body is 4.10 [.161] and 3.90 [.153]. The distance from the center to the bottom edge of the main body is 1.60 [.063] and 1.50 [.059]. The distance from the center to the top edge of the top flange is 1.60 [.063] and 1.50 [.059]. The distance from the center to the bottom edge of the bottom flange is 1.75 [.069] and 1.25 [.049].

Notes:

1. OUTLINE CONFORMS TO EIA-481 & EIA-541.
2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].

Case Outline 5 Lead - D²PAK (SMD220)

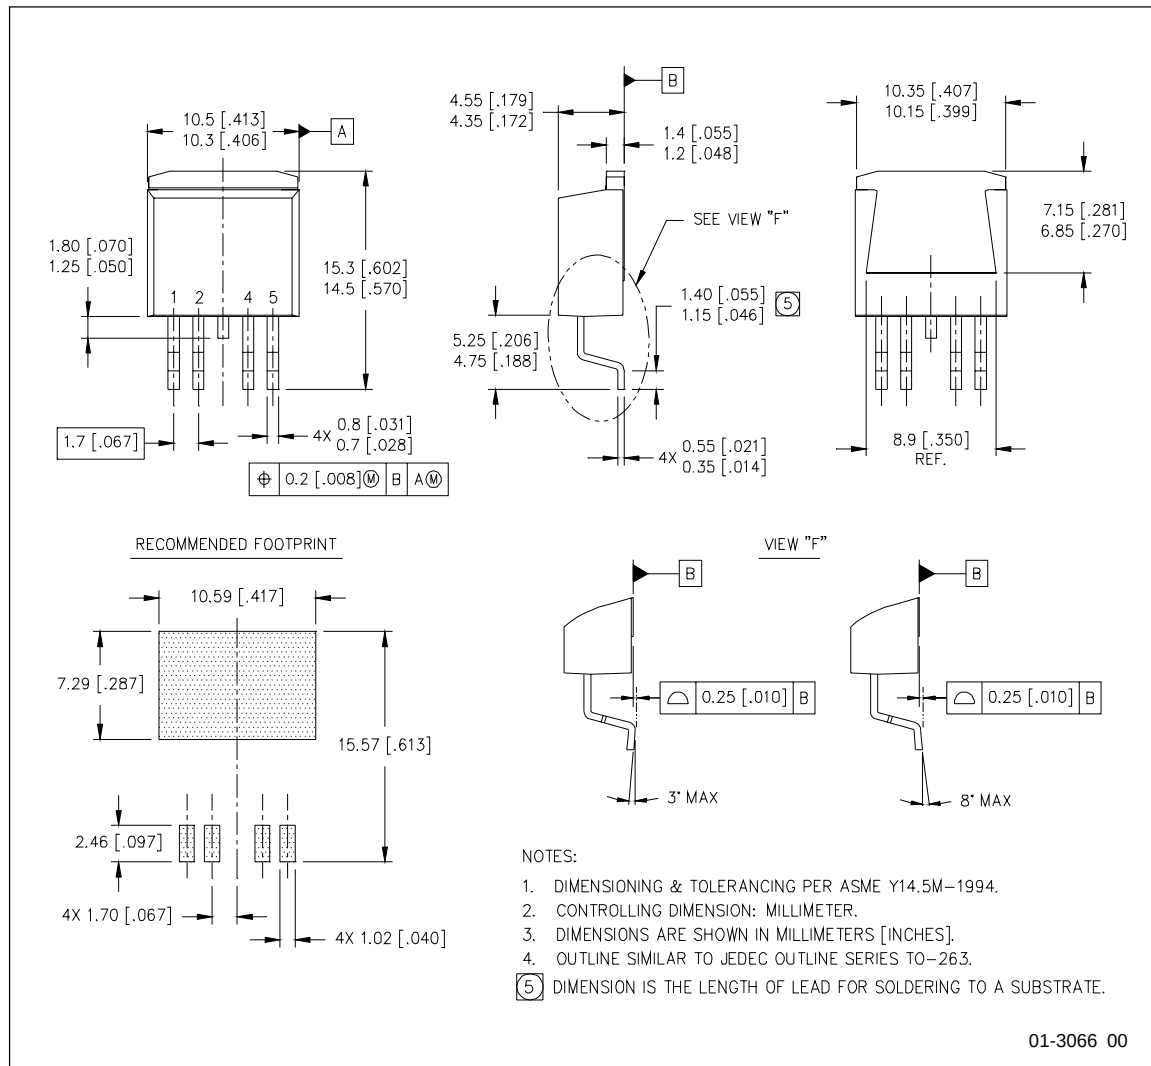

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
IR EUROPEAN REGIONAL CENTRE: 439/445 Godstone Rd., Whyteleafe, Surrey CR3 0BL, United Kingdom
Tel: ++ 44 (0) 20 8645 8000
IR JAPAN: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171-0021 Tel: 8133 983 0086
IR HONG KONG: Unit 308, #F, New East Ocean Centre, No. 9 Science Museum Road, Tsimshatsui East, Kowloon
Hong Kong Tel: (852) 2803-7380
Data and specifications subject to change without notice. 3/27/2000

Note: For the most current drawings please refer to the IR website at:
<http://www.irf.com/package/>