



ON Semiconductor®

<http://onsemi.com>

LV8019LP

Bi-CMOS IC Forward/Reverse Motor Driver

Overview

The LV8019LP is a forward/reverse motor driver.

Features

- One H-bridge driver channel
- Provides a constant current output
- Built-in thermal shutdown circuit

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$ and $\text{SGND} = \text{PGND} = 0\text{V}$

Parameter	Symbol	Conditions	Ratings	Unit
Output block supply voltage	V_M max		-0.5 to 8.4	V
Control block supply voltage	V_{CC} max		-0.5 to 7.0	V
Constant current output block supply voltage	V_{RG} max		-0.5 to 6.0	V
Maximum output current	I_O max		1.2	A
	I_O peak1	$t \leq 200\text{ms}$, $f = 2\text{Hz}$	3	A
	I_O peak2	$t \leq 10\text{ms}$, $f = 2\text{Hz}$	5	A
Input signal voltage	V_{IN} max		-0.5 to $V_{CC}+0.5$	A
Allowable power dissipation	P_d max1	Independent IC	0.2	W
	P_d max2	When mounted on a circuit board *1	1.05	W
Operating temperature	T_{opr}		-30 to +85	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

* : Specified substrate : $40 \times 50 \times 0.8\text{mm}^3$, glass epoxy four-layer (2S2P) board

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

LV8019LP

Recommended Operating Conditions at Ta = 25°C and SGND = PGND = 0V

Parameter	Symbol	Conditions	Ratings	Unit
Output block supply voltage	VM		3.0 to 7.4	V
Control block supply voltage	V _{CC}		2.7 to 6.0	V
Constant current output block supply voltage	VRGIN		1.5 to V _{CC}	V
Input signal voltage	V _{IN}		0 to V _{CC}	V
Maximum input signal frequency	f _{max}	Duty = 50%	100	kHz

Electrical Characteristics Ta = 25°C, V_{CC} = VM = 5V, and SGND = PGND = 0V unless otherwise specified.

Parameter		Symbol	Conditions	Ratings			Unit
				min	typ	max	
Standby mode output block current consumption		IMO	EN = 0V, IN1 = IN2 = ICTRL = 0V			1.0	μA
Control block current consumption	Standby mode	I _{CCO}	EN = 0V, IN1 = IN2 = ICTRL = 0V		0	1.0	μA
	Operation mode	I _{CC}	EN = 5V		0.8	1.3	mA
High-level input voltage		V _{INH}	IN*	2.5		V _{CC}	V
Low-level input voltage		V _{INL}	IN*	0		0.8	V
High-level input current		I _{INH}	IN*			1.0	μA
Low-level input current		I _{INL}	IN*	-1.0			μA
High-level EN pin current		I _{ENH}	EN	15	25	35	μA
Low-level EN pin current		I _{ENL}	EN			1.0	μA
Output on resistance	1	R _{ON1}	VM = 5V, sink + source		0.30	0.40	Ω
	2	R _{ON2}	VM = 3V, sink + source		0.45	0.60	Ω
ISET setting resistance		RSET	Between ISET pin and SGND	80			Ω
ISET pin voltage		VISET	RSET > 80Ω	0.90	1.05	1.20	V
CC pin output saturation voltage		VCSAT	RSET = 150Ω *1			1.5	V
CC pin output leakage current		ICONL	CTRL = 0V			1.0	μA
Low voltage shutdown operation voltage		VLVD	V _{CC} pin voltage detection	2.10	2.35	2.60	V
High-level output turn-on time		TOH	The transition from 10% to 90% of the output amplitude *2		0.1	1.0	μs
Low-level output turn-on time		TOL	The transition from 90% to 10% of the output amplitude *2		0.2	2.0	μs
Thermal shutdown temperature		TSD	*2	150	180		°C
Thermal shutdown hysteresis		ΔTSD	*2		40		°C



*1 : Voltage between CC pin and ISET pin

*2 : Design guarantee: These characteristics are not measured.


Package Dimensions

unit : mm (typ)


3321

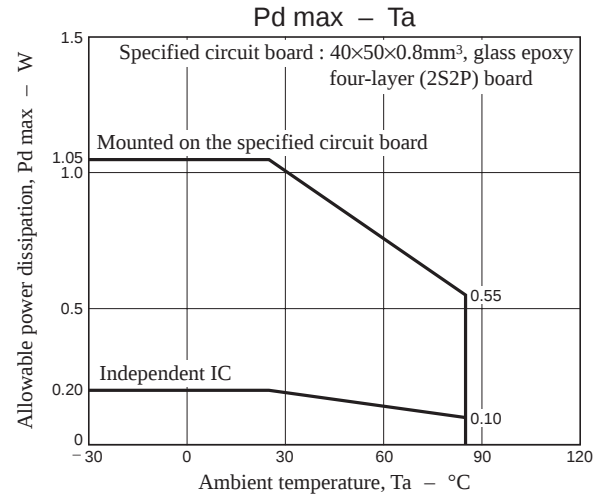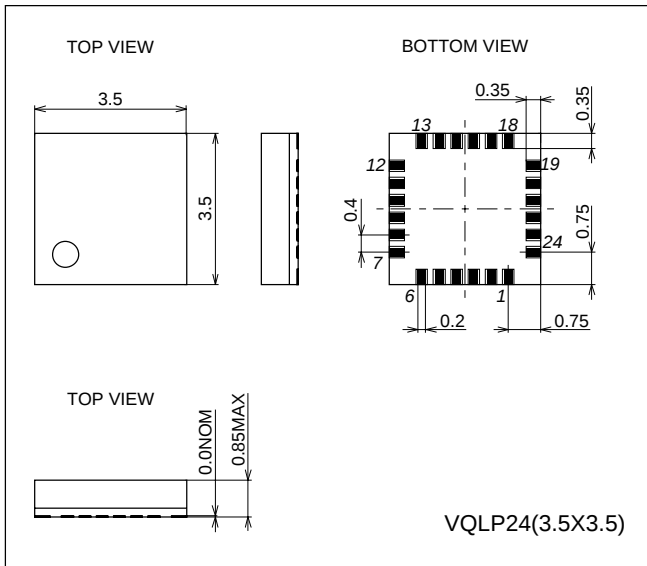


Pin Assignment

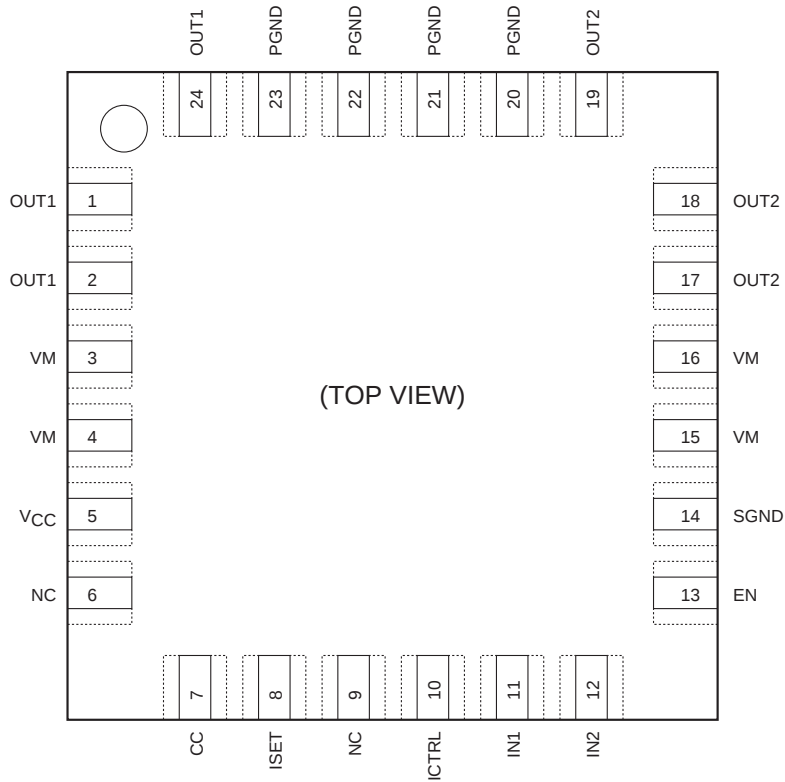

Constant current output

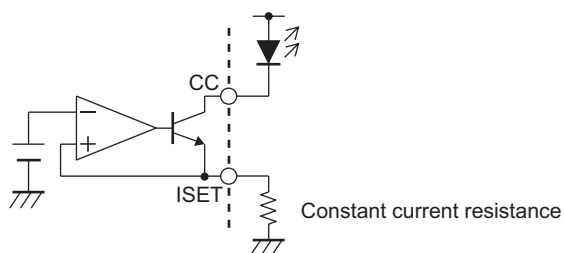

Block Diagram

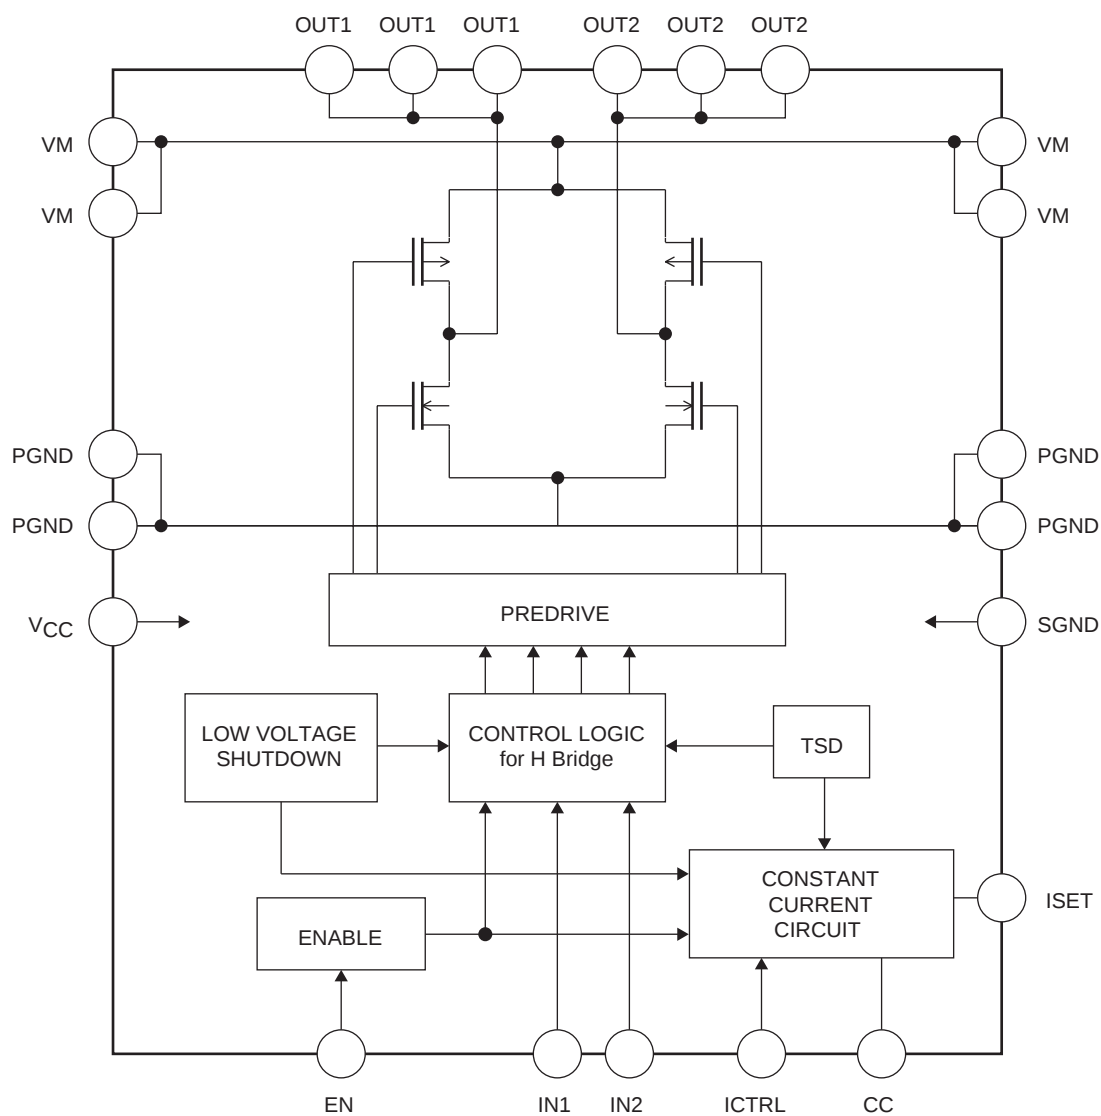

Truth Table


EN	IN1	IN2	CTRL	OUT1	OUT2	CC	Mode
H	H	H	X	L	L	X	Break
H	H	L	X	H	L	X	Forward
H	L	H	X	L	H	X	Reverse
H	L	L	X	Z	Z	X	Standby
L	X	X	X	L	L	L	Standby
H	X	X	L	X	X	Z	Constant current output off
H	X	X	H	X	X	ON	Constant current output on

H : High level
L : Low level
Z : Hi-impedance
X : Don't care

LV8019LP

Pin Functions

Pin No.	Pin	Description	Equivalent circuit
11 12	IN1 IN2	Logic input 1 Logic input 2 The output is set by the combination of the input 1 and 2 states. See the truth table for details.	
10	ICTRL	Controls the output on/off state of the constant current block.	
13	EN	EN pin Controls the on/off state of the H-bridge output (OUT1 and OUT2) and the constant current output. See the truth table for details.	
1, 2, 24, 17, 18, 19	OUT1 OUT2	Output 1 Output 2 The source side is a p-channel transistor and sink side is an n-channel transistor.	
7 8	CC ISET	Constant current output Constant current setting The output current (CC) is set by connecting a resistor between the ISET pin and ground.	
5	VCC	Signal system power supply	
3, 4, 15, 16	VM	Power system power supply	
14	SGND	Signal system ground	
21, 22, 23	PGND	Power system ground	

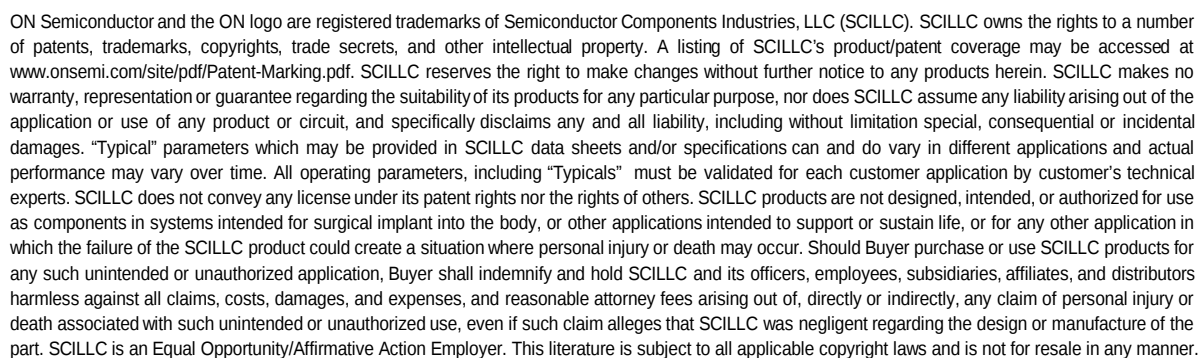

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[LV8019LP-MPB-E](#)