




PART NO.

9820 Series

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	Veena	09/03/09	Suresh	09/03/09	Farnell	23/03/09

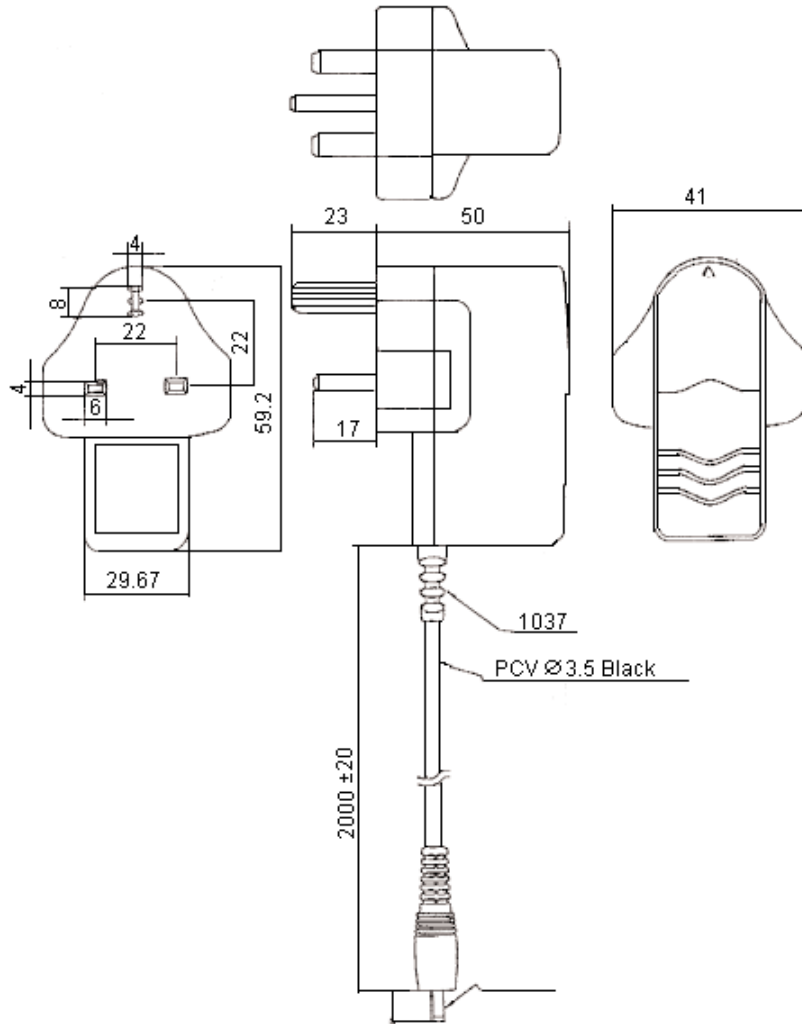

Dimensions : Millimetres

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2009.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:

Veena

DATE:

09/03/09

CHECKED BY:

Suresh

DATE:

09/03/09

APPROVED BY:

Farnell

DATE:

23/03/09

DRAWING TITLE:

Slimine Plug-In PSU's - 9W/Fixed Voltage

SIZE
A

DWG NO.

M10001954

ELECTRONIC FILE
75377_DWGREV
A

SCALE: NTS

U.O.M.: mm

SHEET: 1 OF 4



PART NO.

9820 Series

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	Veena	09/03/09	Suresh	09/03/09	Farnell	23/03/09

Environmental Requirements:

Operating temperature : 0°C to 40°C.
Storage temperature : -25°C to +85°C.
Operating humidity : 30% to 95%.
Storage humidity : 30% to 98%.
Operating bar : 1bar.

Input Requirements:

Regular input voltage : 100V ac to 240V ac.
Variable input voltage range : 90V ac to 264V ac.
Rating frequency : 50Hz to 60Hz.
Frequency range : 47Hz to 63Hz.
Input current : 0.18Arms maximum (at regular voltage and current).

Introduction of AMP9820:

The SMPS operated at input regular voltage 100V ac to 240V ac.
The SMPS should be capable of a total continuous DC power output of 7.5 watts.
The SMPS should be capable of a total peak 10 watts.
The SMPS should be able to single output only.
The SMPS should not be fired or emitted smoke by protection when the circuit is short.
The SMPS should carried maximum power when the output circuit is short that the unit is really hot.

DC Insulation Resistance:

Input - output : 50MΩ minimum (at 500V dc).
Input - body metal : 50MΩ minimum (at 500V dc).

Dielectric Withstand - Voltage:

Input - output : 3750V ac minimum for (1 minute).
Input - body metal : 3750V ac minimum for (1 minute).

Main Fuse:

Input fuse is 10Ω, 1W fusible resistor.

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2009.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Veena

CHECKED BY:

Suresh

APPROVED BY:

Farnell

DATE:

09/03/09

DATE:

09/03/09

DATE:

23/03/09

DRAWING TITLE:**Slimine Plug-In PSU's - 9W/Fixed Voltage****SIZE**
A

DWG NO.

M10001954ELECTRONIC FILE
75377_DWGREV
A

SCALE: NTS

U.O.M.: mm

SHEET: 2 OF 4



PART NO.

9820 Series

REVISIONS


ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	Veena	09/03/09	Suresh	09/03/09	Farnell	23/03/09

Inrush Current:

Peak inrush current shall be limited to 10A for a cold start.

Time Sequence:

Time sequence should be satisfied to power ON/OFF.

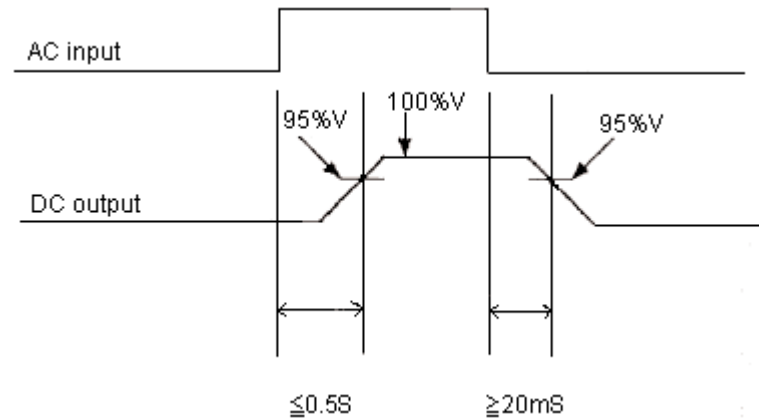AC switch at ON/OFF:**Efficiency:**

The efficiency of the SMPS must be satisfied the minimum 70%.

RFI Emission:

To meet EN55014.

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2009.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Veena

DATE:

09/03/09

CHECKED BY:

Suresh

09/03/09

APPROVED BY:

Farnell

23/03/09

DRAWING TITLE:**Slimine Plug-In PSU's - 9W/Fixed Voltage****SIZE**
A

DWG NO.

M10001954ELECTRONIC FILE
75377_DWGREV
A

SCALE: NTS

U.O.M.: mm

SHEET: 3 OF 4



PART NO.

9820 Series

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	Veena	09/03/09	Suresh	09/03/09	Farnell	23/03/09

Output Rated and Electrical Specifications

Rated Output (V)	5	6	7.5	9	12	15
Rated Current (A) at 240V	1.5	1.3	1.2	1	0.7	0.55
Rated Current (A) at 100V	1.1	1	0.9	0.8	0.6	0.45
Peak Load Current (A)	2		1.5		0.9	0.7
Short Output Current (A)	3					
Load Variable Range (A)	0 - 1.5	0 - 1.3	0 - 1.2	0 - 1	0 - 0.75	0 - 0.6
Maximum Output Voltage (V)	5.4	6.4	7.8	9.4	12.6	15.7
Minimum Output Voltage (V)	4.8	5.7	7.2	8.6	11.4	14.4
Ripple and Noise (mV)	35		50		80	100
Over Voltage Protection	No					
Over Heat Protection	Yes					
Rated Power (W)	7.5	7.8	9			
Peak Power (W)	10					
Switch Frequency (KHz)	130					
Insulation Class	II					
Consumes (W)	<0.2					

Part Number Table

Description	Part Number
Adaptor, Reg, 5V dc, 1.5A	9820-05-UK
Adaptor, Reg, 6V dc, 1.3A	9820-06-UK
Adaptor, Reg, 7.5V dc, 1.2A	9820-075-UK
Adaptor, Reg, 9V dc, 1A	9820-09-UK
Adaptor, Reg, 12V dc, 700mA	9820-12-UK
Adaptor, Reg, 15V dc, 550mA	9820-15-UK

<http://www.farnell.com><http://www.newark.com><http://www.cpc.co.uk>

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2009.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Veena

DATE:

09/03/09

CHECKED BY:

Suresh

DATE:

09/03/09

APPROVED BY:

Farnell

DATE:

23/03/09

DRAWING TITLE:

Slimine Plug-In PSU's - 9W/Fixed Voltage

SIZE
A

DWG NO.

M10001954

ELECTRONIC FILE
75377_DWGREV
A

SCALE: NTS

U.O.M.: mm

SHEET: 4 OF 4