



Charger Protection IC with Internal FET BD6040GUL

● Outline

The BD6040GUL charger protection IC developed for portable devices provides up to 28V of over voltage protection for charger ICs. Built-in circuits include overvoltage lockout, overcurrent limit, undervoltage protection, internal start up delay, and status flag.


● Features

- 1) 28V (max) overvoltage protection
- 2) Low quiescent current (45μA)
- 3) Low Ron (125mΩ) FET
- 4) Overvoltage lockout (OVLO) circuit
- 5) Undervoltage lockout (UVLO) circuit
- 6) Internal 2msec start up delay
- 7) Overcurrent protection circuit
- 8) Compact package: VCSP50L1 (1.6mm x 1.6mm, t=0.55mm)

● Applications

Mobile phones, MP3 players, digital cameras

● Dimensions (Unit:mm)

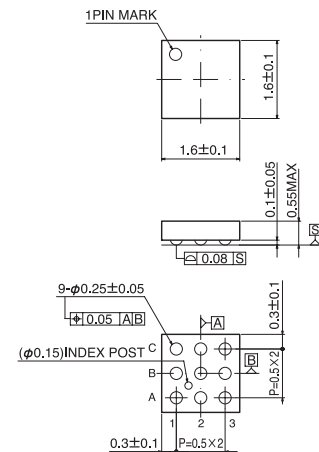

VCSP50L1

● Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit	Conditions
Input Supply Voltage 1	Vmax1	-0.3 to 30	V	IN
Input Supply Voltage 2	Vmax2	-0.3 to 7	V	other
Power Dissipation	Pd	725	mW	
Operating Temperature Range	Topr	-35 to +85	°C	
Storage Temperature Range	Tstr	-55 to +150	°C	

*1: Derated at 5.8mW/ 1°C at Ta greater than 25°C. When mounted on 50mm×58mm board.

- The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- The application circuit examples, information, and various data pertaining to the use of the products presented in this documentation are provided for reference purposes only.
- Please note that ROHM cannot bear any responsibility regarding any problems relating to industrial property rights resulting from their use thereof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Excellence in Electronics



ROHM CO., LTD.

21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: +81-75-311-2121 FAX: +81-75-315-0172
URL: <http://www.rohm.com>

Contact us for further information about the products.

Seoul TEL: +82-2-8182-700 FAX: +82-2-8182-715
Dalian TEL: +86-411-8230-8549 FAX: +86-411-8230-8537
Beijing TEL: +86-10-8525-2483 FAX: +86-10-8525-2489
Shanghai TEL: +86-21-6279-2727 FAX: +86-21-6247-2066
Shenzhen TEL: +86-755-8307-3008 FAX: +86-755-8307-3003
Hong Kong TEL: +852-2-740-6262 FAX: +852-2-375-8971
Taipei TEL: +886-2-2500-6956 FAX: +886-2-2503-2869
Shingapore TEL: +65-6332-2322 FAX: +65-6332-5662
Philippines TEL: +63-2807-6872 FAX: +63-2809-1422
Thailand TEL: +66-2-254-4890 FAX: +66-2-256-6334

Malaysia
Germany
France
United Kingdom
San Diego
Atlanta
Dallas
Kyoto
Yokohama

TEL: +60-3-7958-8355 FAX: +60-3-7958-8377
TEL: +49-2154-9210 FAX: +49-2154-921400
TEL: +33-1-5697-3060 FAX: +33-1-5697-3080
TEL: +44-1-908-306700 FAX: +44-1-908-235788
TEL: +1-858-625-3630 FAX: +1-858-625-3670
TEL: +1-770-754-5972 FAX: +1-770-754-0691
TEL: +1-469-287-5366 FAX: +1-469-362-7973
TEL: +81-75-365-1218 FAX: +81-75-365-1228
TEL: +81-45-476-2290 FAX: +81-45-476-2295

Current specifications in effect of 1st. October 2007.



• **Recommended Operating Range** (Ta=25°C unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Voltage Range	Vin	2.2	5	28	V

• **Electrical Characteristics** (Ta=25°C unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
ELECTRICAL						
Input Voltage Range	VIN	-	-	28	V	
Supply Quiescent Current	ICC	-	45	90	μA	
Undervoltage Lockout	UVLO	2.53	2.65	2.77	V	IN=decreasing
Undervoltage Lockout Hysteresis	UVLOh	50	100	150	mV	IN=increasing
Overvoltage Lockout	OVLO	6.2	6.4	6.6	V	IN=increasing
Overvoltage Lockout Hysteresis	OVLOh	10	30	50	mV	IN=decreasing
Current Limit	ILM	1.2	-	-	A	
Vin Vs. Vout Res.	RON	-	125	150	mΩ	
OK Output Low Voltage	OKVO	-	-	400	mV	SINK=1mA
OK Leakage Current	OKleak	-	-	1	μA	
EN Input Voltage (H)	ENH	1.45	-	-	V	
EN Input Voltage (L)	ENL	-	-	0.5	V	
EN Input Current	ENC	12	25	50	μA	EN=1.5V
TIMING						
Startup Delay	Ton	-	2	4	ms	
OK Rise Delay	Tok	-	10	15	ms	
Output Turn Off Time	Toff	-	2	10	μs	
Alert Delay	Tovp	-	1.5	10	μs	

* This product is not designed to resistant to radiation.

• **Block Diagram**

