



SAW Components

Data Sheet B7705, Pb-Free

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a bright, circular highlight in the center of each, giving them a three-dimensional appearance. They are set against a dark, textured background that includes a faint, stylized globe and a curved, metallic-looking structure that resembles a SAW component. The overall effect is high-tech and futuristic.



SAW Components

B7705

Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Features

- Low-loss RF filter for mobile telephone EGSM system, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- Excellent symmetry
- Impedance transformation from 50 Ω to 150 Ω
- Ceramic package for Surface Mounted Technology (SMT)
- Pb-free

Chip sized SAW package QCS5H

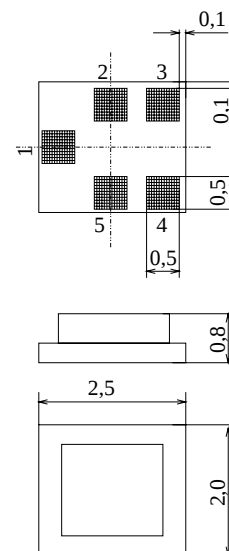


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,015 g

Pin configuration

- | | |
|------|-------------------|
| 1 | Input, unbalanced |
| 3, 4 | Output, balanced |
| 2, 5 | Case ground |

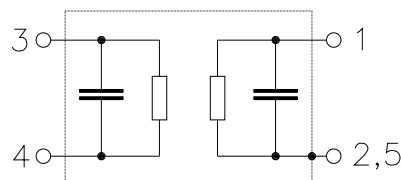

Type	Ordering code	Marking and Package according to	Packing according to
B7705	B39941-B7705-K910	C61157-A7-A71	F61074-V8104-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 25 / + 85	$^{\circ}\text{C}$	source impedance 50 Ω , load impedance 150 Ω ; CW input for min. 2000h
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3,5	V	
ESD voltage	V_{ESD}^*	100*	V	
Input power max.	P_{IN}		dBm	
880 ... 915 MHz		18		
925 ... 960 MHz		8		
1710 ... 1910 MHz		18		
1920 ... 1980 MHz		10		
2402 ... 2480 MHz		4		
elsewhere		0	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7705

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +25\text{ °C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 150\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	2,7	3,2	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	0,9	1,6	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,2	2,4	
Output VSWR					
925,0 ... 960,0 MHz		—	2,2	2,3	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
925,0 ... 960,0 MHz		-5	0	5	degree
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-0,5	0	0,5	dB
Attenuation	α				
0,0 ... 880,0 MHz		50	75	—	dB
880,0 ... 905,0 MHz		30	45	—	dB
905,0 ... 915,0 MHz		23	27	—	dB
980,0 ... 1050,0 MHz		23	26	—	dB
1050,0 ... 6000,0 MHz		50	60	—	dB



SAW Components

B7705

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10$ to $+80$ °C

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 150 \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	2,8	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,0	1,9	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,2	2,4	
Output VSWR					
925,0 ... 960,0 MHz		—	2,2	2,3	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
925,0 ... 960,0 MHz		-5	0	5	degree
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-0,5	0	0,5	dB
Attenuation	α				
0,0 ... 880,0 MHz		50	75	—	dB
880,0 ... 905,0 MHz		30	40	—	dB
905,0 ... 915,0 MHz		18	27	—	dB
980,0 ... 1050,0 MHz		23	25	—	dB
1050,0 ... 6000,0 MHz		50	60	—	dB



SAW Components

B7705

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20$ to $+80$ °C

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 150 \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	2,9	3,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,0	2,1	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,2	2,4	
Output VSWR					
925,0 ... 960,0 MHz		—	2,2	2,3	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
925,0 ... 960,0 MHz		-5	0	5	degree
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-0,5	0	0,5	dB
Attenuation	α				
0,0 ... 880,0 MHz		50	75	—	dB
880,0 ... 905,0 MHz		30	40	—	dB
905,0 ... 915,0 MHz		18	27	—	dB
980,0 ... 1050,0 MHz		22	25	—	dB
1050,0 ... 6000,0 MHz		50	60	—	dB



SAW Components

B7705

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -25$ to $+85$ °C

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 150 \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	3,5	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,5	2,4	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,2	2,5	
Output VSWR					
925,0 ... 960,0 MHz		—	2,2	2,4	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
925,0 ... 960,0 MHz		-5	0	5	degree
Output amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-0,5	0	0,5	dB
Attenuation	α				
0,0 ... 880,0 MHz		50	75	—	dB
880,0 ... 905,0 MHz		30	40	—	dB
905,0 ... 915,0 MHz		10	15	—	dB
980,0 ... 1050,0 MHz		21	23	—	dB
1050,0 ... 6000,0 MHz		50	60	—	dB



SAW Components

B7705


Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Transfer function

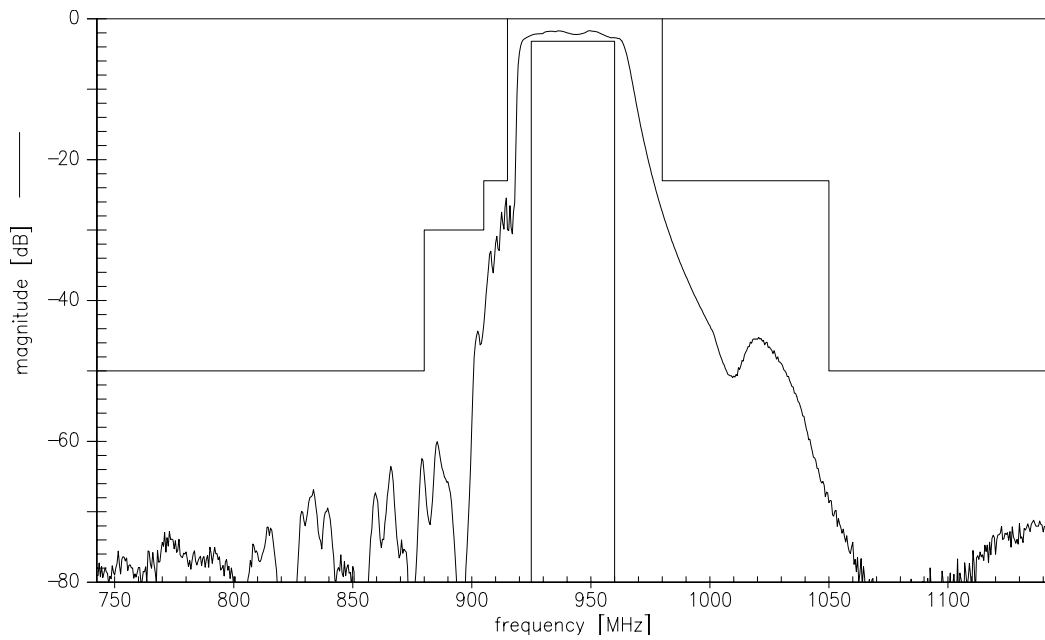

Transfer function (wideband)

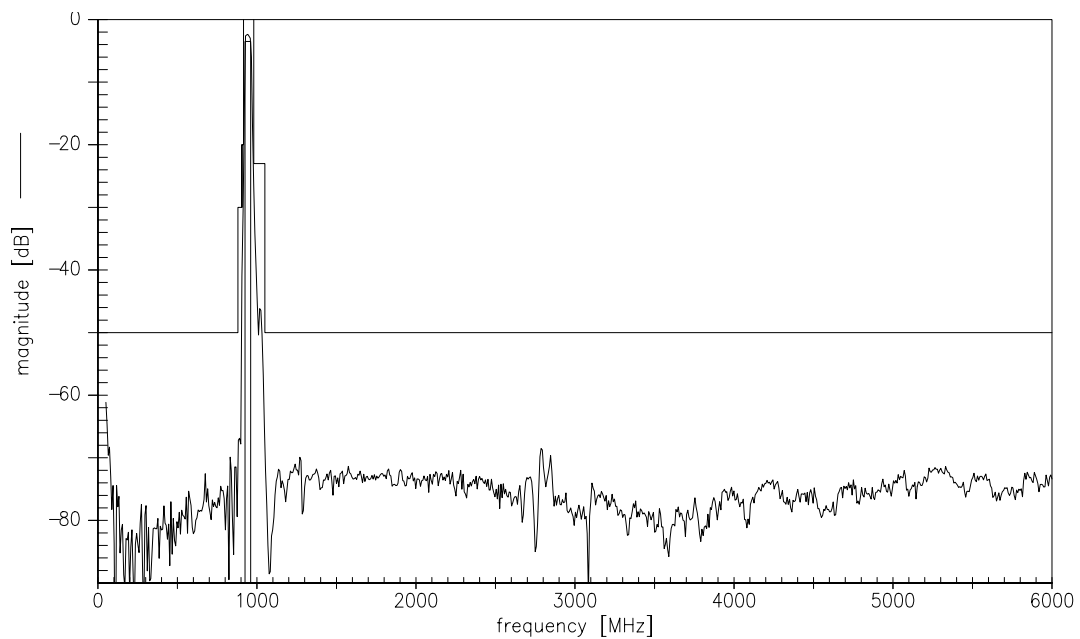



SAW Components

B7705


Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Output amplitude balance ($|S_{31}|/|S_{21}|$)

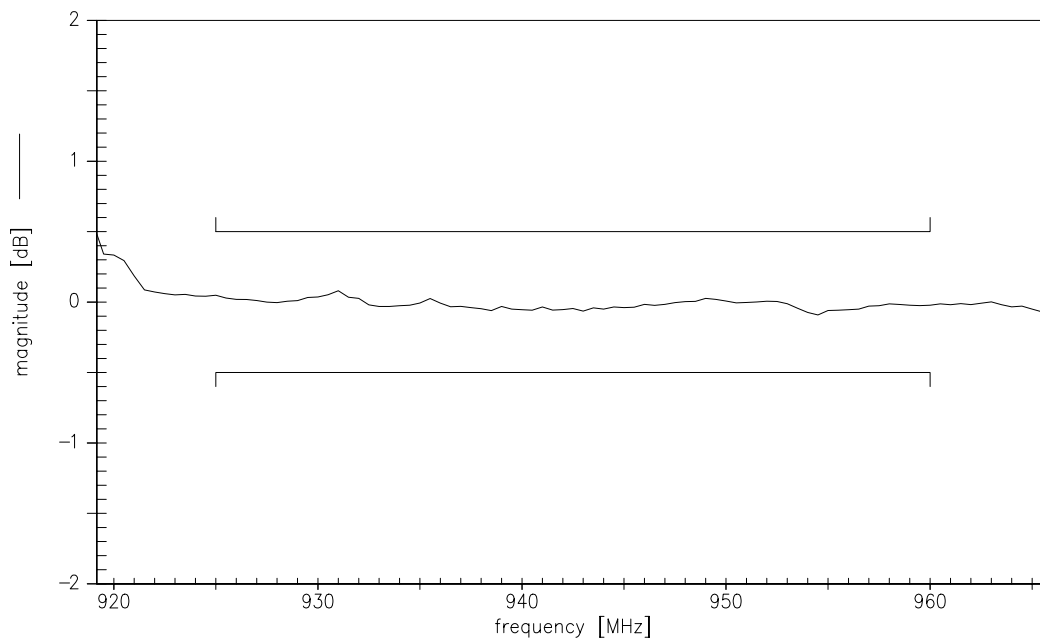

Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)

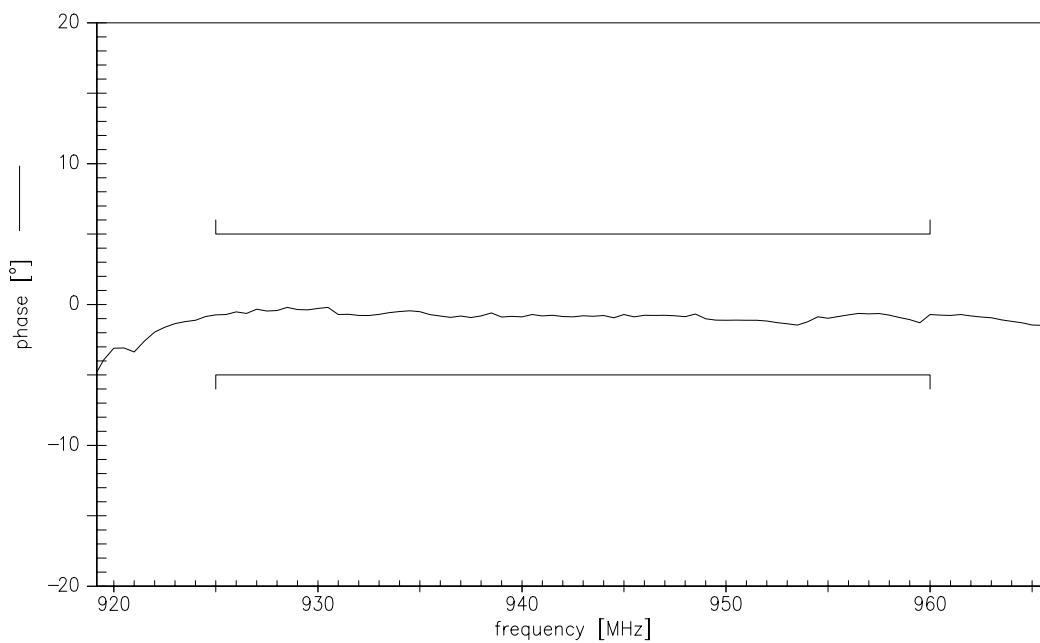



SAW Components	B7705
Low-Loss Filter for Mobile Communication	942,5 MHz
Data Sheet	SMD

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC PD
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2004. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.