

Low Cost High IP3 Mixer for **PCS/WLL Applications**

Rev. V3

Features

- LO & RF 10 TO 2800 MHz
- IF 10 TO 2000 MHz
- LO DRIVE +17 dBm (NOMINAL)
- SURFACE MOUNT
- HIGH INTERCEPT +27 dBm (TYP.)
- +260°C REFLOW COMPATIBLE


Description

The CSM2-17 is a double balanced mixer, designed for use in the high volume wireless applications. The design utilizes Schottky ring quad diodes and broadband baluns to attain excellent performance.

Ordering Information

Part Number	Package
CSM2-17	Surface Mount

Product Image

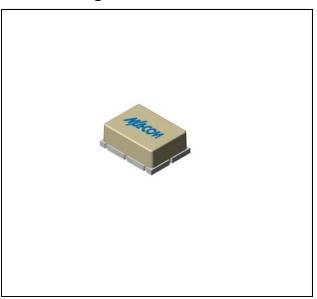

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +17 dBm (Downconverter application only)

Parameter Test Conditions		Units	Typical	Guaranteed	
				+25°C	-40° to +85°C
SSB Conversion Loss(max)	$fR = 10 \text{ to } 1200 \text{ MHz}, fL = 10 \text{ to } 1200 \text{ MHz}, fI = 10 \text{ to } 1000 \text{ MHz} \\ fR = 1200 \text{ to } 2800 \text{ MHz}, fL = 1200 \text{ to } 2800 \text{ MHz}, fI = 10 \text{ to } 1500 \text{ MHz} \\$	dB dB	7.5 8.5	8.5 9.5	9.0 10.0
SSB Noise Figure			Within 1 dB of conversion loss		
L - R Isolation (min)	fL = 10 to 1200 MHz fL = 1200 to 2800 MHz	dB dB	35 30	32 28	30 26
L - I Isolation (min)	fL = 10 to 2800 MHz	dB	27	23	21
R - I Isolation (min)	fR = 10 to 2800 MHz	dB	27		
1 dB Conversion Comp.	fL = +17 dBm	dBm	+14		
Input IP3	$fL = 10 \ to \ 2000 \ MHz, \ fI = 10 \ to \ 1000 \ MHz, \ fR = 10 \ to \ 2000 \ MHz \\ fL = 2000 \ to \ 2800 \ MHz, \ fI = 10 \ to \ 2000 \ MHz, \ fR = 2000 \ to \ 2800 \ MHz$	dBm dBm	+27 +23		
R-Port VSWR	fR = 10 to 2800 MHz		1.9:1		
L-Port VSWR	fL =10 to 1500 MHz fL = 1500 to 2000 MHz		2.0:1 2.75:1		
I-Port VSWR	fI = 10 to 1500 MHz		1.5:1		

Commitment to produce in volume is not guaranteed.

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

[•] China Tel: +86.21.2407.1588

[•] India Tel: +91.80.4155721 Visit www.macomtech.com for additional data sheets and product information.




Low Cost High IP3 Mixer for **PCS/WLL Applications**


Rev. V3

Typical Performance Curves


Conversion Loss vs. RF-Frequency

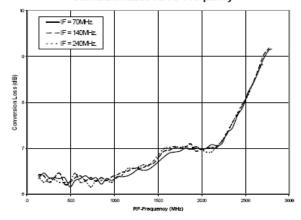

Isolation vs. Frequency

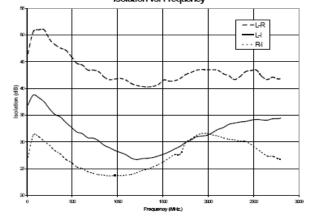



RF-Port VSWR vs. Frequency

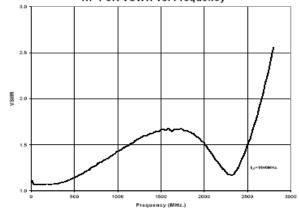


2

Third Order Input Intercept Point vs. RF-Frequency

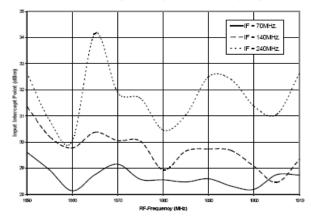

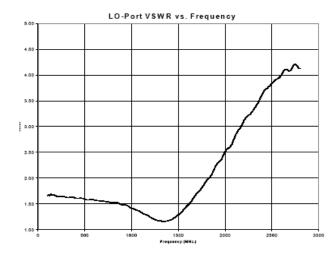

IF-Port VSWR vs. Frequency

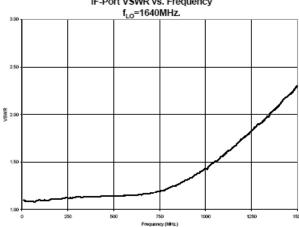

PRELIMINARY: Data Sheets contain information regarding a product IM/A-COM Technology
Solutions has under development. Performance is based on engineering tests. Specifications are
typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make
changes to the product(s) or information contained herein without notice.


- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.



Low Cost High IP3 Mixer for **PCS/WLL Applications**

Rev. V3

Outline Drawing: Surface Mount *

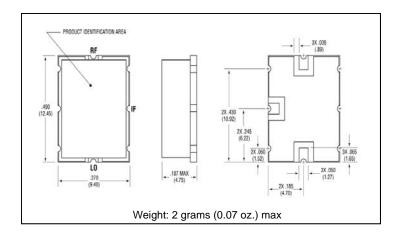

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

Absolute Maximum Ratings

Parameter	Absolute Maximum		
Operating Temperature	-40°C to +85°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+20 dBm max @ +25°C +17 dBm max @ +85°C		
Peak Input Current	50 mA DC		

Commitment to produce in volume is not guaranteed.

[•] India Tel: +91.80.4155721

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{M/A-COM Technology Solutions}}{\text{CSM2-17}}:$