




MICRO SWITCH
a Honeywell Division

SWITCH-ENCLOSED

CATALOG LISTING
1LS197

FED. MFG. CODE 81020

NO 4 O O NO 3
NC 1 O O NC 2
CIRCUIT DIAGRAM

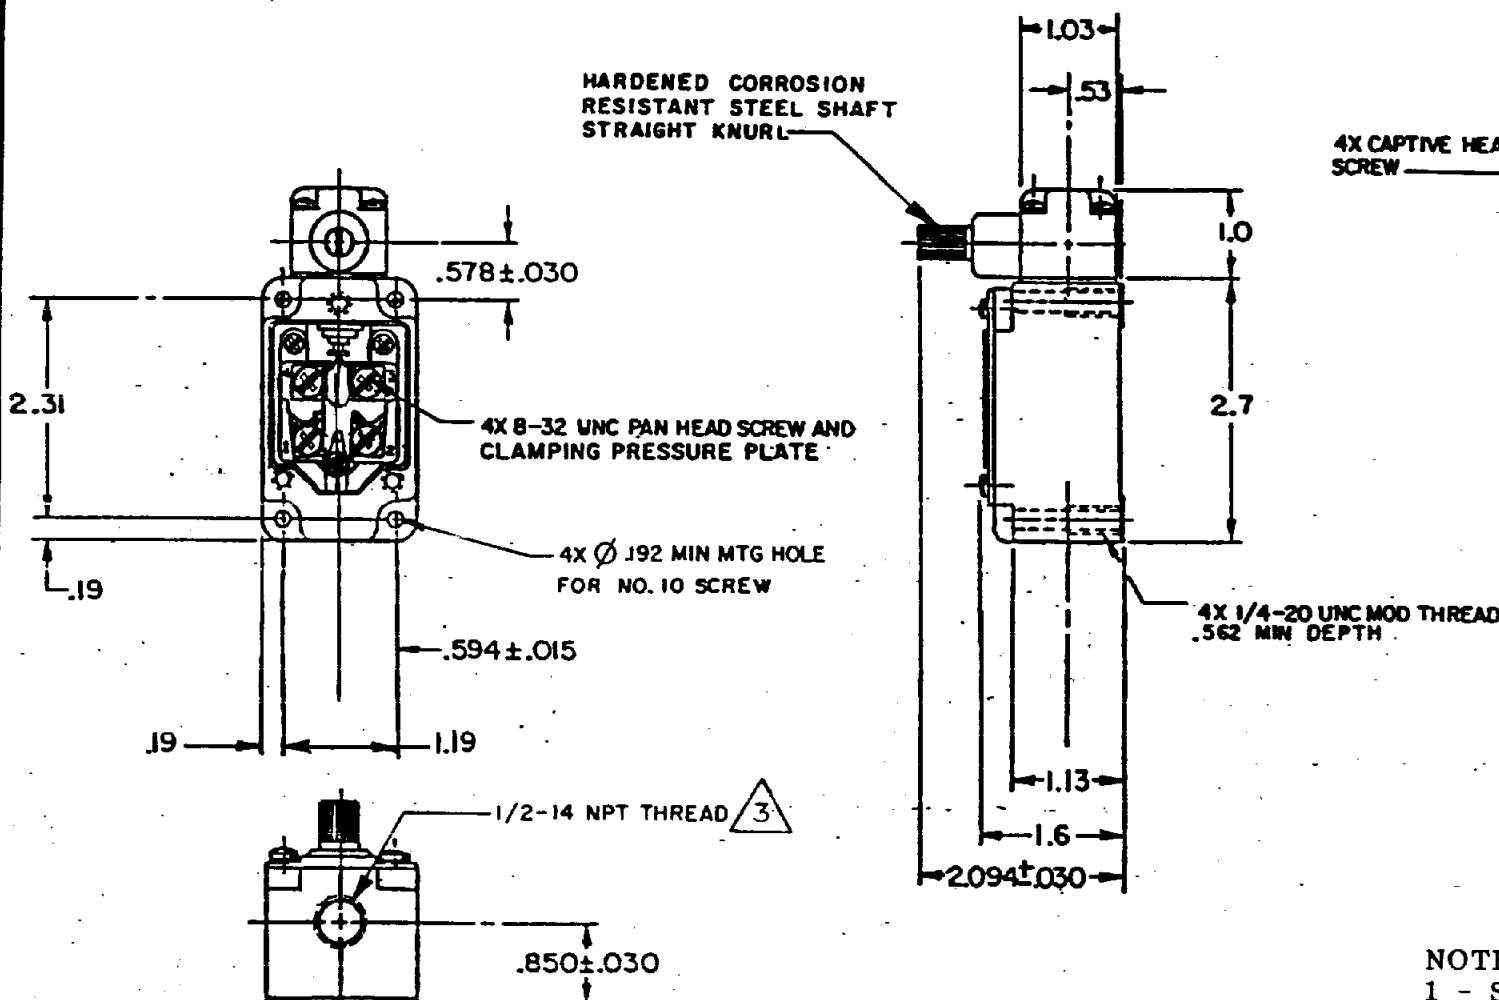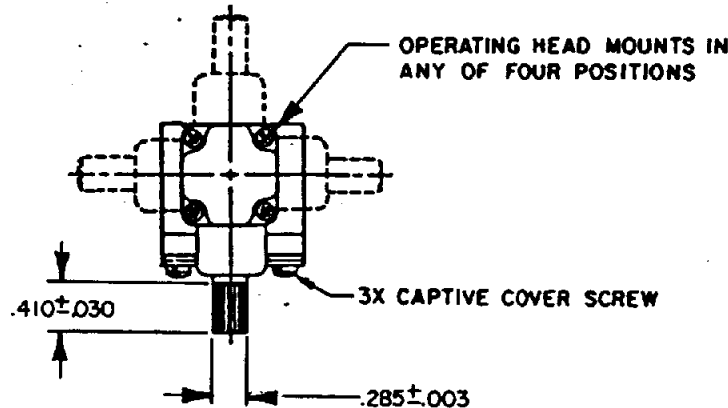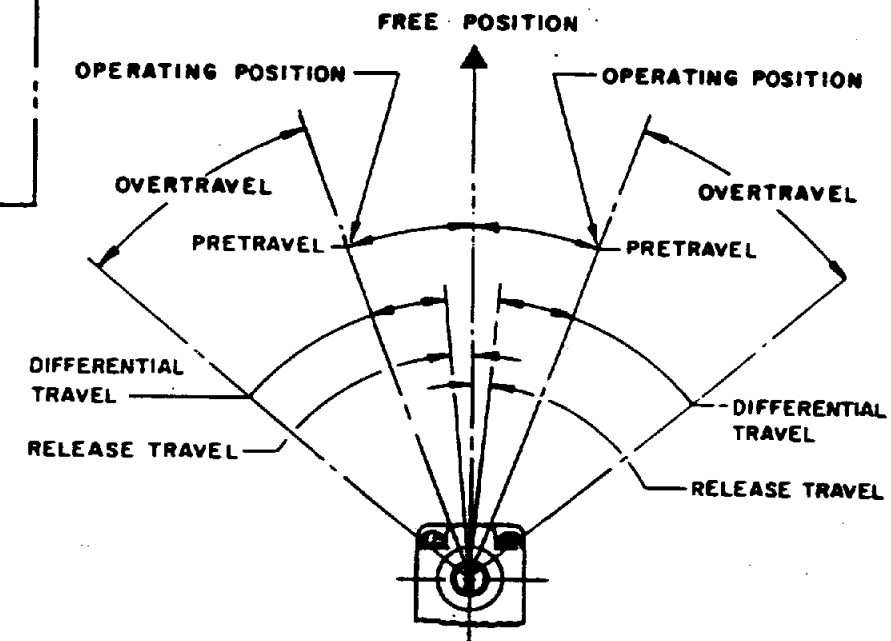

NOTES

- 1 - SWITCH IS ASSEMBLED FOR ACTUATION IN EITHER DIRECTION BUT MAY BE ADJUSTED TO ACTUATE THE SWITCH IN THE CLOCKWISE DIRECTION ONLY, THE COUNTERCLOCKWISE DIRECTION ONLY, OR IN BOTH DIRECTIONS
- 2 - TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

3 SEAL TO BE FURNISHED BY USER

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


CHARACTERISTICS

OPERATING TORQUE — 27 IN OZ MAX
RELEASE TORQUE — 3 IN OZ MAX
PRETRAVEL — 5° MAX
OVERTRAVEL — 30° MIN
RELEASE TRAVEL — 0° 30' MIN
SWITCH-BASIC REPLACEMENT — 2MNB

ELECTRICAL DATA

CONTACT ARRANGEMENT
(SEE CIRCUIT DIAGRAM)
10A-120, 240 OR 480 VAC
1/4 HP-120 VAC; 1/2 HP-240 VAC
PILOT DUTY: 600 VAC MAX

THIRD ANGLE PROJECTION



SCALE 1/2 : 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.01) ±.030
TWO PLACE (.001) ±.015
THREE PLACE (.0001) ±.005
ANGLES ±

WEIGHT

1LS197

M

DRAWING NUMBER

2

ISSUE

REVISIONS

A 77031
J D B
22 DEC 93

CHECK

CHECK

25 SEP 92

KAG

25 SEP 92

JAF

25 SEP 92