

FEATURES

- 7 pin, Package: "FS-01"
- ROSA (Receiver Optical Sub Assembly) for SC
- InGaAs-PIN with 3.3V pre-amplifier
- Differential output

APPLICATIONS

This PIN with preamplifier is intended to function as an optical receiver at 1,310nm or 1,550nm in SONET, SDH or other optical fiber systems operating up to 10.7Gb/s. The typical transimpedance (Z_t) value of $2,500\Omega$ optimizes the total bandwidth for 10Gb/s application. The detector preamplifier has an electrical differential output.



DESCRIPTION

The FRM5J141FS-01 incorporates a high bandwidth InGaAs PIN photo diode, a preamplifier in a hermetically sealed coaxial package. The PIN is processed with modern epitaxial techniques resulting in a reliable performance over a wide range of operating conditions.

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Ratings		Unit
		Min.	Max.	
Storage Temperature	T_{stg}	-40	+85	$^\circ\text{C}$
Operating Temperature	T_{op}	-5	70	$^\circ\text{C}$
Supply Voltage	V_{CC}	-0.5	4	V
PIN Reverse Voltage	V_{R}	0	+20	V
PIN Reverse Current	I_{R}	-	4(peak)	mA

OPTICAL & ELECTRICAL CHARACTERISTICS


(T_a=25°C, λ=1,550nm, V_{CC}=3.3V, V_R=5V, unless otherwise specified)

Parameter	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
PIN Responsivity	R13	λ = 1,310nm	0.7	0.9	-	A/W
	R15	λ = 1,550nm	0.7	0.9	-	
AC Transimpedance	Z _t	f = 750MHz, Single-end	2000	2500	-	Ω
Maximum Output Voltage Swing	V _{clip}	Saturated Output Voltage, Single-end	-	250	-	mV
Bandwidth	BW	-3dB from 750MHz	7.0	8.0	-	GHz
Output Return Loss	S22	130MHz to 5GHz	-	8	-	dB
Minimum Sensitivity	P _r	10Gb/s, NRZ, PRBS=2 ³¹ -1, B.E.R.=10 ⁻¹² , 25°C, Rext=13dB	-	(-19.0)	-17.0	dBm
		25°C, Rext=8.2dB	-	(-17.5)	-	
		25°C, Rext=6.0dB	-	(-16.0)	-	
		-5 to 70°C, Rext=13dB	-	(-18.0)	-16.0	
Maximum Overload	P _O	10Gb/s, NRZ, PRBS=2 ³¹ -1, B.E.R.=10 ⁻¹² , Rext=13dB, T _a =-5 to 70°C	0	(2.0)	-	dBm
Optical Return Loss	ORL	λ = 1,550nm	27	-	-	dB
		λ = 1,310nm	27	-	-	
Preamp Supply Current	I _{CC}	-	-	40	50	mA
Preamp Supply Voltage	V _{CC}	-	3.13	3.3	3.47	V
PIN Supply Voltage	V _R	-	4.5	5.0	12	V

Note 1: All the parameters are measured with 50Ω AC-coupled.

Note 2: Values in "()" are target values and based on evaluation results from small quantity samples.

Notes

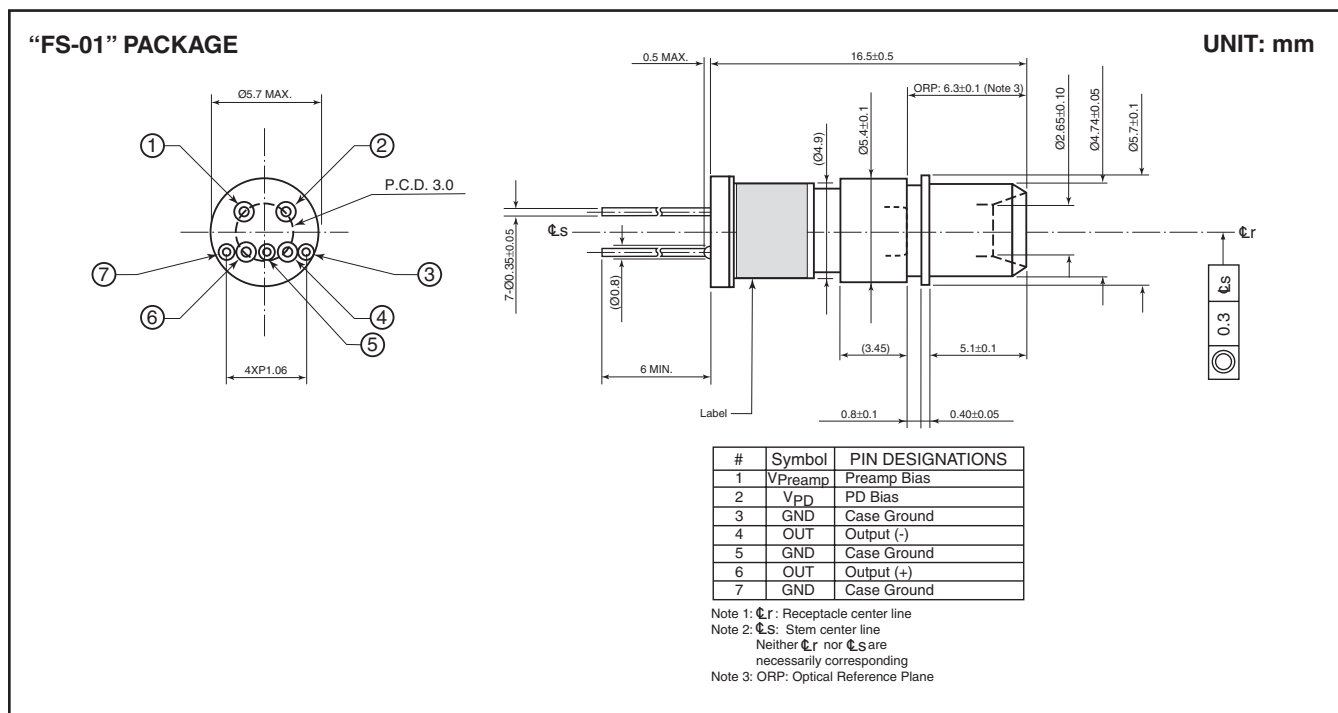

For further information please contact:

Eudyna Devices USA Inc.

2355 Zanker Rd.
 San Jose, CA 95131-1138, U.S.A.
 TEL: (408) 232-9500
 FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.

Network House
 Norreys Drive
 Maidenhead, Berkshire SL6 4FJ
 United Kingdom
 TEL: +44 (0) 1628 504800
 FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte Ltd.

Hong Kong Branch
 Rm. 1101, Ocean Centre, 5 Canton Rd.
 Tsim Sha Tsui, Kowloon, Hong Kong
 TEL: +852-2377-0227
 FAX: +852-2377-3921

Eudyna Devices Inc.

Sales Division
 1, Kanai-cho, Sakae-ku
 Yokohama, 244-0845, Japan
 TEL: +81-45-853-8156
 FAX: +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put this product into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
 Printed in U.S.A.