


EE-SPX74/84

Photomicrosensor with light modulation for reduced external light interference and a connector for easy maintenance.

- Built-in connectors
- Select from four easy-to-use shapes for efficient space utilization.
- Connectors with locks for safety against vibration.
- Convenient mounting method using M3 screws.
- Wide operating voltage range: 5 to 24 VDC

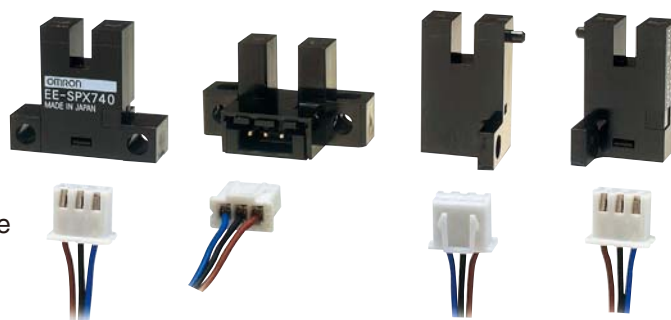

Be sure to read *Safety Precautions* on page 4.

Ordering Information

Sensors

Infrared light

Appearance	Sensing method	Sensing distance		Output type	Output configuration	Model
	Through-beam type (with slot)	 3.6 mm (slot width)	NPN output	Dark-ON	EE-SPX740	
				Light-ON	EE-SPX840	
				Dark-ON	EE-SPX742	
				Light-ON	EE-SPX842	
		 5 mm (slot width)		Dark-ON	EE-SPX743	
				Light-ON	EE-SPX843	
				Dark-ON	EE-SPX741	
				Light-ON	EE-SPX841	

Accessories (Order Separately)

Connector with Cable



Type	Cable length	Model
Connector	1 m	EE-1013

Ratings and Specifications


Item	Models	EE-SPX740, EE-SPX840 EE-SPX742, EE-SPX842 EE-SPX743, EE-SPX843	EE-SPX741 EE-SPX841
Sensing distance		3.6 mm (slot width)	5 mm (slot width)
Sensing object		Opaque: 1 × 0.5mm min.	Opaque: 2 × 0.8 mm min.
Differential distance		0.05 mm max.	
Light source		GaAs infrared LED (pulse lighting) with a peak wavelength of 940 nm	
Indicator *1		Light indicator (red)	
Supply voltage		5 to 24 VDC ±10%, ripple (p-p): 5% max.	
Current consumption		Average: 15 mA max.; Peak: 50 mA max.	
Control output		NPN voltage output: Load power supply voltage: 5 to 24 VDC Load current: 50 mA max. 50 mA load current with a residual voltage of 1.0 V max. 10 mA load current with a residual voltage of 0.4 V max.	
Response frequency *2		500 Hz min.	
Ambient illumination		3,000 lx max. with incandescent light or sunlight on the surface of the receiver	
Ambient temperature range		Operating: -10 to +55°C Storage: -25 to +65°C	
Ambient humidity range		Operating: 5% to 85% Storage: 5% to 95%	
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 h each in X, Y, and Z directions	
Shock resistance		Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions	
Enclosure rating		IEC IP50	
Connecting method		Special connector	
Weight		Approx. 2.4 g	
Material	Case	Polycarbonate	
	Holder		

*1. The indicator is a GaAlAs red LED (peak wavelength: 660 nm).


*2. The response frequency was measured by detecting the following rotating disk.



EE-SPX741/841



EE-SPX742/842
EE-SPX743/843



EE-SPX740/840

I/O Circuit Diagrams

NPN Output

Model	Output configuration	Timing charts	Output circuit
EE-SPX740 EE-SPX741 EE-SPX742 EE-SPX743	Dark-ON		
EE-SPX840 EE-SPX841 EE-SPX842 EE-SPX843	Light-ON		* Voltage output (when the sensor is connected to a transistor circuit)

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

WARNING
This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.


Precautions for Correct Use

Make sure that this product is used within the rated ambient environment conditions.

● Design


Cable Extension

- When extending the cable, use an extension cable with conductors having a total cross-section area of 0.15 mm². The total cable length must be 4 m maximum.
- To use a cable length longer than 4 m, attach a capacitor with a capacitance of approximately 10 μF to the wires as shown below. The distance between the terminal and the capacitor must be within 4 m. (Use a capacitor with a dielectric strength that is at least twice the Sensor's power supply voltage.)

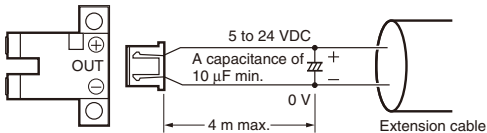

Effects of Inductive Noise


When there is inductive noise in the Sensor mounting frame (metal), the output of the Sensor may be affected. In this case, ensure that there is no electrical potential difference between the Sensor 0-V terminal and the Sensor mounting frame, or attach a 0.47 μF capacitor between the 0-V terminal and the frame.



Dimensions

Sensors


EE-SPX740
EE-SPX840

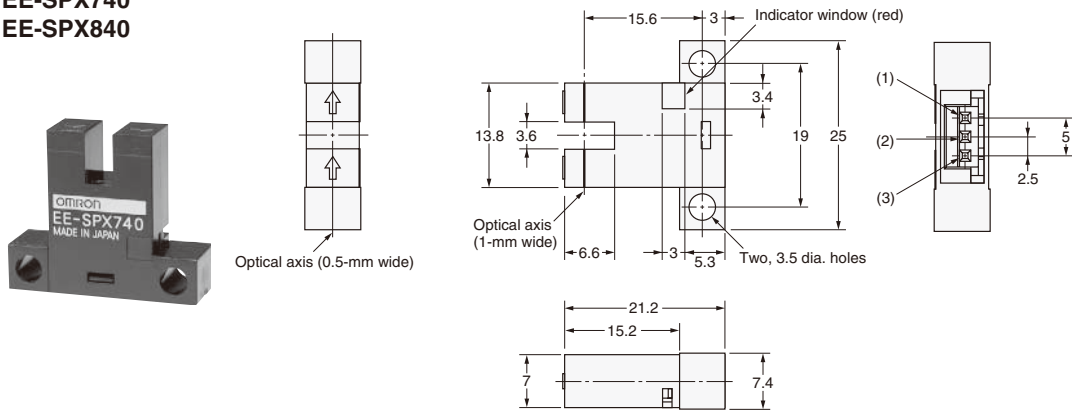

Terminal Arrangement

(1)	–	GND(0 V)
(2)	OUT	OUTPUT
(3)	+	Vcc


EE-SPX742
EE-SPX842

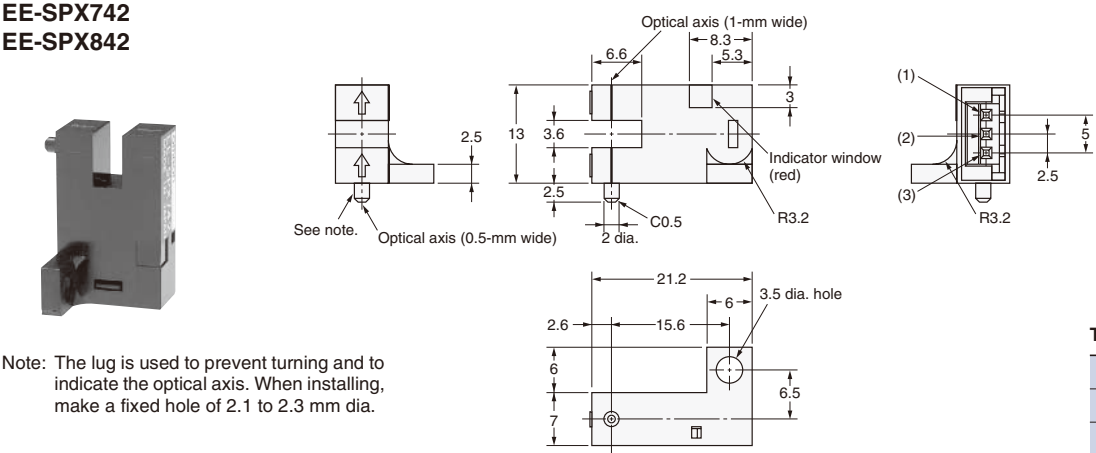

Terminal Arrangement

(1)	–	GND(0 V)
(2)	OUT	OUTPUT
(3)	+	Vcc


EE-SPX743
EE-SPX843

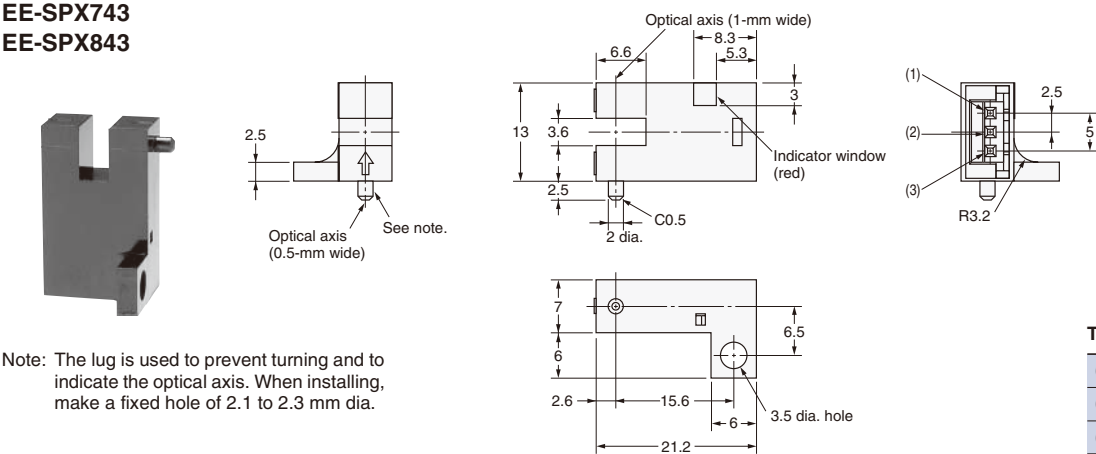

Terminal Arrangement

(1)	–	GND(0 V)
(2)	OUT	OUTPUT
(3)	+	Vcc


EE-SPX741
EE-SPX841

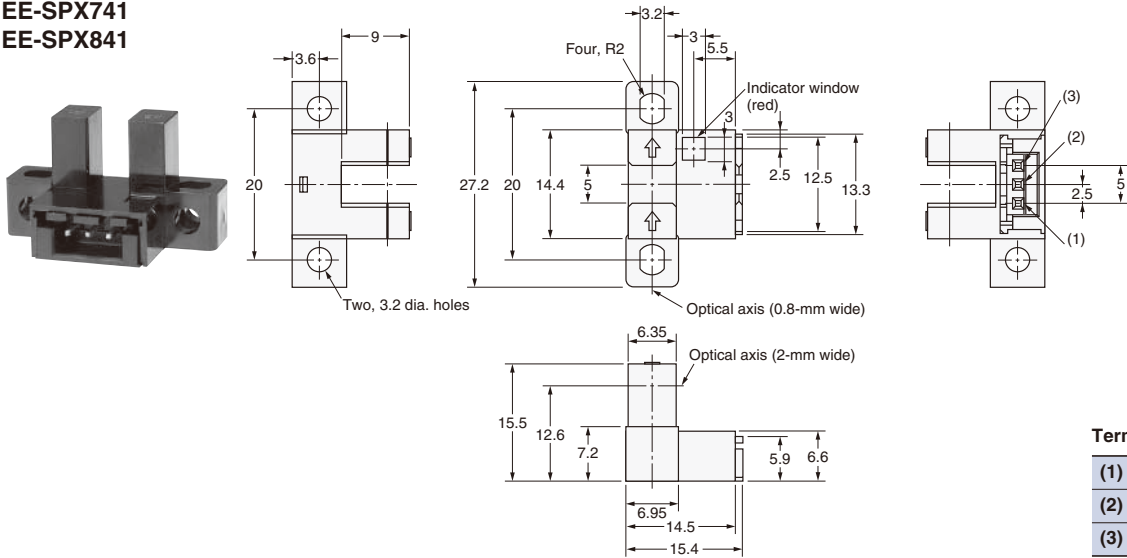

Terminal Arrangement		
(1)	—	GND (0 V)
(2)	OUT	OUTPUT
(3)	+	Vcc

Accessories (Connector with Cable)

EE-1013

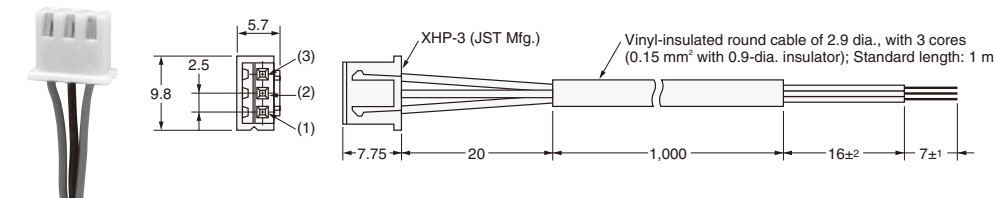

Terminal Arrangement		
(1)	Blue	GND (0 V)
(2)	Black	OUTPUT
(3)	Brown	Vcc