

TOSHIBA TRANSISTOR SILICON NPN TRIPLE DIFFUSED TYPE

2SD633, 2SD635


HIGH POWER SWITCHING APPLICATIONS
HAMMER DRIVE, PULSE MOTOR DRIVE APPLICATIONS

INDUSTRIAL APPLICATIONS
Unit in mm

- High DC Current Gain : $h_{FE}=2000$ (Min.)
- Low Saturation Voltage : $V_{CE(sat)}=1.5V$ (Max.)
- Complementary to 2SB673 and 2SB675.


MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	2SD633	V_{CBO}	100	V
	2SD635		60	
Collector-Emitter Voltage	2SD633	V_{CEO}	100	V
	2SD635		60	
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current		I_C	7	A
		I_{CP}		
Base Current		I_B	0.7	A
Collector Power Dissipation ($T_c=25^{\circ}C$)		P_C	40	W
Junction Temperature		T_j	150	$^{\circ}C$
Storage Temperature Range		T_{stg}	$-55\sim 150$	$^{\circ}C$

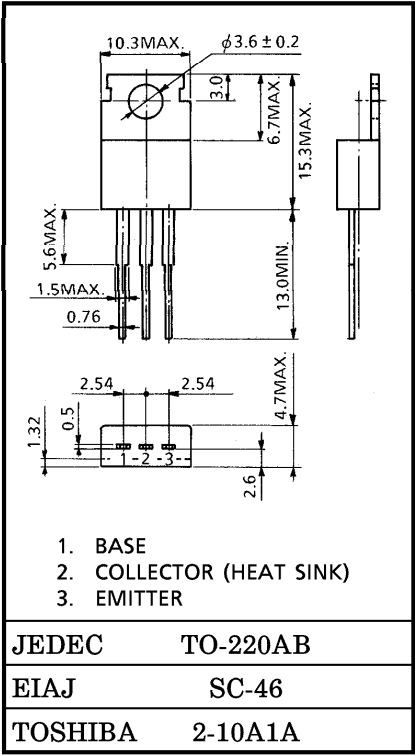




Weight : 1.9g (Typ.)
Mounting kit No. AC75







EQUIVALENT CIRCUIT

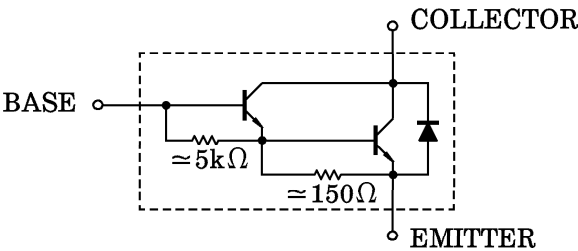

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

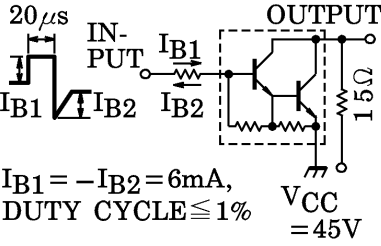CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	2SD633	ICBO	V _{CB} = 100V, I _E = 0	—	—	100	μA
	2SD635		V _{CB} = 60V, I _E = 0	—	—	100	
Emitter Cut-off Current		I _{EBO}	V _{EB} = 5V, I _C = 0	—	—	3.0	mA
Collector-Emitter Breakdown Voltage	2SD633	V _(BR) CEO	I _C = 50mA, I _B = 0	100	—	—	V
	2SD635			60	—	—	
DC Current Gain		h _{FE} (1)	V _{CE} = 3V, I _C = 3A	2000	—	15000	
		h _{FE} (2)	V _{CE} = 3V, I _C = 7A	1000	—	—	
Collector-Emitter Saturation Voltage	V _{CE} (sat) (1)		I _C = 3A, I _B = 6mA	—	0.9	1.5	V
	V _{CE} (sat) (2)		I _C = 7A, I _B = 14mA	—	1.2	2.0	
Base-Emitter Saturation Voltage		V _{BE} (sat)	I _C = 3A, I _B = 6mA	—	1.5	2.5	V
Switching Time	Turn-on Time	t _{on}		—	0.8	—	μs
	Storage Time	t _{stg}		—	3.0	—	
	Fall Time	t _f		—	2.5	—	

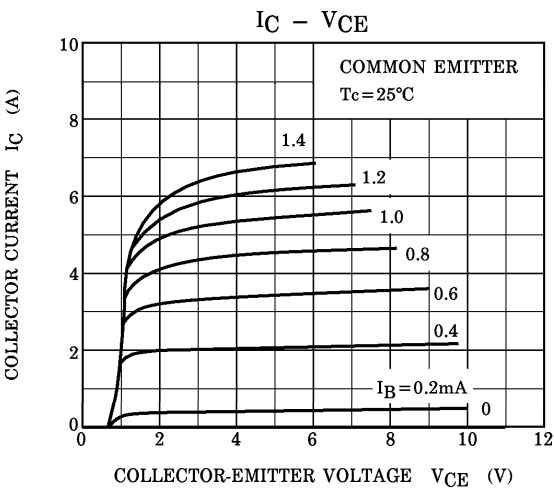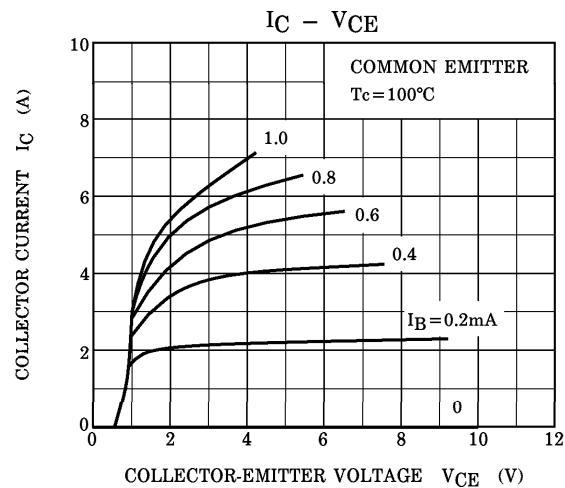

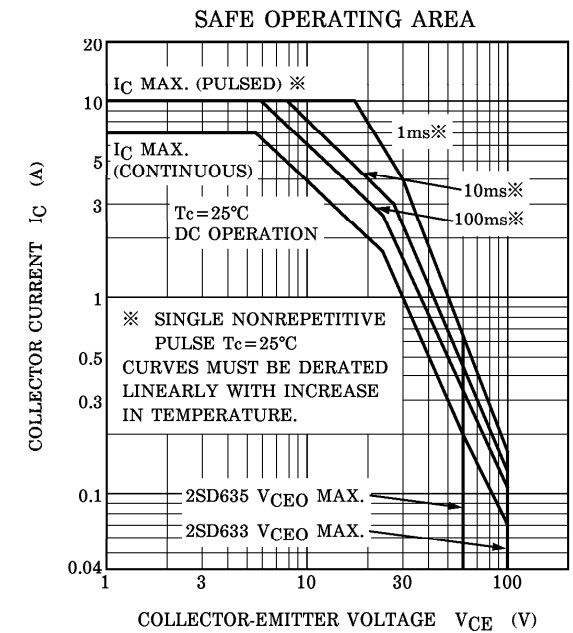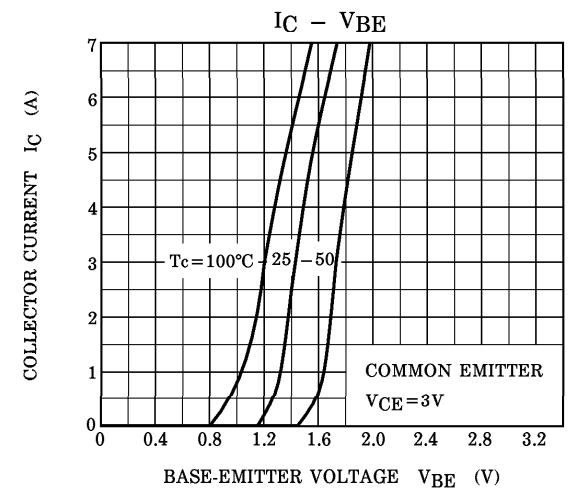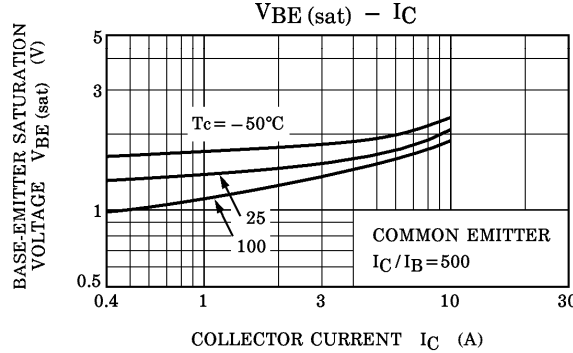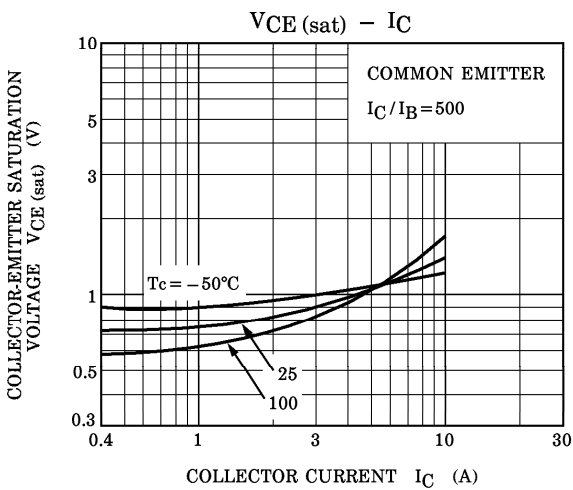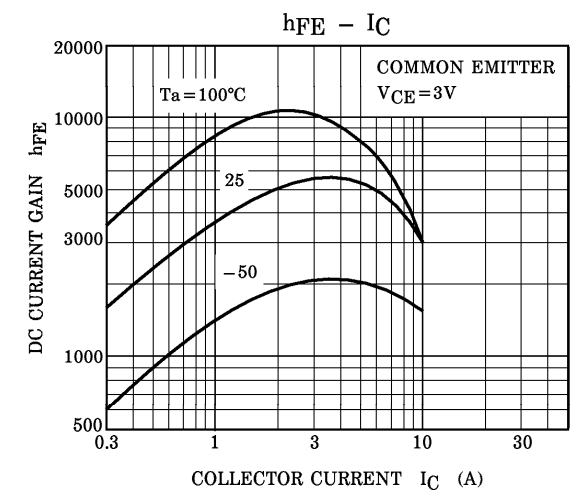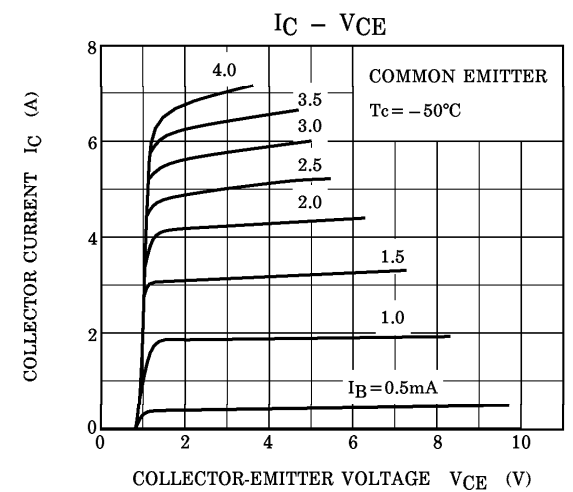

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.