

MICRO-AMP® System


MA4-2 One-Shot Logic Module




MICRO-AMP® module MA4-2 is a plug-in one-shot logic module with adjustable pulse length. It is designed as a way to easily add one-shot timing to a MICRO-AMP system which uses an MA3 or MA3-4 amplifier. It may also be used to add a one-shot timer to any current sinking DC device or to a system which offers a contact closure output. The MA4-2 is a perfect add-on to any Banner dc system, including dc models of OMNI-BEAM, MULTI-BEAM, MAXI-BEAM, VALU-BEAM, MINI-BEAM, ECONO-BEAM, Q08, Q19, Q25, S18, SM30, and SM512 Series self-contained sensors.

A low-going logic INPUT signal at pin #7 of the module activates a one-shot output at both pins #5 and #6, unless a low-going logic INHIBIT signal is present at pin #8 *when the input occurs*. Both NORMALLY OPEN (pin #6) and NORMALLY CLOSED (pin #5) outputs are available. Both are NPN open-collector (current sinking) transistors, each capable of switching up to 150 milliamps.

Three pulse duration time ranges are selectable. The 0.001 to 0.1 second range is standard, and 0.01 to 1 second and 1 to 15 second ranges are selected by connecting the appropriate module pin to pin #3 (dc common). The MA4-2 is a retriggerable-type one-shot, but may easily be programmed to the non-retriggerable mode by connecting pin #6 (N/O output) to pin #8 (INHIBIT input).

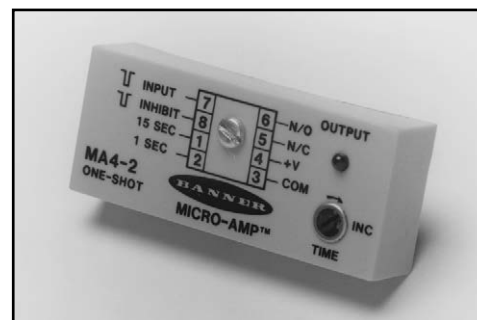

One-shot logic, MA4-2:



MICRO-AMP MA4-2 Specifications

SUPPLY VOLTAGE: 10 to 30V dc at less than 20 milliamps (exclusive of load); 10% maximum ripple.

INPUTS: INPUT and INHIBIT both respond to a logic "low" signal (less than 2V dc). A logic "high" is at least 6V dc or an open circuit. Inputs must be capable of sinking at least 4 milliamps. Inputs may be derived from limit switches or from dc sensors with NPN (current sinking) output transistors.

RESPONSE SPEED: INPUT and INHIBIT will respond to a low signal or high signal of 1 millisecond duration or longer.

OUTPUT CONFIGURATION: two open-collector NPN transistors with complementary outputs (one normally open, one normally closed). Maximum sinking current 150 milliamps, each output. Saturation voltage less than 0.5V dc at 10 milliamps. Off-state leakage current less than 1 microamp.

PULSE DURATION: standard range is .001 to .1 second. Programmable ranges are .01 to 1 second and 1 to 15 seconds. Select the .01 to 1 second range by connecting pin #2 to pin #3. Select the 1 to 15 second range by connecting #1 to #3.


TIMING ADJUSTMENT: single-turn timing potentiometer allows adjustment of pulse duration within the selected range (use small flat-bladed screw-driver).

INDICATOR: red LED indicator on the top of the module lights whenever the N/O output is conducting (i.e. when the N/O output is closed and the N/C output is open).

CONSTRUCTION: totally encapsulated plug-in package with molded VALOX® housing. Gold-flashed connection pins.


OPERATING TEMPERATURE:
0 to 70 degrees C (32 to 158 degrees F).

Functional Schematic, MA4-2 ONE-SHOT Module

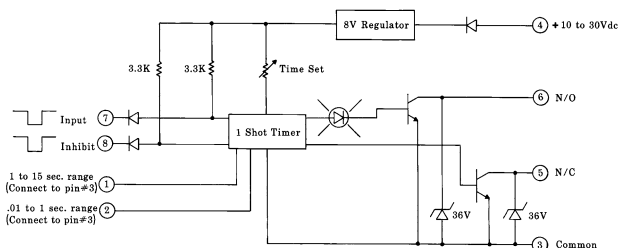


There are two types of basic "one-shots": RETRIGGERABLE and NON-RETRIGGERABLE. The output pulse timing of a retriggerable one-shot is re-started with the reoccurrence of every input. The output will remain "on" as long as the time between consecutive inputs is shorter than the one-shot pulse time (see timing diagram, below).

Retriggerable one-shot logic:

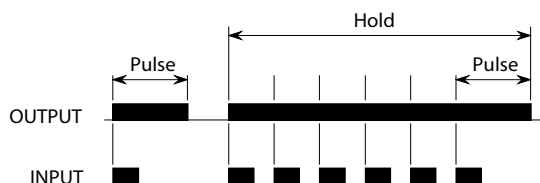


Hookup Diagram, MA4-2 ONE-SHOT Module

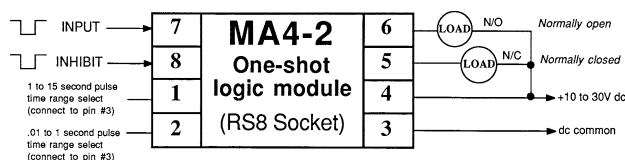

A non-retriggerable one-shot timer must complete a pulse before it will accept any new input signals. Non-retriggerable one-shots sometimes offer an advantage in indexing or registration control applications where multiple input signals are possible during advance of the product. The MA4-2 may be programmed for the non-retriggerable mode by connecting pin #6 to pin #8.

Non-retriggerable one-shot logic:

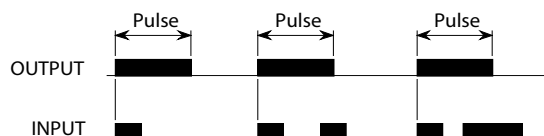

MICRO-AMP® Accessories

Sockets


RS8

The RS8 socket is the most frequently used means of mounting and wiring a MICRO-AMP module. It consists of a socket with two four-terminal connection strips, all wired together onto a PC board. The PC board assembly slides into a 1 inch (25mm) long PVC track which is used to mount the entire assembly. A hold-down screw keys the correct polarity of the module.




RS8K

The RS8K is a kit of parts which comprise the socket portion of the RS8 assembly. It is used to provide a socket for MICRO-AMP modules that are installed onto printed circuit boards. The RS8K consists of a molded socket block and 8 individual socket pins. A nylon screw is included to affix the socket block to the PC board. The drill size for the pins is #50 (.070"; 1,8mm). Drill pattern dimensions are included with the RS8K.

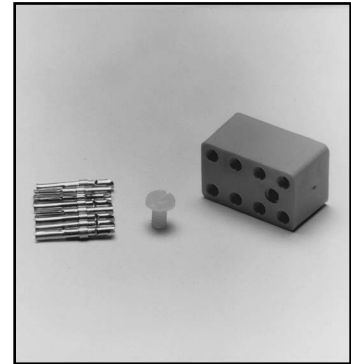

Mounting Track

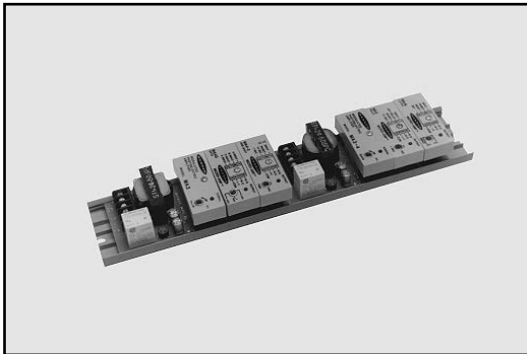


- TR100-1** 1 inch (25mm) long (supplied with RS8 socket)
- TR100-4** 4 inch (100mm) long (supplied with MPS-15 series power supply)
- TR100-6** 6 inch (150mm) long
- TR100-12** 12 inch (300mm) long

PVC mounting track for MICRO-AMP components is available in 6 and 12 inch lengths for systems which use multiple components. For example, a 6-inch length will accommodate one MPS-15 power supply plus two additional RS8 sockets with modules.

Longer lengths of mounting track may be supplied on a quote basis.

Dimensions, TR-100 Mounting Track

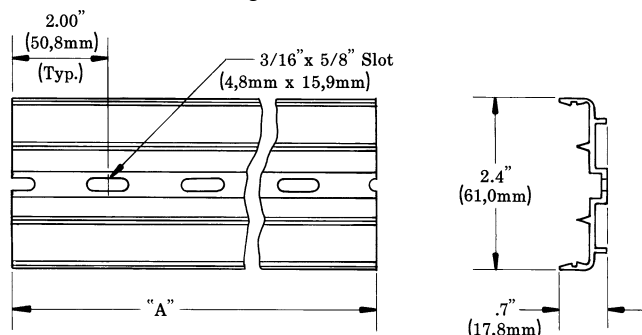

Track Model	"A" Dimension	Min. Number of Slots
TR100-1	1" (25 mm)	1
TR100-4	4" (100 mm)	2
TR100-6	6" (150 mm)	3
TR100-12	12" (300 mm)	8



WARNING MICRO-AMP® Systems do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor or module failure or malfunction can result in *either* an energized or a de-energized sensor output condition.

Never use this product as a sensing device for personnel protection. Its use as a safety device may create an unsafe condition which could lead to serious injury or death.

Only MACHINE-GUARD and PERIMETER-GUARD Systems, and other systems so designated, are designed to meet OSHA and ANSI machine safety standards for point-of-operation guarding devices. No other Banner sensors or controls are designed to meet these standards, and they must NOT be used as sensing devices for personnel protection.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp.