



Main

Range of product	Harmony
Product or component type	Wireless and batteryless transmitter
Device short name	XB5R
Bezel material	Plastic

Complementary


CAD overall height	144 mm
CAD overall width	56 mm
CAD overall depth	38 mm
Product weight	0.15 kg
Pulling force	1000 N (maximum) >= 45 N (activating)
Mechanical robustness	Free fall resistance (test level: 1000 mm) conforming to EN/IEC 60068-2-32
Standards	EN/IEC 60947-1 EN/IEC 60947-5-1 UL 508 CSA C22.2 No 14
Radio agreement	SRRC RSS ICASA FCC ARIB T66 ANATEL
Communication port protocol	Zigbee (green power) at 2.4 GHz
Maximum sensing distance	300 m transmitter in box type XAL D, receiver in metal enclosure and use re-lay-antenna 25 m transmitter in a plastic box type XAL D and receiver in a metal enclosure 100 m in free field
Acquisition time	2 ms
Response time	< 2 ms
Emission power	3 mW
Fixing mode	By screw, nominal torque: 2 N.m (tolerance: +/- 0.2 N.m)
Mounting mode	Panel-mounted Between 2 ropes
Operating position	Any position

Environment


Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Relative humidity	95 % at 70 °C without condensation
IP degree of protection	IP66 on outdoor conforming to IEC 60529
NEMA degree of protection	NEMA 4X for outdoor installation
IK degree of protection	IK05 conforming to IEC 50102
Mechanical durability	1000000 cycles

Shock resistance	25 gn (duration = 6 ms) for 6000 shocks conforming to IEC 60068-2-27 50 gn for 11 ms half sine wave acceleration conforming to IEC 60068-2-27 30 gn for 18 ms half sine wave acceleration conforming to IEC 60068-2-27
Vibration resistance	+/- 10 mm (f= 2...11 Hz) conforming to IEC 60068-2-6 5 gn (f= 11...500 Hz) conforming to IEC 60068-2-6
Electromagnetic compatibility	Radiated emission Susceptibility to electromagnetic fields (test level:3 V/m - 80...2700 MHz, distance = 20 m) Susceptibility to electromagnetic fields (test level:10 V/m - 80...2000 MHz) Electrostatic discharge immunity test (test level:6 kV - on contact (on metal parts)) Electrostatic discharge immunity test (test level:8 kV - in free air (in insulating parts)) Immunity for industrial environments
Product certifications	CCC CSA C-Tick GOST UL BT 2006/95/EC EMC directive 2004/108/EC R&TTE directive 1999/5/EC

Wireless and Batteryless Rope Pull Switch Transmitter

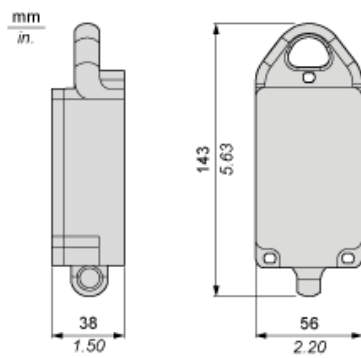


Transmitter Mounting

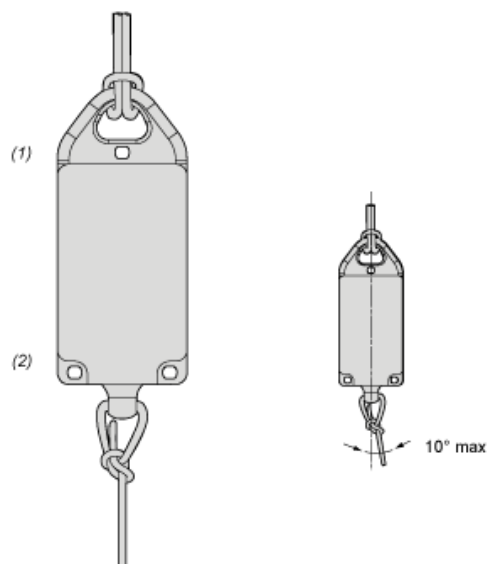

- (1) HIGH
- (2) BOTTOM

Transmitter Mounting on Flat Surface

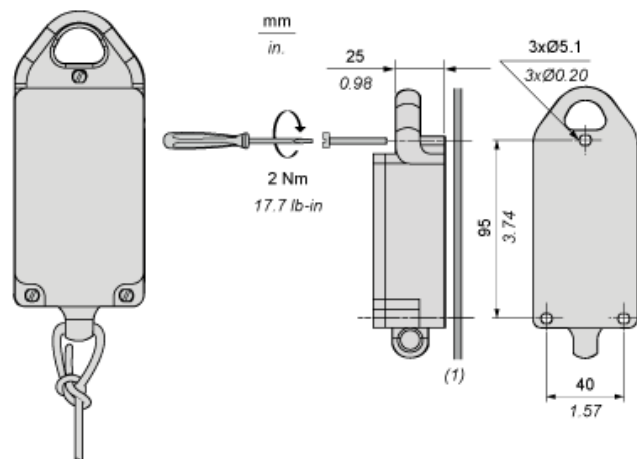

- (1) Installation on flat surface