LOC	DIST
CE	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-14-011637	14AUG2014	HZ	RZ

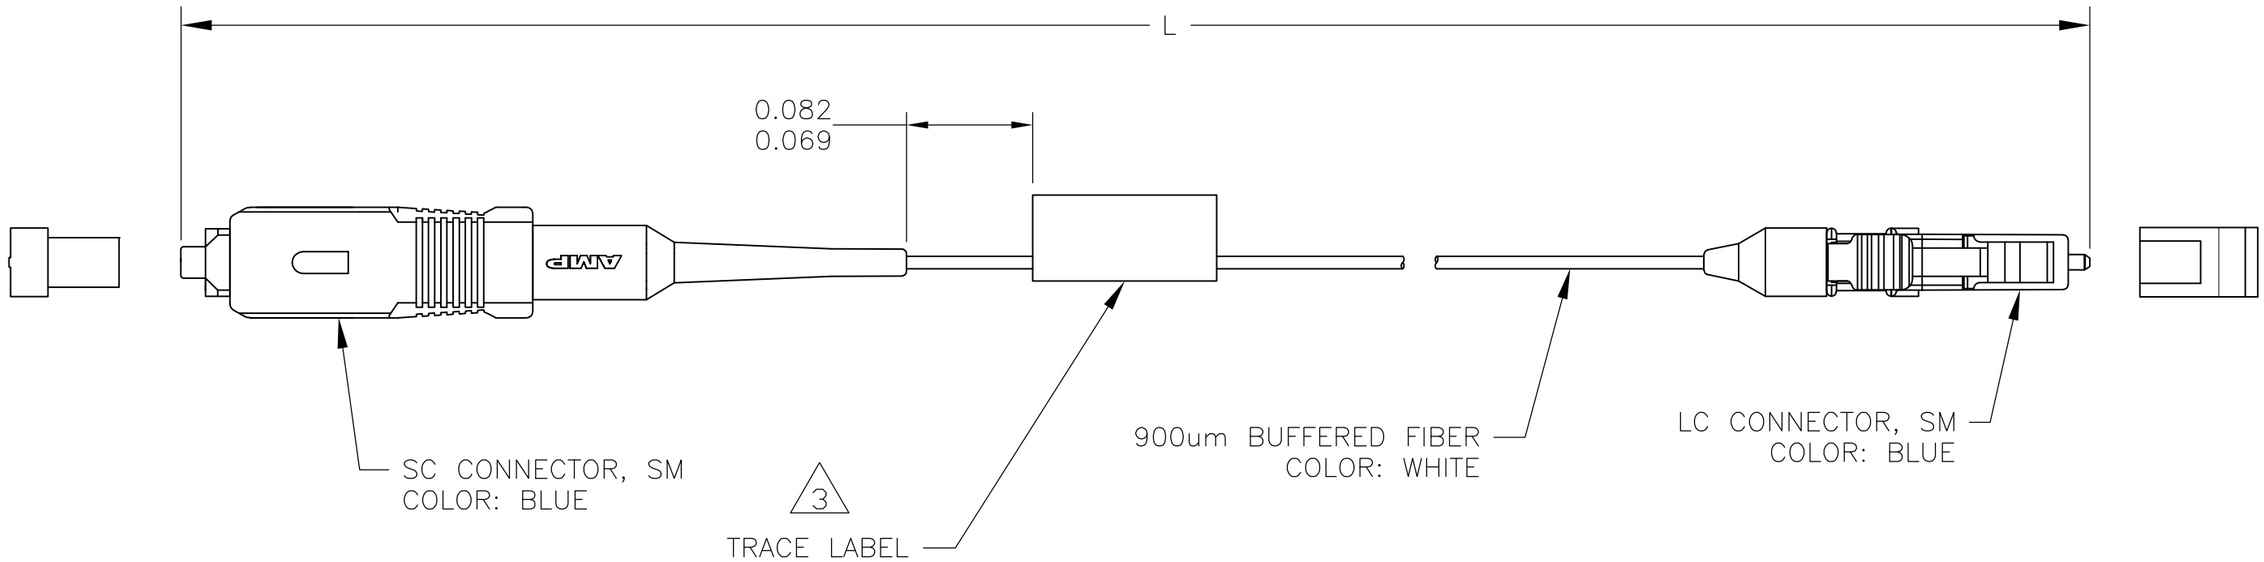

1. MAXIMUM INSERTION LOSS AT 1310nm:
   0.5 dB SC
   0.2 dB LC

2 MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.

3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702

MAX IL (dB) SC 1	MAX IL (dB) LC 1	L METERS [INCHES]	PART NUMBER
0.50	0.20	5.00±0.08 [196.8±3.0]	2064845-5
0.50	0.20	4.00±0.05 [157.5±3.0]	2064845-4
0.50	0.20	3.00±0.05 [118.1±2.0]	2064845-3
0.50	0.20	2.00±0.05 [78.7±2.0]	2064845-2
0.50	0.20	1.00±0.05 [39.4±2.0]	2064845-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	B.BRIGGS	07MAY2010
CHK	J.DUNCAN	07MAY2010
APVD	J.DUNCAN	07MAY2010
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	–	

TE Connectivity

NAME
CABLE ASSY, FIBER OPTIC, 900um, SM.
SC TO LC
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2064845	—

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	B