


TD62708NG

8CH HIGH CURRENT SOURCE DRIVER

The TD62708NG is comprised of eight source current output stages and $\overline{\text{ENABLE}}$ inputs which can gate the outputs. TD62708N features a large output source current of 1.8 A and minimized output voltage change vs output current change. These features make the device optimum for driving the matrix of ink jet printer print heads, LEDs, and the scan side of resistor matrixes.

Before using this device, note the thermal conditions for usage. This devices are a product for the Pb free(Sn-Ag).

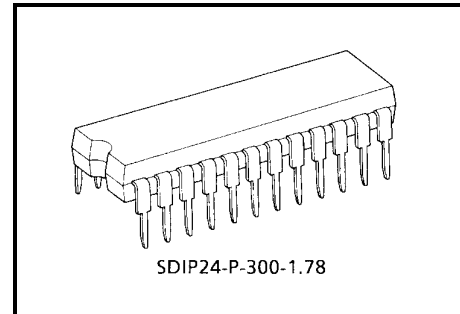


Weight: 1.2 g (typ.)


FEATURES

- Input terminal : High active
- $\overline{\text{Enable}}$ terminal : Low input output active mode
- Output current : $I_{\text{OUT}} = 1.8 \text{ A (MAX)}$
- A little change of output voltage
: $\Delta V_{\text{OH1}} \leq 0.45 \text{ V}$
(at $I_{\text{OH}} = 0.18 \text{ A} \sim 1.44 \text{ A}$)
- Package type : DIP24N
- Input compatible with TTL, 5 V CMOS

PIN CONNECTION (TOP VIEW)

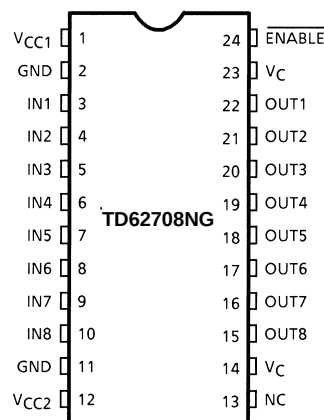

SCHEMATICS (EACH DRIVER)

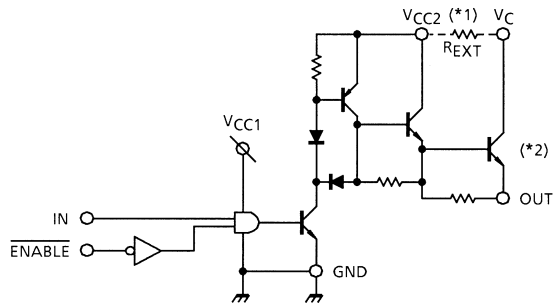


FUNCTION


IN	ENABLE	OUT
H	L	ON
L	L	OFF
Don't Care	H	OFF

- * 1: For normal use, connect V_{CC2} and V_C .
For applications whose thermal conditions are more demanding, TOSHIBA recommends an external resistor (R_{EXT} : approx. $0.9 \Omega / 2W$) be connected between V_{CC2} and V_C .
- * 2: When connecting an external resistor between BV_{CC2} and V_C , to avoid parasitic sub currents, set the voltage between V_C and OUT as 0.3 V or more.
Set the external resistor value so that the voltage between V_C and OUT is 0.3 V or more at the maximum temperature of the operating temperature range.

INPUT CIRCUIT : IN, ENABLE



Note: Since the states of the input pins (pins 3 to 10) are the same as those at high-level input, set the pins for unused channels to GND.

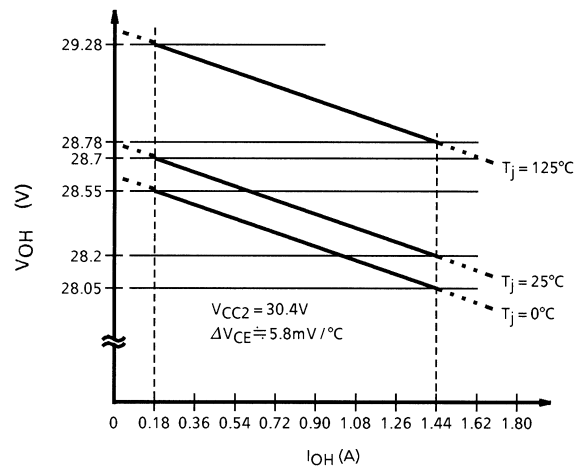

- Output voltage (Temperature characteristic)
Output Voltage (V_{OH}) has a Temperature Characteristic of $5.8 \text{ mV} / ^\circ\text{C}$, care must be taken to keep Junction Temp (T_j) within safety Limits.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage 1	V _{CC1}	-0.5~7.0	V
Supply Voltage 2	V _{CC2}	-0.5~40	
Output Current	I _{OUT}	1.8 (Note)	A
Input Voltage	V _{IN}	-0.5~7.0	V
Input Current	I _{IN}	±4.0	mA
Power Dissipation	P _D	1.78	W
Janction Temperature	T _j	150	°C
Operating Temperature	T _{opr}	-40~85	°C
Storage Temperature	T _{stg}	-55~150	°C

Note 1: 1.8 A / ch (32 µs, Duty ≤ 76%), Each Channel should not be switched on at same time.

Note 2: When mounting the device on the PC board, and the temperature exceeds 25°C, derate to 14.2 mW / °C.

RECOMMENDED OPERATING CONDITIONS


CHARACTERISTIC	SYMBOL	CONDITION	MIN	TYP.	MAX	UNIT
Supply Voltage 1	V _{CC1}	—	4.5	5.0	5.5	V
Supply Voltage 2	V _{CC2}	—	—	—	30	
Output Current	I _{OH} (Note)	—	—	—	1.44	A
Input Voltage	V _{IN} (H)	V _{IN} = H, V _{CC1} = 5.0 V	2.4	—	V _{CC}	V
	V _{IN} (L)	V _{IN} = L, V _{CC1} = 5.0 V	0	—	0.4	V
	V _{EN} (H)	V _{EN} = H, V _{CC1} = 5.0 V	2.4	—	V _{CC}	V
	V _{EN} (L)	V _{EN} = L, V _{CC1} = 5.0 V	0	—	0.4	V
Operating Temperature	T _{opr}	—	0	—	70	°C





Note: Each Channel should not be switched on at same time.

ELECTRICAL CHARACTERISTICS (Ta = 0–70°C)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN	TYP.	MAX	UNIT
Leakage Current	I_{L1}	—	$V_{CC1} = 7.0 \text{ V}$, $I_N = L$, $EN = H$	—	—	100	μA
	I_{L2}		$V_{CC2} = 30 \text{ V}$, $I_N = L$, $EN = H$	—	—	100	
	I_{L3}		$V_C = 30 \text{ V}$, $I_N = L$, $EN = H$	—	—	100	
Input Current	I_{IN1}	—	$V_{CC1} = 5.0 \text{ V}$, $V_{IN} = 5.0 \text{ V}$	—	0	10	μA
	I_{IN2}		$V_{CC1} = 5.0 \text{ V}$, $V_{IN} = 0 \text{ V}$	0.55	0.8	1.1	mA
	I_{EN1}		$V_{CC1} = 5.0 \text{ V}$, $V_{EN} = 5.0 \text{ V}$	—	0	10	μA
	I_{EN2}		$V_{CC1} = 5.0 \text{ V}$, $V_{EN} = 0 \text{ V}$	0.55	0.8	1.1	mA
Input Voltage	V_{INH}	—	$V_{CC1} = 5.0 \text{ V}$	2.0	—	$V_{CC} + 0.4$	V
	V_{INL}		$V_{CC1} = 5.0 \text{ V}$	GND–0.4	—	0.8	
	V_{ENH}		$V_{CC1} = 5.0 \text{ V}$	2.0	—	$V_{CC} + 0.4$	
	V_{ENL}		$V_{CC1} = 5.0 \text{ V}$	GND–0.4	—	0.8	
Output Voltage	V_{OH1}	—	$I_{OH} = 1.44 \text{ A}$	$V_{CC2} = 30 \text{ V}$	27.0	27.5	V
	V_{OH2}		$I_{OH} = 0.18 \text{ A}$		27.5	28.0	
Change Of Output Voltage	ΔV_{OH1}	—	$V_{OH1} - V_{OH2}$ ($T_j = 25^\circ\text{C}$)	—	0.3	0.45	V
Output Voltage Temperature Characteristic	ΔV_{CE2}	—	V_{OH} ($T_j = 105^\circ\text{C}$) – V_{OH} ($T_j = 25^\circ\text{C}$) $I_{OH} = 0.18 \text{ A}$	—	0.5	—	V
Propagation Delay Time	t_{pLH1}	—	$V_{CC1} = V_{IN} = 4.5 \text{ V}$ $V_{CC2} = 30 \text{ V}$	$I_{OUT} = 0.18 \text{ A}$	—	0.1	μs
	t_{pLH2}			$I_{OUT} = 1.44 \text{ A}$	—	0.2	
	t_{pHL1}			$I_{OUT} = 0.18 \text{ A}$	—	1.0	
	t_{pHL2}			$I_{OUT} = 1.44 \text{ A}$	—	1.5	
Rise Time	t_{r1}	—	$V_{CC1} = V_{IN} = 4.5 \text{ V}$ $V_{CC2} = 30 \text{ V}$	$I_{OUT} = 0.18 \text{ A}$	—	0.05	μs
	t_{r2}			$I_{OUT} = 1.44 \text{ A}$	—	0.1	
Fall Time	t_{f1}	—	$V_{CC1} = V_{IN} = 4.5 \text{ V}$ $V_{CC2} = 30 \text{ V}$	$I_{OUT} = 0.18 \text{ A}$	—	0.3	μs
	t_{f2}			$I_{OUT} = 1.44 \text{ A}$	—	0.3	

AC TEST CIRCUIT

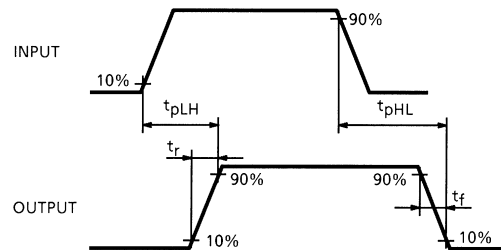

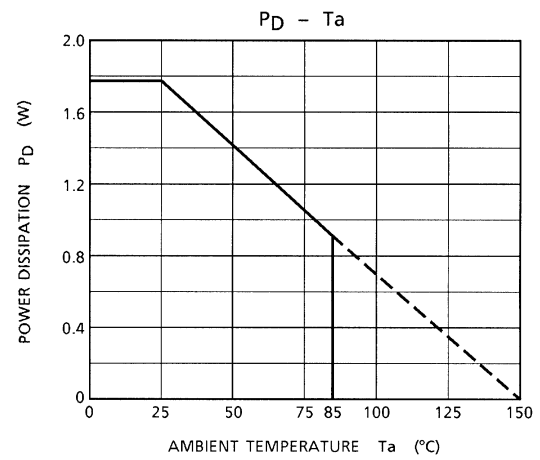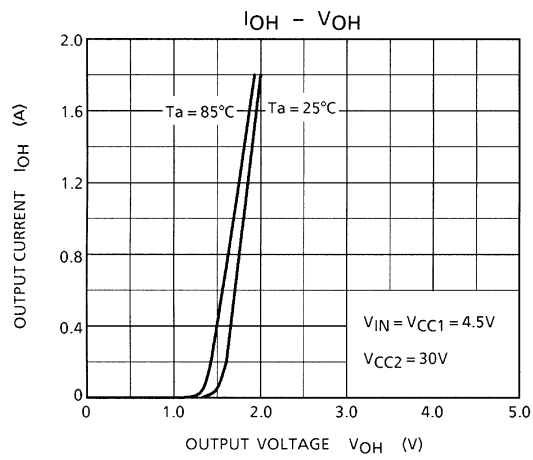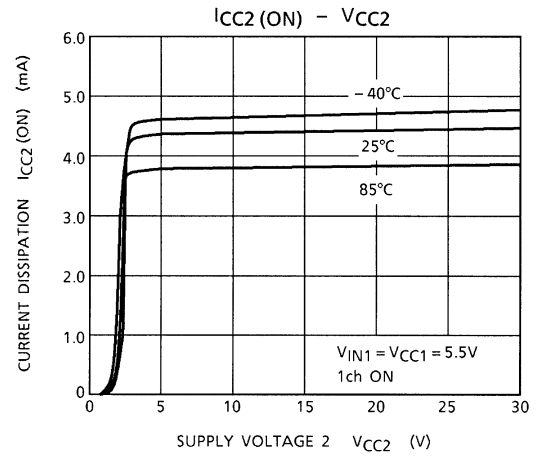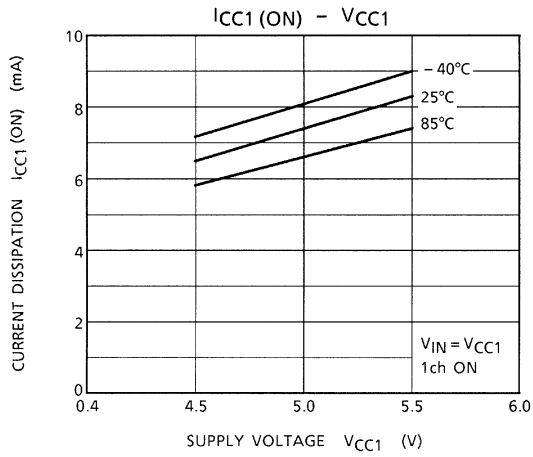

- Thermal calculation

Where, power dissipation = $(V_{CC1} \times I_{CC1}) + (V_{CC2} \times I_{CC2} \times ch \times Duty) + (V_{OH} \times I_{OH} \times ch \times Duty)$
 and the transient thermal resistance of DIP24N $(R + h) = 70^{\circ}\text{C} / \text{W}$, the junction temperature (T_j) is :

$$T_j (\text{MAX}) \geq (P_D \times R + h) + T_a (\text{MAX}) \cdots \cdots \cdots \text{expression (A)}$$

Conditions: $V_{CC1} = 5 \text{ V}$ ($I_{CC1} = \text{approx. } 8 \text{ mA}$), $V_{CC2} = 30 \text{ V}$ ($I_{CC2} = \text{approx. } 5 \text{ mA}$), 1ch on
 $V_{OH} = \text{approx. } 2.0 \text{ V}$, $I_{OH} = 1.44 \text{ A}$,
 $T_j (\text{MAX}) = 120^{\circ}\text{C}$, ambient temperature (MAX) : $T_a = 70^{\circ}\text{C}$

(1) When V_{CC2} and V_C are connected:

Due to expression (a), for designs without cooling fins, duty = approx. 20% is required, as the following calculation shows :

$$\begin{aligned} P_D &= (5 \text{ V} \times 8 \text{ mA}) + (30 \text{ V} \times 5 \text{ mA} \times 1ch \times 0.2) + (2.0 \text{ V} \times 1.44 \text{ A} \times 1ch \times 0.2) \\ &= 40 \text{ mW} + 30 \text{ mW} + 576 \text{ mW} \\ &= 646 \text{ mW} \end{aligned}$$

$$T_j (\text{MAX}) \geq (646 \text{ mW} \times 70^{\circ}\text{C} / \text{W}) + 70^{\circ}\text{C} = \text{approx. } 115^{\circ}\text{C} \cdots \cdots \cdots \text{OK}$$

(2) When an external resistor ($R_{EXT} = 0.9 \Omega$) is connected between V_{CC2} and V_C :

Change the above condition :

$$\begin{aligned} V_{OH} &= 2.0 \text{ V} - (0.9 \Omega \times 1.44 \text{ A}) \\ &= 0.7 \text{ V} \end{aligned}$$

P_D when substituted in expression (a) :

$$\begin{aligned} P_D &= (5 \text{ V} \times 8 \text{ mA}) + (30 \text{ V} \times 5 \text{ mA} \times 1 \times 0.2) + (0.7 \text{ V} \times 1.44 \text{ A} \times 1 \times 0.2) \\ &= 40 \text{ mW} + 30 \text{ mW} + 202 \text{ mW} \\ &= 272 \text{ mW} \end{aligned}$$


$$T_j (\text{MAX}) \geq (272 \text{ mW} \times 70^{\circ}\text{C} / \text{W}) + 70^{\circ}\text{C} = \text{approx. } 89^{\circ}\text{C}$$

when $T_j (\text{MAX}) = 120^{\circ}\text{C}$


·
· (calculation omitted)
·

Duty can be approx. 58%.

- Duty (when duty = 20%)
Condition : pulse width = 32 μ s (cycle = 1280 μ s)
Duty = $(32 \mu\text{s} \times 8\text{ch}) \div 1280 \mu\text{s} = 20\%$

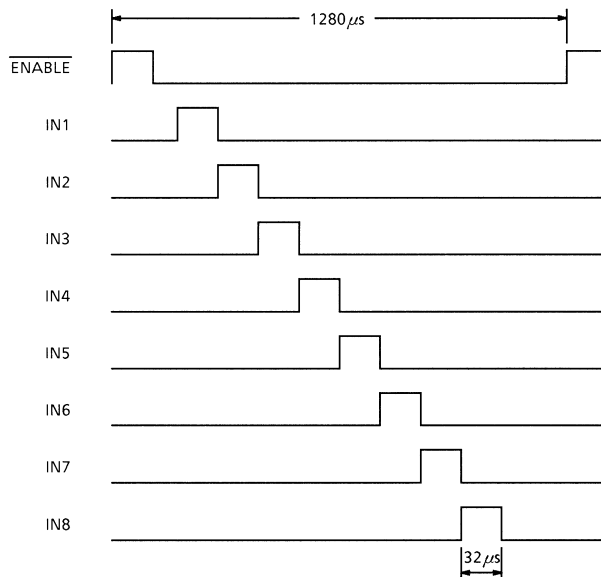

APPLICATION CIRCUIT

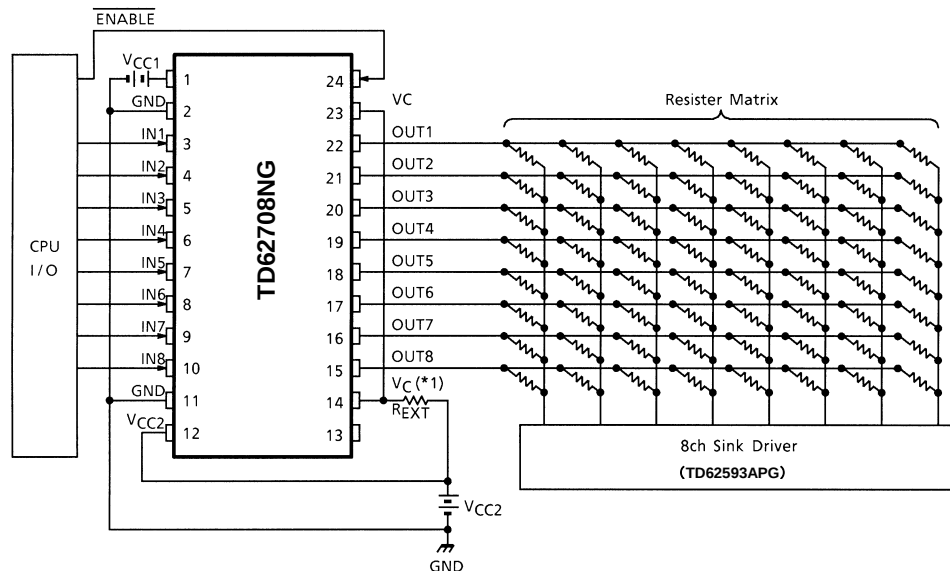

Note 1: TOSHIBA recommends external resistor R_{EXT} (approx. 0.9 Ω / 2W) be connected between V_{CC2} and V_C .

PRECAUTIONS for USING

This IC does not include built-in protection circuits for excess current or overvoltage.

If this IC is subjected to excess current or overvoltage, it may be destroyed.


Hence, the utmost care must be taken when systems which incorporate this IC are designed.

Utmost care is necessary in the design of the output line, V_{CC} (V_{CC1} , V_{CC2} , V_C) and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

PACKAGE DIMENSIONS

SDIP24-P-300-1.78

Unit : mm

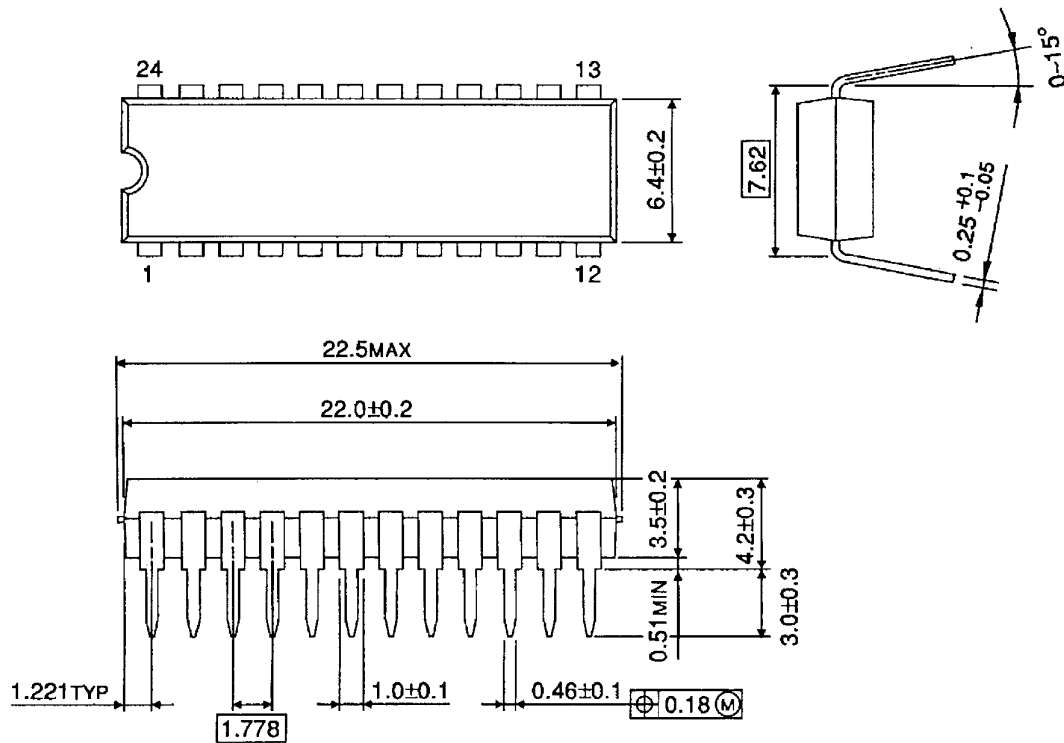

Weight: 1.2 g (typ.)

About solderability, following conditions were confirmed

- Solderability

- (1) Use of Sn-63Pb solder Bath

- solder bath temperature = 230°C
 - dipping time = 5 seconds
 - the number of times = once
 - use of R-type flux

- (2) Use of Sn-3.0Ag-0.5Cu solder Bath

- solder bath temperature = 245°C
 - dipping time = 5 seconds
 - the number of times = once
 - use of R-type flux

RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.