
2SC1342

Silicon NPN Epitaxial Planar


HITACHI

Application

- VHF amplifier, mixer
- Local oscillator

Outline

TO-92 (2)



1. Emitter
2. Collector
3. Base

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	30	V
Collector to emitter voltage	V_{CEO}	20	V
Emitter to base voltage	V_{EBO}	4	V
Collector current	I_C	30	mA
Collector power dissipation	P_C	100	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C


Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Collector to base breakdown voltage	$V_{(BR)CBO}$	30	—	—	V	$I_C = 10\text{ }\mu\text{A}$, $I_E = 0$
Collector to emitter breakdown voltage	$V_{(BR)CEO}$	20	—	—	V	$I_C = 1\text{ mA}$, $R_{BE} = \infty$
Emitter to base breakdown voltage	$V_{(BR)EBO}$	4	—	—	V	$I_E = 10\text{ }\mu\text{A}$, $I_C = 0$
Collector cutoff current	I_{CBO}	—	—	0.5	μA	$V_{CB} = 10\text{ V}$, $I_E = 0$
DC current transfer ratio	h_{FE}^{*1}	35	—	200		$V_{CE} = 6\text{ V}$, $I_C = 1\text{ mA}$
Collector to emitter saturation voltage	$V_{CE(sat)}$	—	0.8	1.2	V	$I_C = 10\text{ mA}$, $I_B = 1\text{ mA}$
Collector output capacitance	C_{ob}	—	1.1	1.5	pF	$V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 1\text{ MHz}$
Base time constant	$r_{bb'} \cdot C_C$	—	20	35	ps	$V_{CB} = 6\text{ V}$, $I_C = 1\text{ mA}$, $f = 31.8\text{ MHz}$
Gain bandwidth product	f_T	150	320	—	MHz	$V_{CE} = 6\text{ V}$, $I_C = 1\text{ mA}$
Noise figure	NF	—	5.5	8.5	dB	$V_{CE} = 6\text{ V}$, $I_C = 1\text{ mA}$, $f = 100\text{ MHz}$, $R_g = 50\text{ }\Omega$
Reverse transfer capacitance	C_{re}	—	0.9	1.2	pF	$V_{CE} = 10\text{ V}$, $I_E = -1\text{ mA}$, $f = 1\text{ MHz}$
Power gain	PG	13	17	—	dB	$V_{CE} = 6\text{ V}$, $I_C = 1\text{ mA}$, $f = 100\text{ MHz}$, $R_g = 100\text{ }\Omega$, $R_L = 550\text{ }\Omega$, Unneutralized


Note: 1. The 2SC1342 is grouped by h_{FE} as follows.

A	B	C
35 to 70	60 to 120	100 to 200


Maximum Collector Dissipation Curve

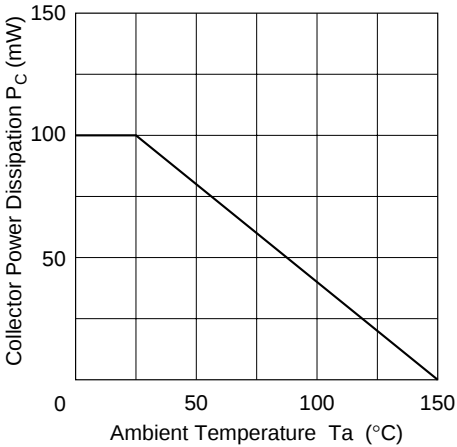


Typical Output Characteristics (1)




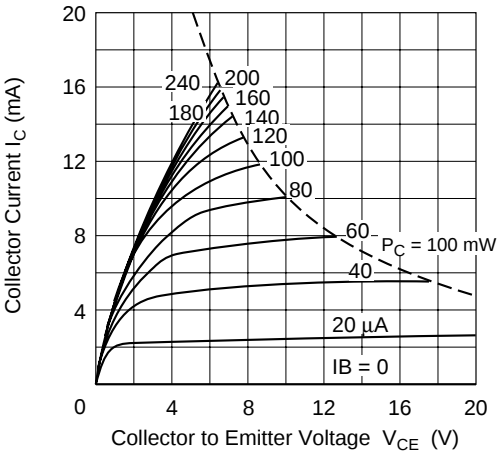






Typical Output Characteristics (2)

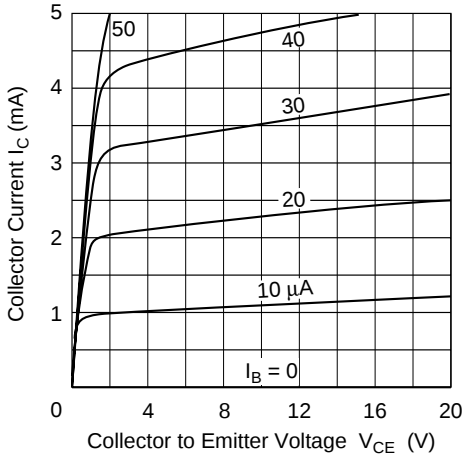


Typical Transfer Characteristics (1)

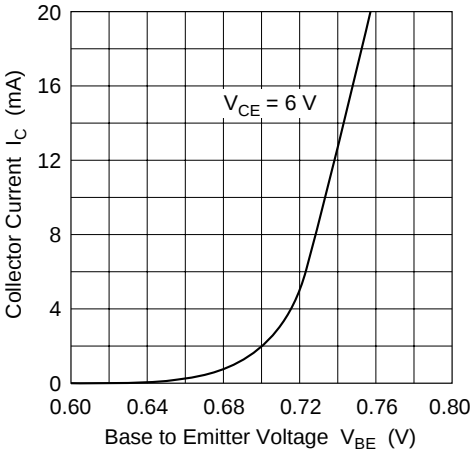

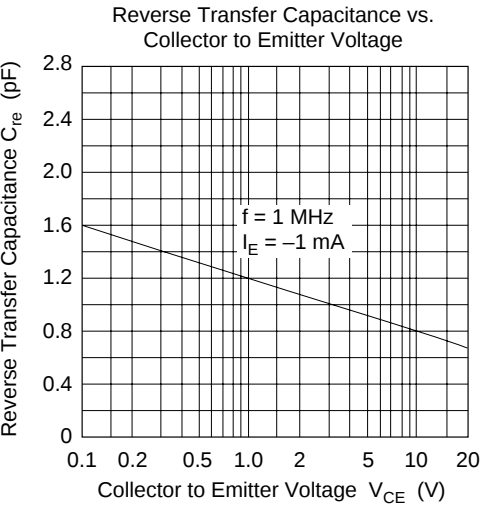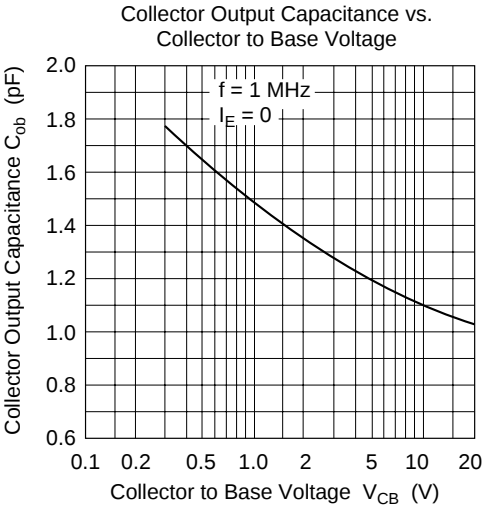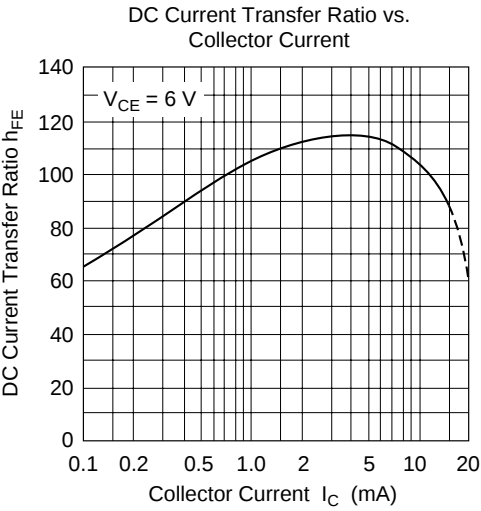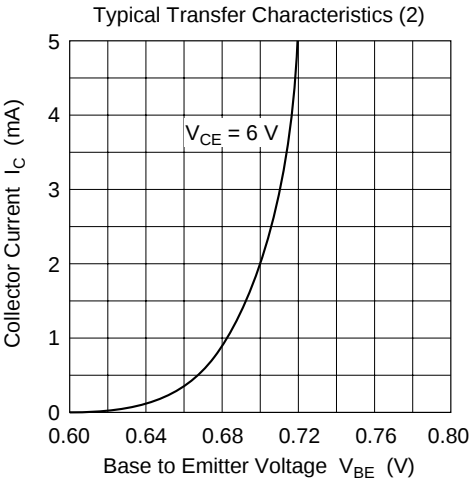

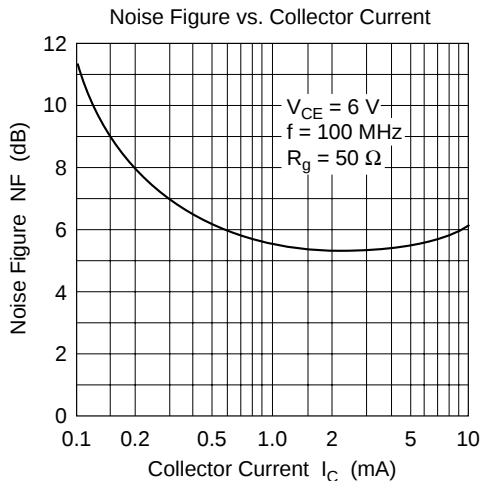
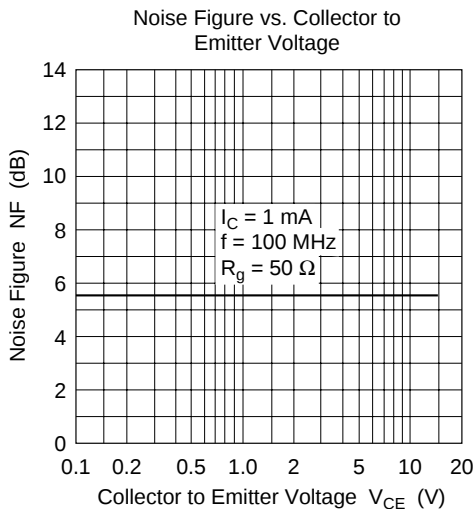
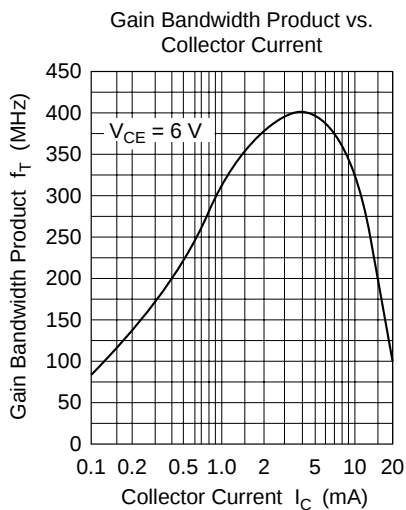
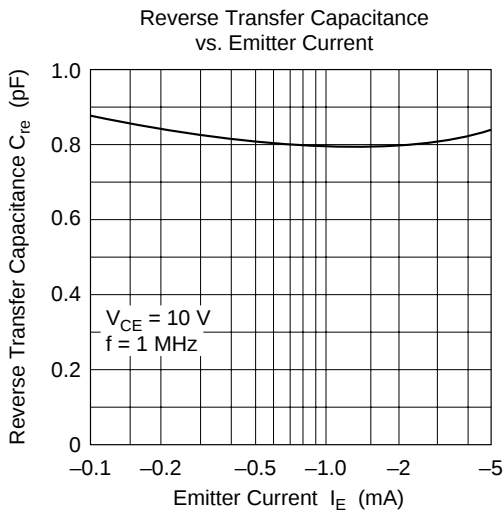






Power Gain Test Circuit




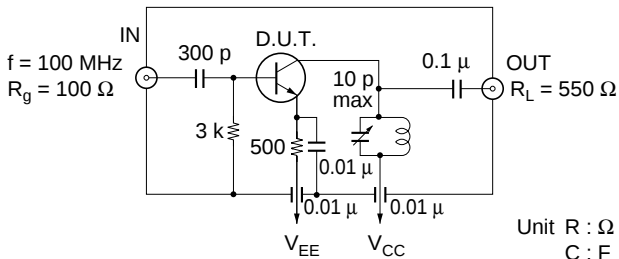



Small Signal y Parameters ($V_{CE} = 6V, I_C = 1\text{ mA}$, Emitter Common $T_a = 25^{\circ}C$)

Item	Symbol	f = 50 MHz	f = 100 MHz	f = 200 MHz	Unit
Input admittance	y _{ie}	1.8 + j5.5	4.3 + j9.9	11.5 + j15.25	mS
Reverse transfer admittance	y _{re}	-0.022 - j0.26	-0.04 - j0.52	-0.105 - j0.96	
Forward transfer admittance	y _{fe}	34 - j12	28 - j19	15.5 - j25	
Output admittance	y _{oe}	0.1 + j0.5	0.15 + j0.9	0.21 + j1.45	

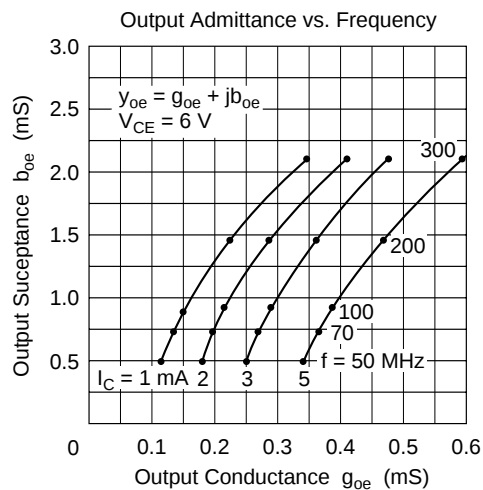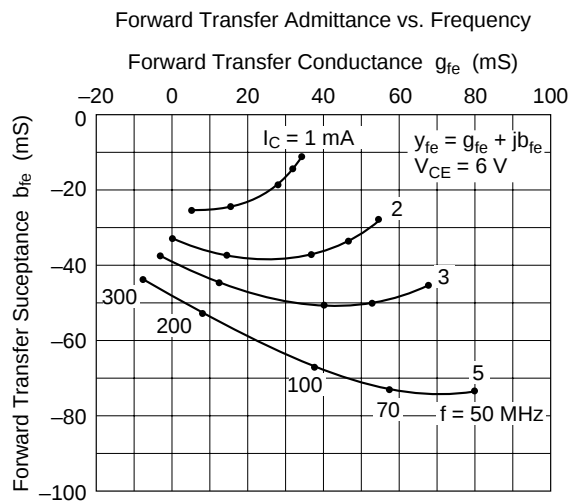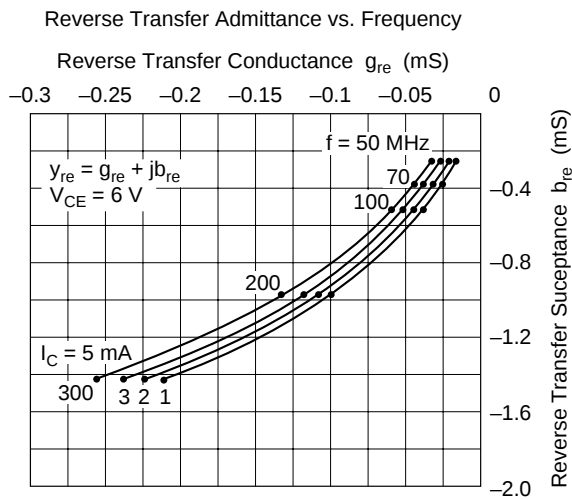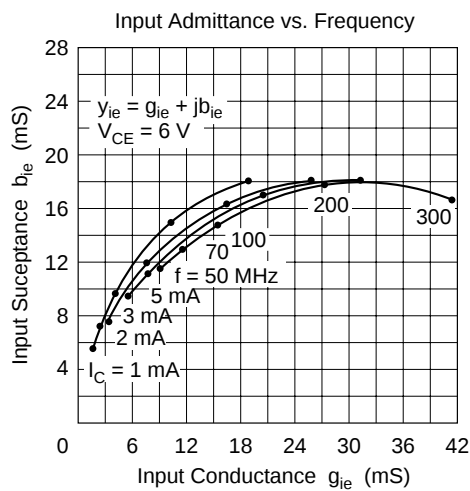

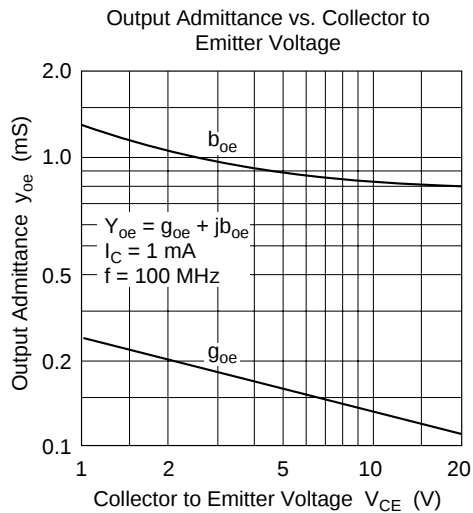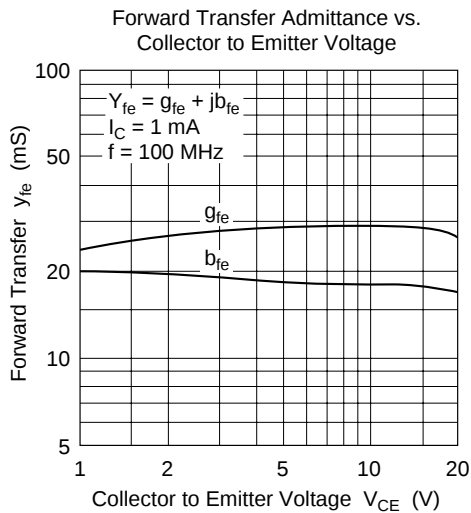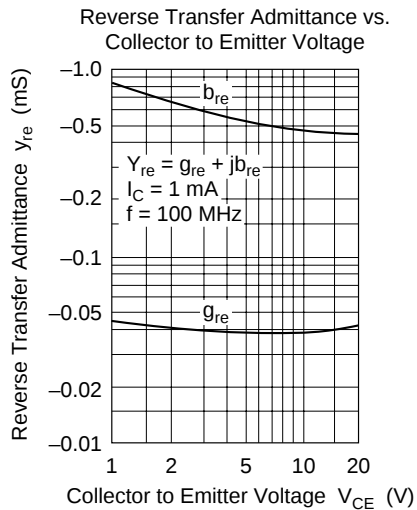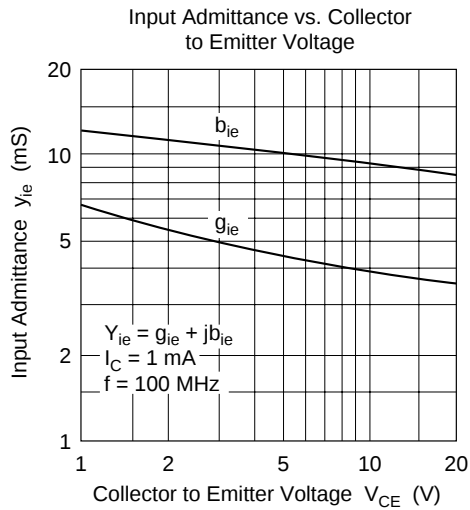

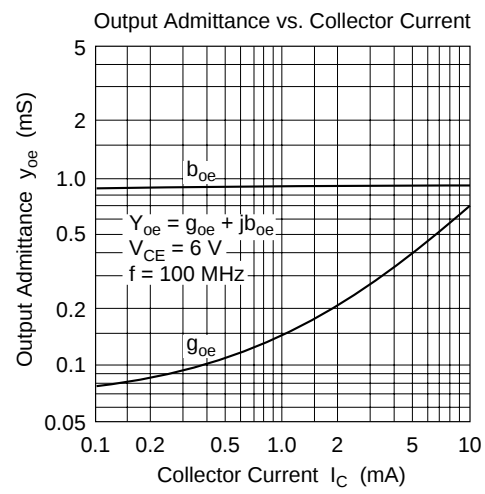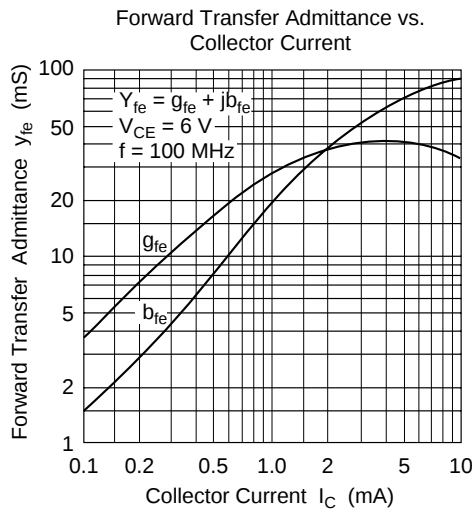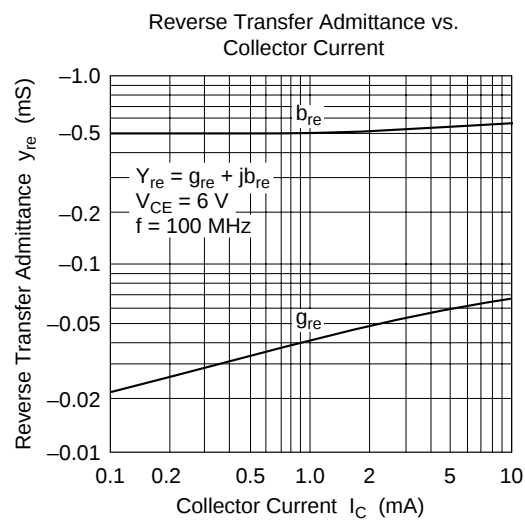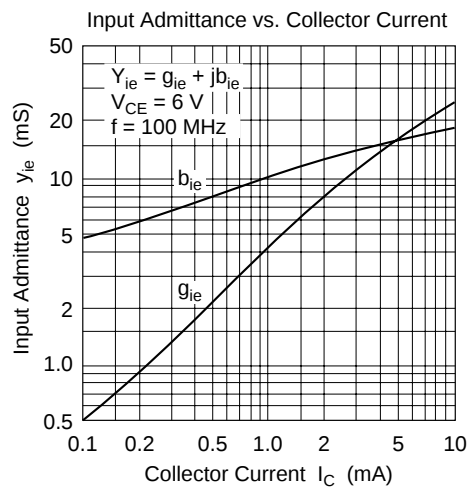

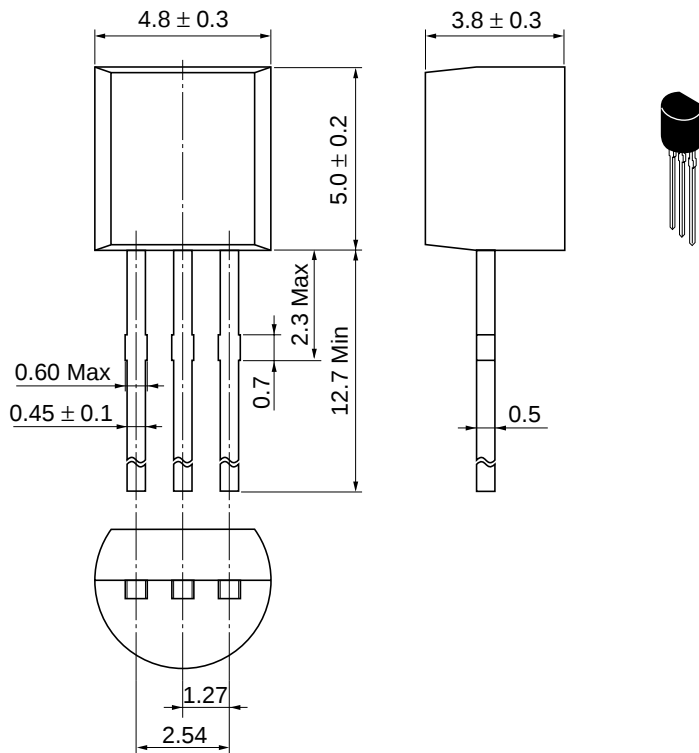

Hitachi Code	TO-92 (2)
JEDEC	Conforms
EIAJ	Conforms
Weight (reference value)	0.25 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia (Singapore)	: http://www.has.hitachi.com.sg/grp3/sicd/index.htm
	Asia (Taiwan)	: http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
	Asia (HongKong)	: http://www.hitachi.com.hk/eng/bo/grp3/index.htm
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322
--	---

Hitachi Asia Pte. Ltd. 16 Collyer Quay #20-00 Hitachi Tower Singapore 049318 Tel: 535-2100 Fax: 535-1533 Hitachi Asia Ltd. Taipei Branch Office 3F, Hung Kuo Building, No.167, Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180
--

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1999. All rights reserved. Printed in Japan.