

Self Powered AC Current Transducer

DIN RAIL / PANEL MOUNT, AVERAGE RMS



CR4210 CR4211

Single Element - .79" Window
2 to 200 AAC Input Range



CR4210S CR4211S

Single Element - 1.22" Window
2 to 200 AAC Input Range

The **CR4210** and **CR4211** Series Current Transducers are self powered. These transducers are calibrated to provide a 0-5 VDC and 0-10 VDC signal that is proportional to the average RMS input AC current. Designed for multi-point current sensing, these devices provide excellent features in a high value package.

Applications


Phase fired controlled heaters
Quickly varying motor loads
Chopped wave form drivers
Harmonic currents

Features

35mm DIN Rail or Panel Mount
Available with 0 - 5 VDC or 0-10 VDC outputs
Self powered, requires no external power source
Use with external current transformers
Low cost
Connection diagram printed on case

Regulatory Agencies

Recognized to UL 61010B-1
Recognized to CAN/CSA-C22.2, No. 61010-1-2004
Meets requirement of IEC 61010-1 and BS EN 61010-1

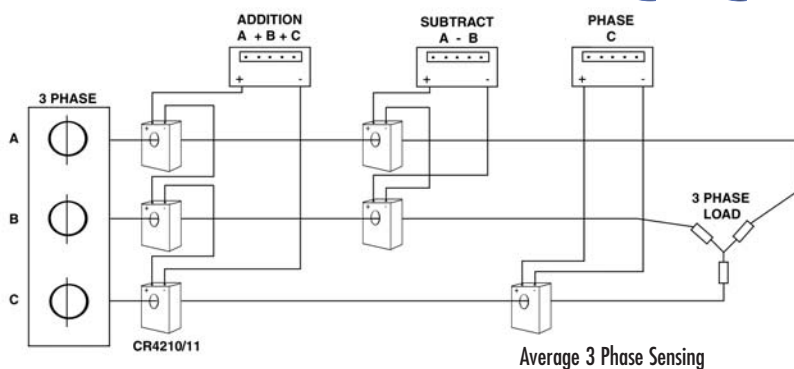

All single phase current transducers are available in split core design. Simply put an "S" at the end of the prefix*

I.E. CR4210S-10

* Not UL Recognized

PART NUMBERS

CR4210(S)	-	Single element with 0 - 5 VDC output (split core design)
CR4211(S)	-	Single element with 0 - 10 VDC output (split core design)*

*CR4210S and CR4211S only available in ranges 20 amps and above

Add suffix for input range

2	-	0-2 AAC
5	-	0-5 AAC
10	-	0-10 AAC
20	-	0-20 AAC
50	-	0-50 AAC
70	-	0-70 AAC
100	-	0-100 AAC
150	-	0-150 AAC
200	-	0-200 AAC

Ranges available up to and including 600 AAC



CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: sales@crmagnetics.com


Self Powered AC Current Transducer

DIN RAIL / PANEL MOUNT, AVERAGE RMS

SPECIFICATIONS


Basic Accuracy:.....	0.5%	Cleaning:.....	Water-dampened cloth
Thermal Drift:.....	500 PPM/°C	Output Load:.....	1M Ω or Greater
Operating Temperature:.....	0°C to +60°C	Greater Response Time:.....	250 ms max., 0-90%FS
Installation Category:.....	CAT II	Relative Humidity:.....	80% for temperatures up to 31°C and decreasing linearly to 50% at 40°C
Pollution Degree:.....	2	Supply Power:.....	Self powered (output voltage is obtained from current-sensing conductor)
Insulation Voltage:.....	2500 VDC	Torque Specs.:.....	3.0 inch lbs. (0.4Nm)
Altitude:.....	2000 meter max.	Weight:.....	0.5 lbs.
Frequency Range:.....	50Hz - 400Hz		
Calibration:.....	Average Sensing, RMS Calibrated		
MTBF:.....	Greater than 100 K hours		

OUTLINE DRAWING

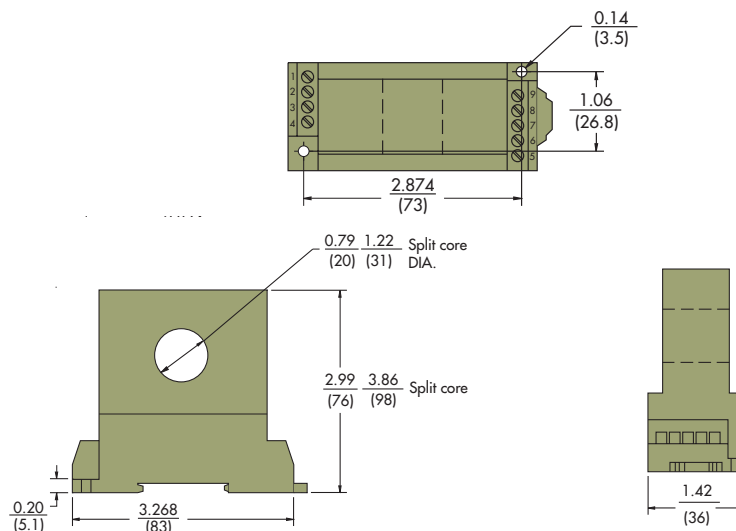

1 hole: 0.79(20) Dia. for CR4210 & 4211 (shown)

CONNECTION DIAGRAM

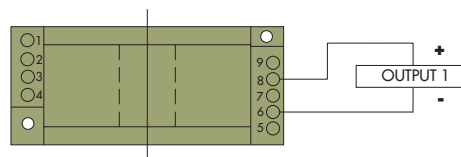

CR4210 Single Element 0 - 5 VDC Output

CR4211 Single Element 0 - 10 VDC Output

Request CR Magnetics Low & Medium Voltage Current Transformers Catalog.

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.



CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>