

# LDO Regulator - Fast Transient Response, Low Voltage

500 mA

## NCP176

The NCP176 is CMOS LDO regulator featuring 500 mA output current. The input voltage is as low as 1.4 V and the output voltage can be set from 0.7 V.

### Features

- Operating Input Voltage Range: 1.4 V to 5.5 V
- Output Voltage Range: 0.7 to 3.6 V (0.1 V steps)
- Quiescent Current typ. 60  $\mu$ A
- Low Dropout: 130 mV typ. at 500 mA,  $V_{OUT} = 2.5$  V
- High Output Voltage Accuracy  $\pm 0.8\%$  ( $V_{OUT} > 1.8$  V)
- Stable with Small 1  $\mu$ F Ceramic Capacitors
- Over-current Protection
- Built-in Soft Start Circuit to Suppress Inrush Current
- Thermal Shutdown Protection: 165°C
- With (NCP176A) and Without (NCP176B) Output Discharge Function
- Available in XDFN6 1.2 mm x 1.2 mm x 0.4 mm Package
- These are Pb-free Devices

### Typical Applications

- Battery Powered Equipment
- Portable Communication Equipment
- Cameras, Image Sensors and Camcorders


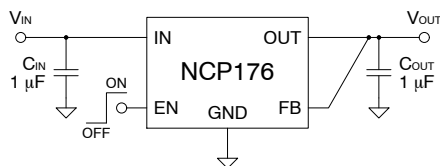


Figure 1. Typical Application Schematic




XDFN6  
MX SUFFIX  
CASE 711AT

### PIN CONNECTIONS



### MARKING DIAGRAM



XX = Specific Device Code  
M = Date Code

### ORDERING INFORMATION

See detailed ordering and shipping information in the ordering information section on page 11 of this data sheet.

## NCP176

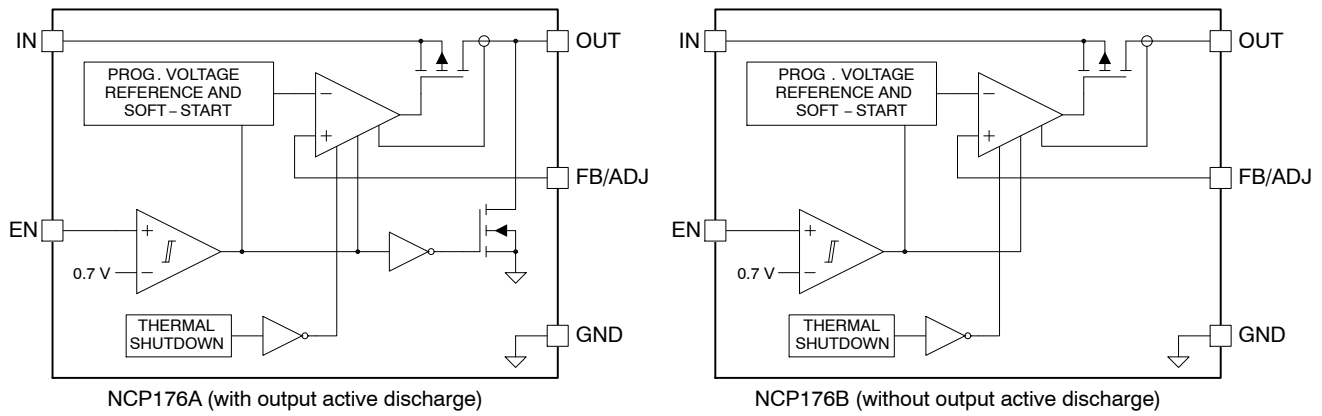


Figure 2. Internal Block Diagram

Table 1. PIN FUNCTION DESCRIPTION

| Pin No.<br>XDFN6 | Pin Name | Description                                                                                        |
|------------------|----------|----------------------------------------------------------------------------------------------------|
| 1                | OUT      | LDO output pin                                                                                     |
| 2                | FB       | Feedback input pin                                                                                 |
| 3                | GND      | Ground pin                                                                                         |
| 4                | EN       | Chip enable input pin (active "H")                                                                 |
| 5                | N/C      | Not internally connected. This pin can be tied to the ground plane to improve thermal dissipation. |
| 6                | IN       | Power supply input pin                                                                             |
| EPAD             | EPAD     | It is recommended to connect the EPAD to GND, but leaving it open is also acceptable               |

Table 2. ABSOLUTE MAXIMUM RATINGS

| Rating                                    | Symbol             | Value                  | Unit |
|-------------------------------------------|--------------------|------------------------|------|
| Input Voltage (Note 1)                    | IN                 | -0.3 to 6.0            | V    |
| Output Voltage                            | OUT                | -0.3 to $V_{IN} + 0.3$ | V    |
| Chip Enable Input                         | EN                 | -0.3 to 6.0            | V    |
| Output Current                            | $I_{OUT}$          | Internally Limited     | mA   |
| Maximum Junction Temperature              | $T_{J(MAX)}$       | 150                    | °C   |
| Storage Temperature                       | $T_{STG}$          | -55 to 150             | °C   |
| ESD Capability, Human Body Model (Note 2) | ESD <sub>HBM</sub> | 2000                   | V    |
| ESD Capability, Machine Model (Note 2)    | ESD <sub>MM</sub>  | 200                    | V    |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
2. This device series incorporates ESD protection and is tested by the following methods:  
 ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)  
 ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)  
 Latchup Current Maximum Rating tested per JEDEC standard: JESD78

Table 3. THERMAL CHARACTERISTICS

| Rating                                                              | Symbol          | Value | Unit |
|---------------------------------------------------------------------|-----------------|-------|------|
| Thermal Resistance, Junction-to-Air, XDFN6 1.2 mm x 1.2 mm (Note 3) | $R_{\theta JA}$ | 123   | °C/W |

3. Measured according to JEDEC board specification. Detailed description of the board can be found in JESD51-7.

# NCP176

**Table 4. ELECTRICAL CHARACTERISTICS – devices with  $V_{OUT-NOM} < 1.8\text{ V}$**   $V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$  and  $V_{IN} \geq 1.6\text{ V}$ ,  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ }\mu\text{F}$ ,  $T_J = 25^\circ\text{C}$ . The specifications **in bold** are guaranteed at  $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ . (Note 4)

| Parameter                                         | Test Conditions                                                                                                                                                                     | Symbol       | Min        | Typ                  | Max        | Unit                |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------|----------------------|------------|---------------------|
| Input Voltage                                     |                                                                                                                                                                                     | $V_{IN}$     | <b>1.4</b> |                      | <b>5.5</b> | V                   |
| Output Voltage                                    | $T_J = +25^\circ\text{C}$                                                                                                                                                           | $V_{OUT}$    | -18        |                      | +18        | mV                  |
|                                                   | $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$                                                                                                                                  |              | <b>-55</b> |                      | <b>+50</b> |                     |
| Line Regulation                                   | $V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ to $5.25\text{ V}$<br>$V_{IN} \geq 1.4\text{ V}$                                                                                              | LineReg      |            | 0.02                 | <b>0.1</b> | %/V                 |
| Load Regulation                                   | $1\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.8\text{ V}$                                                               | LoadReg      |            | 1                    | <b>5.0</b> | mV                  |
|                                                   | $1\text{ mA} \leq I_{OUT} \leq 400\text{ mA}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.7\text{ V}$                                                               |              |            | 1                    | <b>5.0</b> |                     |
|                                                   | $1\text{ mA} \leq I_{OUT} \leq 300\text{ mA}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.6\text{ V}$                                                               |              |            | 1                    | <b>5.0</b> |                     |
| Dropout Voltage (Note 5)                          | $I_{OUT} = 500\text{ mA}$ $1.4\text{ V} \leq V_{OUT} < 1.8\text{ V}$                                                                                                                | $V_{DO}$     |            | 295                  | <b>380</b> | mV                  |
| Quiescent Current                                 | $I_{OUT} = 0\text{ mA}$                                                                                                                                                             | $I_Q$        |            | 60                   | <b>90</b>  | $\mu\text{A}$       |
| Standby Current                                   | $V_{EN} = 0\text{ V}$                                                                                                                                                               | $I_{STBY}$   |            | 0.05                 | <b>1</b>   | $\mu\text{A}$       |
| Output Current Limit                              | $V_{OUT} = V_{OUT-NOM} - 100\text{ mV}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.8\text{ V}$                                                                     | $I_{OUT}$    | <b>500</b> |                      |            | mA                  |
|                                                   | $V_{OUT} = V_{OUT-NOM} - 100\text{ mV}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.7\text{ V}$                                                                     |              | <b>400</b> |                      |            |                     |
|                                                   | $V_{OUT} = V_{OUT-NOM} - 100\text{ mV}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.6\text{ V}$                                                                     |              | <b>300</b> |                      |            |                     |
| Short Circuit Current                             | $V_{OUT} = 0\text{ V}$<br>$V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ and $V_{IN} \geq 1.8\text{ V}$                                                                                      | $I_{SC}$     | <b>550</b> | 750                  |            | mA                  |
| Enable Threshold Voltage                          | EN Input Voltage "H"                                                                                                                                                                | $V_{ENH}$    | <b>1.0</b> |                      |            | V                   |
|                                                   | EN Input Voltage "L"                                                                                                                                                                | $V_{ENL}$    |            |                      | <b>0.4</b> |                     |
| Enable Input Current                              | $V_{EN} = V_{IN} = 5.5\text{ V}$                                                                                                                                                    | $I_{EN}$     |            | 0.15                 | <b>0.6</b> | $\mu\text{A}$       |
| Power Supply Rejection Ratio                      | $f = 1\text{ kHz}$ , Ripple $0.2\text{ V}_{p-p}$ ,<br>$V_{IN} = V_{OUT-NOM} + 1.0\text{ V}$ , $I_{OUT} = 30\text{ mA}$<br>( $V_{OUT} \leq 2.0\text{ V}$ , $V_{IN} = 3.0\text{ V}$ ) | PSRR         |            | 75                   |            | dB                  |
| Output Noise                                      | $f = 10\text{ Hz}$ to $100\text{ kHz}$                                                                                                                                              |              |            | 40x<br>$V_{OUT-NOM}$ |            | $\mu\text{V}_{RMS}$ |
| Output Discharge Resistance (NCP176A option only) | $V_{IN} = 4.0\text{ V}$ , $V_{EN} = 0\text{ V}$ , $V_{OUT} = V_{OUT-NOM}$                                                                                                           | $R_{ACTDIS}$ |            | 60                   |            | $\Omega$            |
| Thermal Shutdown Temperature                      | Temperature rising from $T_J = +25^\circ\text{C}$                                                                                                                                   | $T_{SD}$     |            | 165                  |            | $^\circ\text{C}$    |
| Thermal Shutdown Hysteresis                       | Temperature falling from $T_{SD}$                                                                                                                                                   | $T_{SDH}$    |            | 20                   |            | $^\circ\text{C}$    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Performance guaranteed over the indicated operating temperature range by design and/or characterization. Production tested at  $T_A = 25^\circ\text{C}$ .

Low duty cycle pulse techniques are used during the testing to maintain the junction temperature as close to ambient as possible.

5. Measured when the output voltage falls -3% below the nominal output voltage (voltage measured under the condition  $V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ ).

# NCP176

**Table 5. ELECTRICAL CHARACTERISTICS – devices with  $V_{OUT-NOM} \geq 1.8\text{ V}$**   $V_{IN} = V_{OUT-NOM} + 1\text{ V}$ ,  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ }\mu\text{F}$ ,  $T_J = 25^\circ\text{C}$ . The specifications in **bold** are guaranteed at  $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ . (Note 6)

| Parameter                                         | Test Conditions                                                                                                                                                                     | Symbol       | Min         | Typ                  | Max         | Unit                |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|----------------------|-------------|---------------------|
| Input Voltage                                     |                                                                                                                                                                                     | $V_{IN}$     | <b>1.4</b>  |                      | <b>5.5</b>  | V                   |
| Output Voltage                                    | $T_J = +25^\circ\text{C}$                                                                                                                                                           | $V_{OUT}$    | -0.8        |                      | +0.8        | %                   |
|                                                   | $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$                                                                                                                                  |              | <b>-1.5</b> |                      | <b>+1.5</b> |                     |
| Line Regulation                                   | $V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ to $5.25\text{ V}$                                                                                                                            | LineReg      |             | 0.02                 | <b>0.1</b>  | %/V                 |
| Load Regulation                                   | $1\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$                                                                                                                                       | LoadReg      |             | 1                    | <b>5.0</b>  | mV                  |
| Dropout Voltage (Note 7)                          | $I_{OUT} = 500\text{ mA}$                                                                                                                                                           | $V_{DO}$     |             | 200                  | <b>275</b>  | mV                  |
|                                                   |                                                                                                                                                                                     |              |             | 160                  | <b>230</b>  |                     |
|                                                   |                                                                                                                                                                                     |              |             | 130                  | <b>190</b>  |                     |
|                                                   |                                                                                                                                                                                     |              |             | 110                  | <b>165</b>  |                     |
| Quiescent Current                                 | $I_{OUT} = 0\text{ mA}$                                                                                                                                                             | $I_Q$        |             | 60                   | <b>90</b>   | $\mu\text{A}$       |
| Standby Current                                   | $V_{EN} = 0\text{ V}$                                                                                                                                                               | $I_{STBY}$   |             | 0.05                 | <b>1</b>    | $\mu\text{A}$       |
| Output Current Limit                              | $V_{OUT} = V_{OUT-NOM} - 100\text{ mV}$                                                                                                                                             | $I_{OUT}$    | <b>500</b>  |                      |             | mA                  |
| Short Circuit Current                             | $V_{OUT} = 0\text{ V}$                                                                                                                                                              | $I_{SC}$     | <b>550</b>  | 750                  |             | mA                  |
| Enable Threshold Voltage                          | EN Input Voltage "H"                                                                                                                                                                | $V_{ENH}$    | <b>1.0</b>  |                      |             | V                   |
|                                                   | EN Input Voltage "L"                                                                                                                                                                | $V_{ENL}$    |             |                      | <b>0.4</b>  |                     |
| Enable Input Current                              | $V_{EN} = V_{IN} = 5.5\text{ V}$                                                                                                                                                    | $I_{EN}$     |             | 0.15                 | <b>0.6</b>  | $\mu\text{A}$       |
| Power Supply Rejection Ratio                      | $f = 1\text{ kHz}$ , Ripple $0.2\text{ V}_{p-p}$ ,<br>$V_{IN} = V_{OUT-NOM} + 1.0\text{ V}$ , $I_{OUT} = 30\text{ mA}$<br>( $V_{OUT} \leq 2.0\text{ V}$ , $V_{IN} = 3.0\text{ V}$ ) | PSRR         |             | 75                   |             | dB                  |
| Output Noise                                      | $f = 10\text{ Hz}$ to $100\text{ kHz}$                                                                                                                                              |              |             | 20x<br>$V_{OUT-NOM}$ |             | $\mu\text{V}_{RMS}$ |
| Output Discharge Resistance (NCP176A option only) | $V_{IN} = 4.0\text{ V}$ , $V_{EN} = 0\text{ V}$ , $V_{OUT} = V_{OUT-NOM}$                                                                                                           | $R_{ACTDIS}$ |             | 60                   |             | $\Omega$            |
| Thermal Shutdown Temperature                      | Temperature rising from $T_J = +25^\circ\text{C}$                                                                                                                                   | $T_{SD}$     |             | 165                  |             | $^\circ\text{C}$    |
| Thermal Shutdown Hysteresis                       | Temperature falling from $T_{SD}$                                                                                                                                                   | $T_{SDH}$    |             | 20                   |             | $^\circ\text{C}$    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

6. Performance guaranteed over the indicated operating temperature range by design and/or characterization. Production tested at  $T_A = 25^\circ\text{C}$ . Low duty cycle pulse techniques are used during the testing to maintain the junction temperature as close to ambient as possible.
7. Measured when the output voltage falls -3% below the nominal output voltage (voltage measured under the condition  $V_{IN} = V_{OUT-NOM} + 0.5\text{ V}$ ).

## TYPICAL CHARACTERISTICS

$V_{IN} = V_{OUT-NOM} + 1\text{ V}$  ( $V_{OUT-NOM} > 1.5\text{ V}$ ) OR  $V_{IN} = 2.5\text{ V}$  ( $V_{OUT-NOM} \leq 1.5\text{ V}$ ),  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ MF}$ ,  $T_J = 25^\circ\text{C}$ .

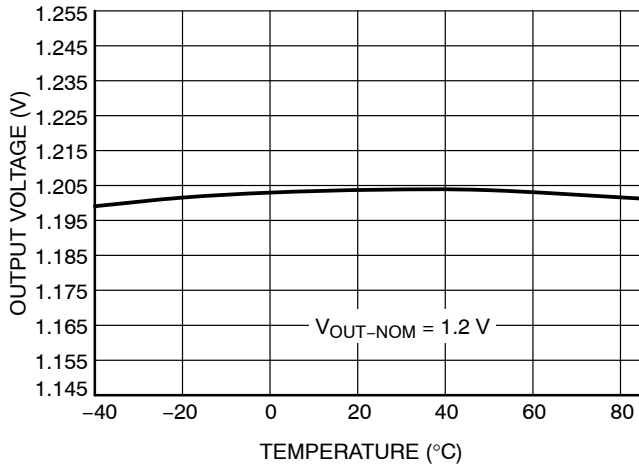


Figure 3. Output Voltage vs. Temperature

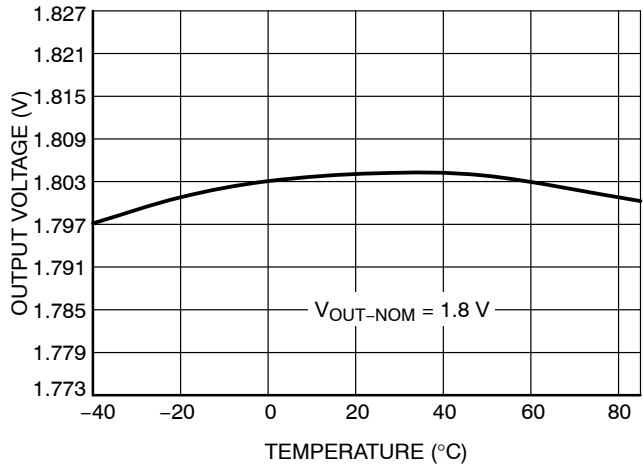


Figure 4. Output Voltage vs. Temperature

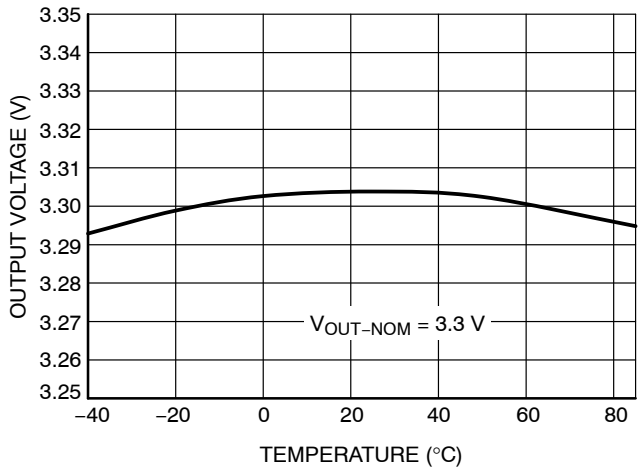


Figure 5. Output Voltage vs. Temperature

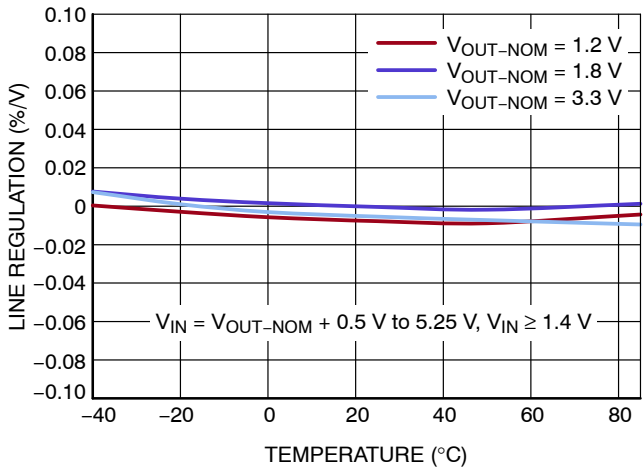


Figure 6. Line Regulation vs. Temperature

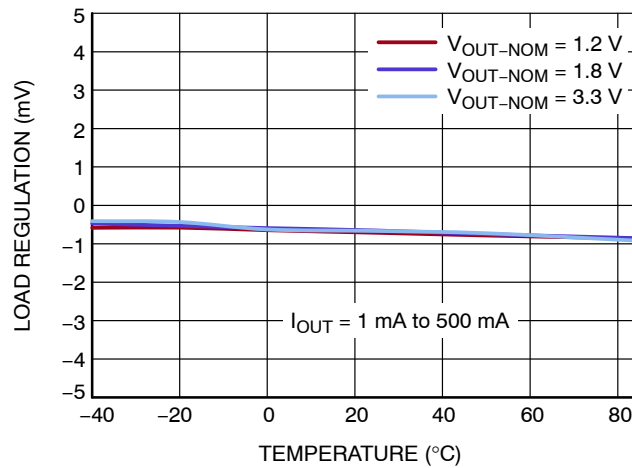


Figure 7. Load Regulation vs. Temperature

# TYPICAL CHARACTERISTICS

$V_{IN} = V_{OUT-NOM} + 1\text{ V}$  ( $V_{OUT-NOM} > 1.5\text{ V}$ ) OR  $V_{IN} = 2.5\text{ V}$  ( $V_{OUT-NOM} \leq 1.5\text{ V}$ ),  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ MF}$ ,  $T_J = 25^\circ\text{C}$ .

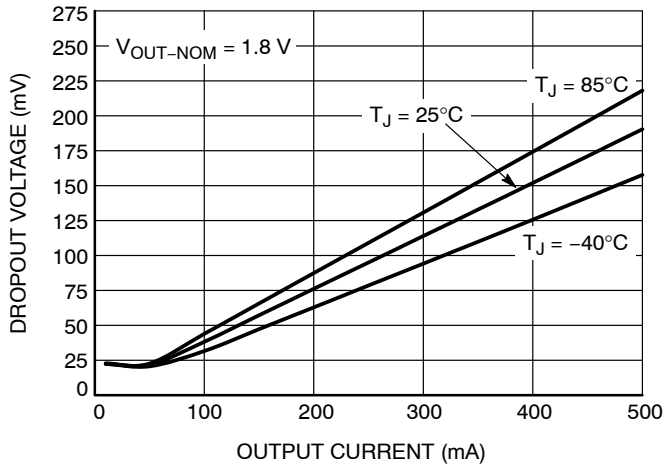


Figure 8. Dropout Voltage vs. Output Current

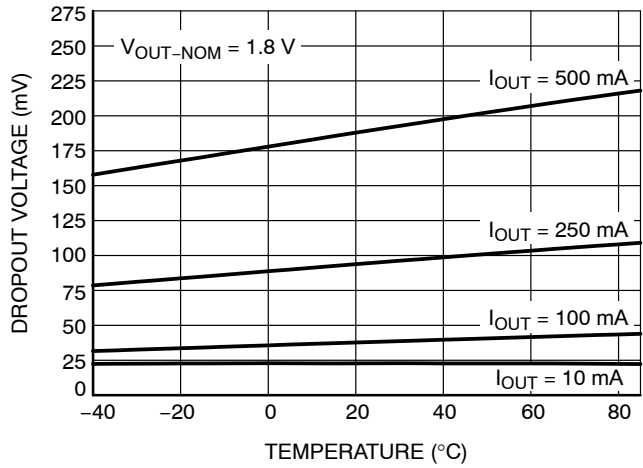


Figure 9. Dropout Voltage vs. Output Current

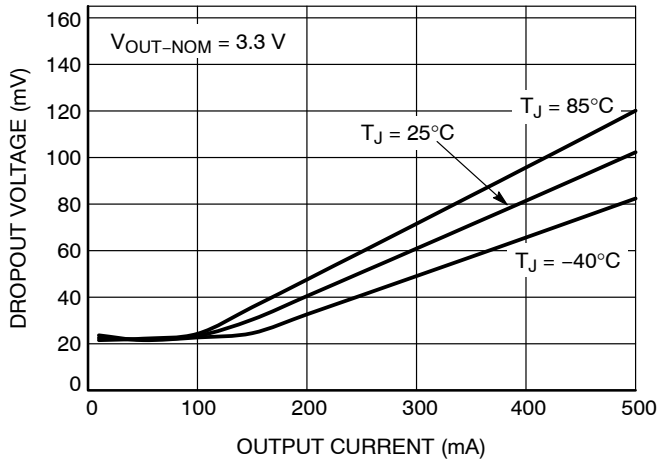


Figure 10. Dropout Voltage vs. Output Current

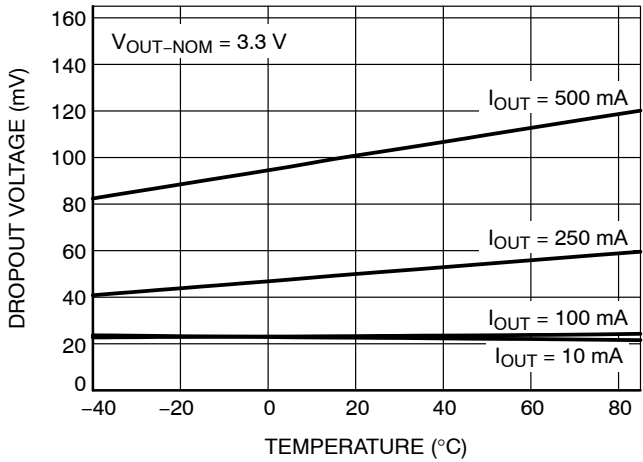


Figure 11. Dropout Voltage vs. Temperature

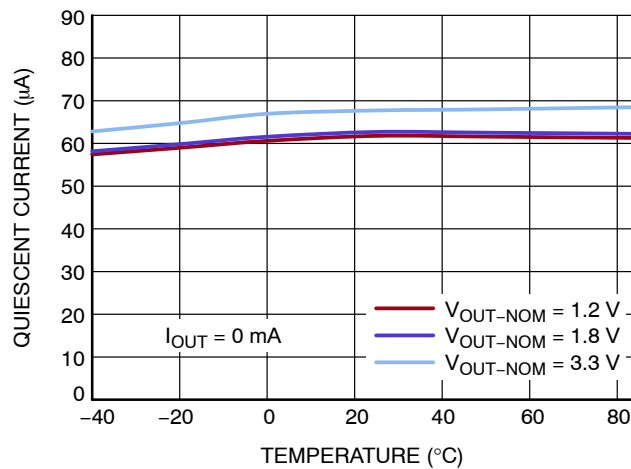


Figure 12. Quiescent Current vs. Temperature

# TYPICAL CHARACTERISTICS

$V_{IN} = V_{OUT-NOM} + 1\text{ V}$  ( $V_{OUT-NOM} > 1.5\text{ V}$ ) OR  $V_{IN} = 2.5\text{ V}$  ( $V_{OUT-NOM} \leq 1.5\text{ V}$ ),  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ MF}$ ,  $T_J = 25^\circ\text{C}$ .

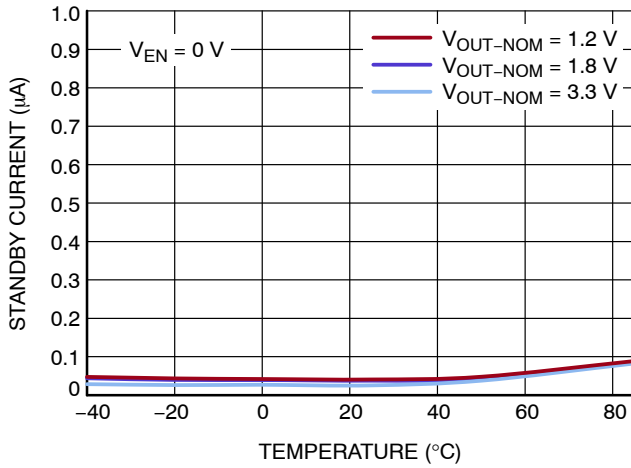


Figure 13. Standby Current vs. Temperature

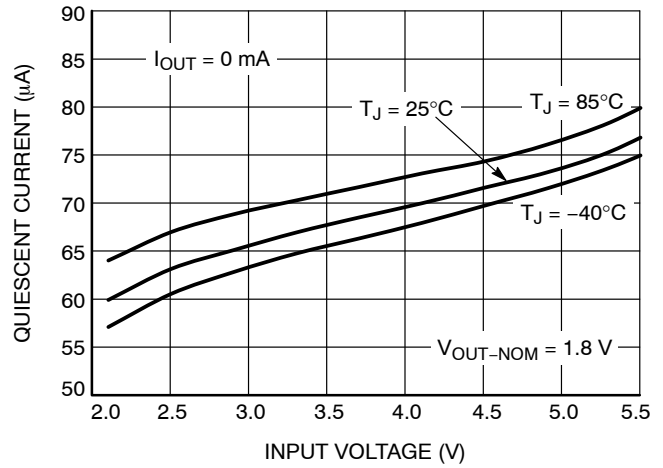


Figure 14. Quiescent Current vs. Input Voltage

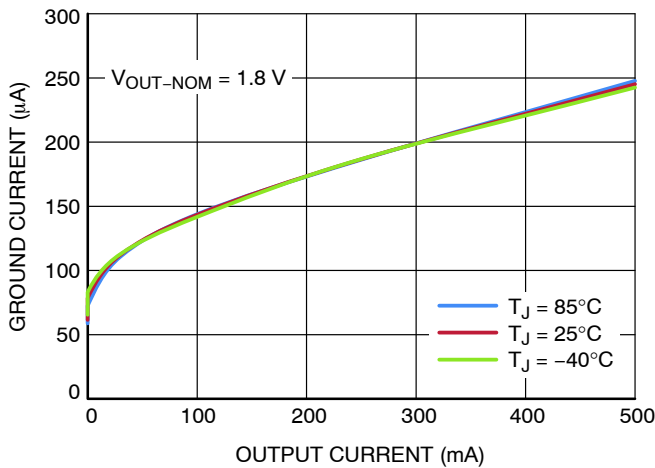


Figure 15. Ground Current vs. Output Current

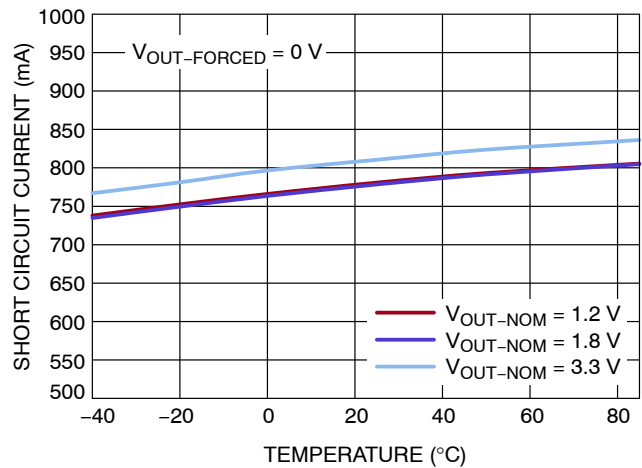


Figure 16. Short Circuit Current vs. Temperature

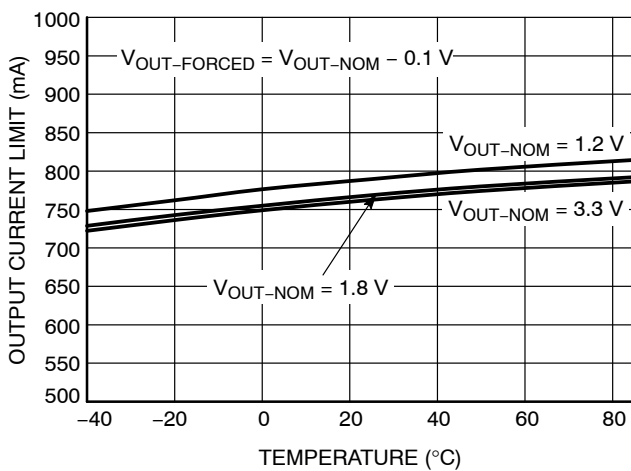


Figure 17. Output Current Limit vs. Temperature

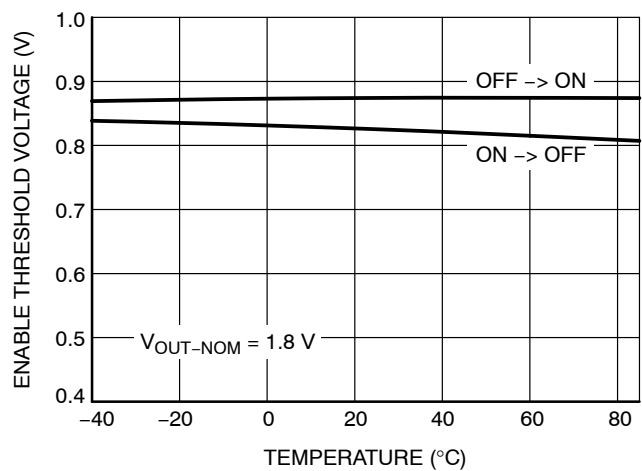


Figure 18. Enable Threshold Voltage vs. Temperature

# NCP176

## TYPICAL CHARACTERISTICS

$V_{IN} = V_{OUT-NOM} + 1\text{ V}$  ( $V_{OUT-NOM} > 1.5\text{ V}$ ) OR  $V_{IN} = 2.5\text{ V}$  ( $V_{OUT-NOM} \leq 1.5\text{ V}$ ),  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ MF}$ ,  $T_J = 25^\circ\text{C}$ .

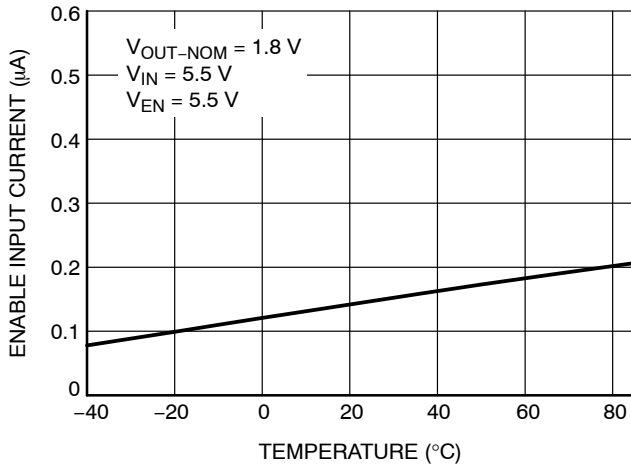


Figure 19. Enable Input Current vs. Temperature

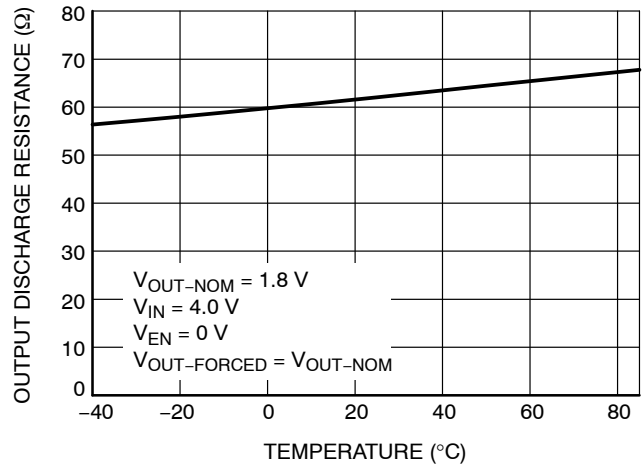


Figure 20. Output Discharge Resistance vs. Temperature (NCP176A option only)

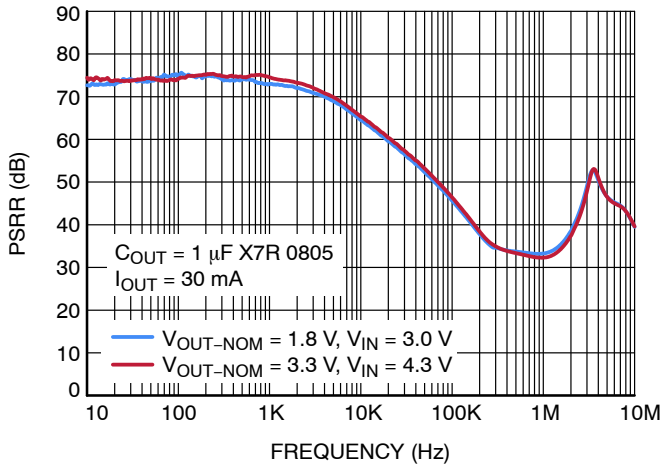


Figure 21. Power Supply Rejection Ratio

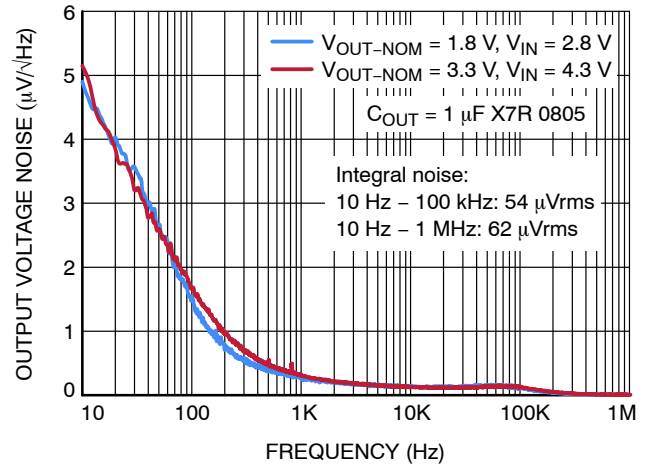


Figure 22. Output Voltage Noise Spectral Density

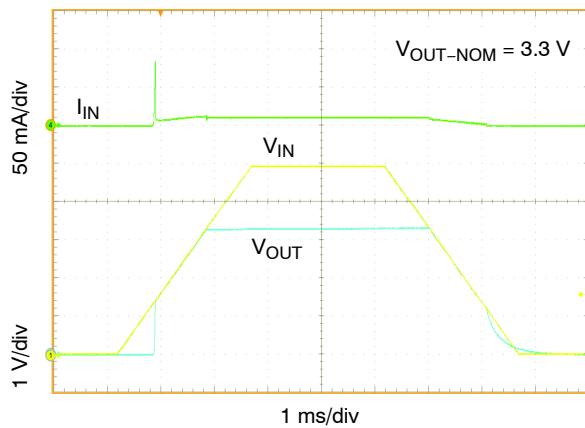


Figure 23. Turn-ON/OFF – VIN driven (slow)

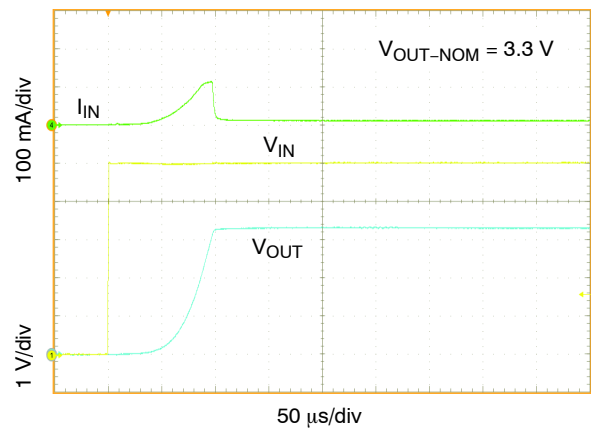


Figure 24. Turn-ON – VIN driven (fast)

# TYPICAL CHARACTERISTICS

$V_{IN} = V_{OUT-NOM} + 1\text{ V}$  ( $V_{OUT-NOM} > 1.5\text{ V}$ ) OR  $V_{IN} = 2.5\text{ V}$  ( $V_{OUT-NOM} \leq 1.5\text{ V}$ ),  $V_{EN} = 1.2\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1.0\text{ MF}$ ,  $T_J = 25^\circ\text{C}$ .

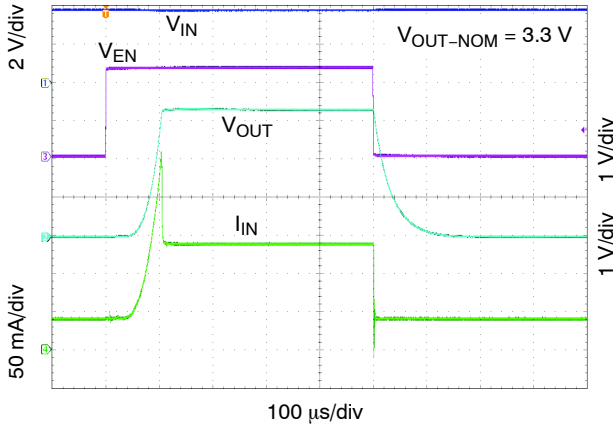


Figure 25. Turn-ON/OFF – EN driven

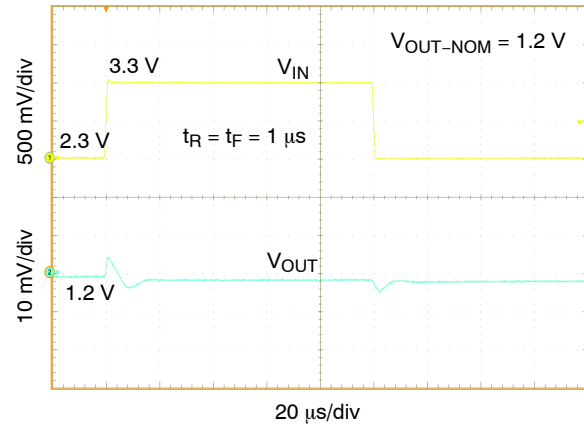


Figure 26. Line Transient Response

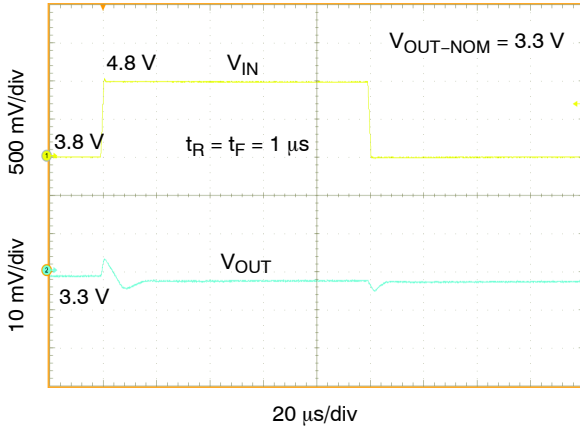


Figure 27. Line Transient Response

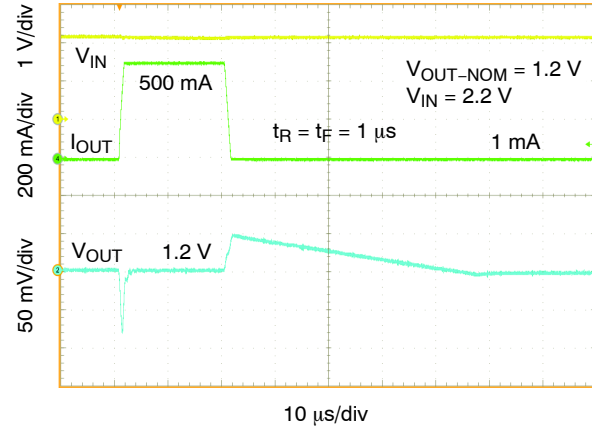


Figure 28. Load Transient Response

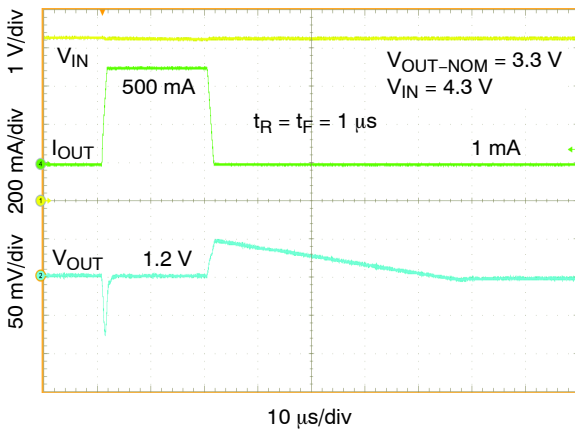


Figure 29. Load Transient Response

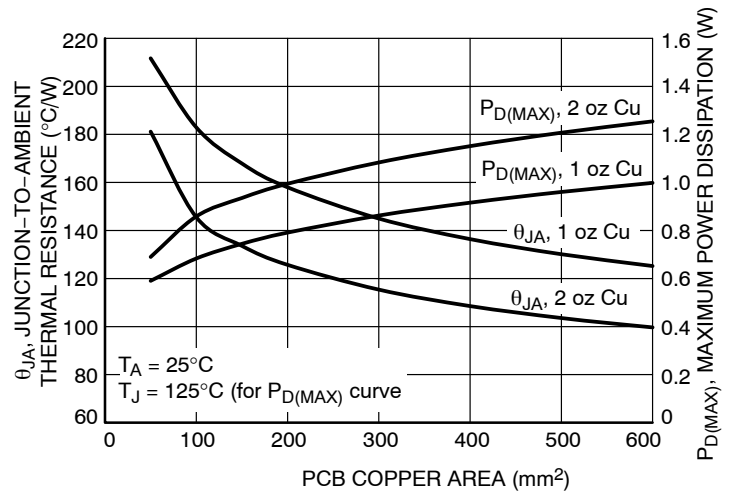


Figure 30.  $\theta_{JA}$  and  $P_{D(MAX)}$  vs. Copper Area

## APPLICATIONS INFORMATION

**General**

The NCP176 is a high performance 500 mA low dropout linear regulator (LDO) delivering excellent noise and dynamic performance. Thanks to its adaptive ground current behavior the device consumes only 60  $\mu$ A of quiescent current (no-load condition).

The regulator features low noise of 48  $\mu$ V<sub>RMS</sub>, PSRR of 75 dB at 1 kHz and very good line/load transient performance. Such excellent dynamic parameters, small dropout voltage and small package size make the device an ideal choice for powering the precision noise sensitive circuitry in portable applications.

A logic EN input provides ON/OFF control of the output voltage. When the EN is low the device consumes as low as 50 nA typ. from the IN pin.

The device is fully protected in case of output overload, output short circuit condition or overheating, assuring a very robust design.

**Input Capacitor Selection (C<sub>IN</sub>)**

Input capacitor connected as close as possible is necessary to ensure device stability. The X7R or X5R capacitor should be used for reliable performance over temperature range. The value of the input capacitor should be 1  $\mu$ F or greater for the best dynamic performance. This capacitor will provide a low impedance path for unwanted AC signals or noise modulated onto the input voltage.

There is no requirement for the ESR of the input capacitor but it is recommended to use ceramic capacitor for its low ESR and ESL. A good input capacitor will limit the influence of input trace inductance and source resistance during load current changes.

**Output Capacitor Selection (C<sub>OUT</sub>)**

The LDO requires an output capacitor connected as close as possible to the output and ground pins. The recommended capacitor value is 1  $\mu$ F, ceramic X7R or X5R type due to its low capacitance variations over the specified temperature range. The LDO is designed to remain stable with minimum effective capacitance of 0.8  $\mu$ F. When selecting the capacitor the changes with temperature, DC bias and package size needs to be taken into account. Especially for small package size capacitors such as 0201 the effective capacitance drops rapidly with the applied DC bias voltage (refer the capacitor's datasheet for details).

There is no requirement for the minimum value of equivalent series resistance (ESR) for the C<sub>OUT</sub> but the maximum value of ESR should be less than 0.5  $\Omega$ . Larger capacitance and lower ESR improves the load transient response and high frequency PSRR. Only ceramic capacitors are recommended, the other types like tantalum capacitors not due to their large ESR.

**Enable Operation**

The LDO uses the EN pin to enable/disable its operation and to deactivate/activate the output discharge function (A-version only).

If the EN pin voltage is < 0.4 V the device is disabled and the pass transistor is turned off so there is no current flow between the IN and OUT pins. On A-version the active discharge transistor is active so the output voltage is pulled to GND through 60  $\Omega$  (typ.) resistor.

If the EN pin voltage is > 1.0 V the device is enabled and regulates the output voltage. The active discharge transistor is turned off.

The EN pin has internal pull-down current source with value of 150 nA typ. which assures the device is turned off when the EN pin is unconnected. In case when the EN function isn't required the EN pin should be tied directly to IN pin.

**Output Current Limit**

Output current is internally limited to a 750 mA typ. The LDO will source this current when the output voltage drops down from the nominal output voltage (test condition is V<sub>OUT-NOM</sub> – 100mV). If the output voltage is shorted to ground, the short circuit protection will limit the output current to 750 mA typ. The current limit and short circuit protection will work properly over the whole temperature and input voltage ranges. There is no limitation for the short circuit duration.

**Thermal Shutdown**

When the LDO's die temperature exceeds the thermal shutdown threshold value the device is internally disabled. The IC will remain in this state until the die temperature decreases by value called thermal shutdown hysteresis. Once the IC temperature falls this way the LDO is back enabled. The thermal shutdown feature provides the protection against overheating due to some application failure and it is not intended to be used as a normal working function.

**Power Dissipation**

Power dissipation caused by voltage drop across the LDO and by the output current flowing through the device needs to be dissipated out from the chip. The maximum power dissipation is dependent on the PCB layout, number of used Cu layers, Cu layers thickness and the ambient temperature. The maximum power dissipation can be computed by following equation:

$$P_{D(MAX)} = \frac{T_J - T_A}{\theta_{JA}} \text{ [W]} \quad (\text{eq. 1})$$

Where (T<sub>J</sub> – T<sub>A</sub>) is the temperature difference between the junction and ambient temperatures and  $\theta_{JA}$  is the thermal resistance (dependent on the PCB as mentioned above).

## NCP176

The power dissipated by the LDO for given application conditions can be calculated by the next equation:

$$P_D = V_{IN} \cdot I_{GND} + (V_{IN} - V_{OUT}) \cdot I_{OUT} [W] \quad (\text{eq. 2})$$

Where  $I_{GND}$  is the LDO's ground current, dependent on the output load current.

Connecting the exposed pad and N/C pin to a large ground planes helps to dissipate the heat from the chip.

The relation of  $\theta_{JA}$  and  $P_{D(MAX)}$  to PCB copper area and Cu layer thickness could be seen on the Figure 30.

### Reverse Current

The PMOS pass transistor has an inherent body diode which will be forward biased in the case when  $V_{OUT} > V_{IN}$ . Due to this fact in cases, where the extended reverse current condition can be anticipated the device may require additional external protection.

### Power Supply Rejection Ratio

The LDO features very high power supply rejection ratio. The PSRR at higher frequencies (in the range above

100 kHz) can be tuned by the selection of  $C_{OUT}$  capacitor and proper PCB layout. A simple LC filter could be added to the LDO's IN pin for further PSRR improvement.

### Enable Turn-On Time

The enable turn-on time is defined as the time from EN assertion to the point in which  $V_{OUT}$  will reach 98% of its nominal value. This time is dependent on various application conditions such as  $V_{OUT-NOM}$ ,  $C_{OUT}$  and  $T_A$ .

### PCB Layout Recommendations

To obtain good transient performance and good regulation characteristics place  $C_{IN}$  and  $C_{OUT}$  capacitors as close as possible to the device pins and make the PCB traces wide. In order to minimize the solution size, use 0402 or 0201 capacitors size with appropriate effective capacitance.

Larger copper area connected to the pins will also improve the device thermal resistance. The actual power dissipation can be calculated from the equation above (Power Dissipation section). Exposed pad and N/C pin should be tied to the ground plane for good power dissipation.

## ORDERING INFORMATION TABLE

| Part Number              | Voltage Option | Marking | Option                   | Package            | Shipping <sup>†</sup>                     |
|--------------------------|----------------|---------|--------------------------|--------------------|-------------------------------------------|
| NCP176AMX100TCG          | 1.0 V          | AA      | With output discharge    | XDFN6<br>(Pb-Free) | 3000 or 5000 /<br>Tape & Reel<br>(Note 8) |
| NCP176AMX120TCG (Note 8) | 1.2 V          | AE      |                          |                    |                                           |
| NCP176AMX180TCG (Note 8) | 1.8 V          | AF      |                          |                    |                                           |
| NCP176AMX300TCG          | 3.0 V          | AC      |                          |                    |                                           |
| NCP176AMX330TCG (Note 8) | 3.3 V          | AD      |                          |                    |                                           |
| NCP176BMX100TCG (Note 8) | 1.0 V          | DA      | Without output discharge |                    |                                           |
| NCP176BMX120TCG (Note 8) | 1.2 V          | DE      |                          |                    |                                           |
| NCP176BMX180TCG (Note 8) | 1.8 V          | DF      |                          |                    |                                           |
| NCP176BMX280TCG (Note 8) | 2.8 V          | DG      |                          |                    |                                           |
| NCP176BMX300TCG          | 3.0 V          | DC      |                          |                    |                                           |
| NCP176BMX330TCG          | 3.3 V          | DD      |                          |                    |                                           |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


8. Product processed after October 1, 2022 are shipped with quantity 5000 units / tape & reel.




SCALE 4:1

**XDFN6 1.20x1.20, 0.40P**  
**CASE 711AT**  
**ISSUE C**


DATE 04 DEC 2015

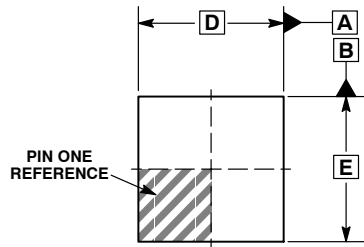


**TOP VIEW**

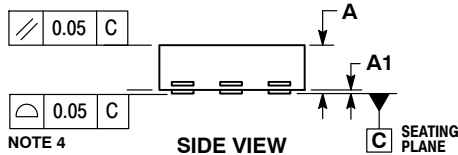

**SIDE VIEW**

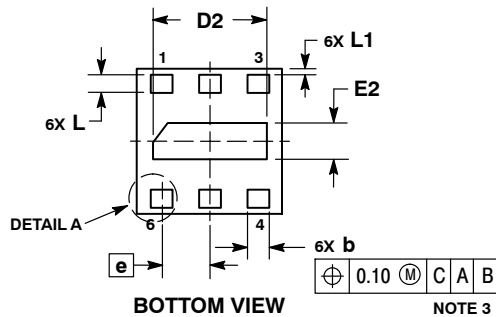

**BOTTOM VIEW**



**DETAIL A**  
**OPTIONAL**  
**CONSTRUCTION**

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO THE PLATED TERMINALS.
4. COPLANARITY APPLIES TO THE PAD AS WELL AS THE TERMINALS.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN         | TYP  | MAX  |
| A   | 0.30        | 0.37 | 0.45 |
| A1  | 0.00        | 0.03 | 0.05 |
| b   | 0.13        | 0.18 | 0.23 |
| D   | 1.15        | 1.20 | 1.25 |
| D2  | 0.84        | 0.94 | 1.04 |
| E   | 1.15        | 1.20 | 1.25 |
| E2  | 0.20        | 0.30 | 0.40 |
| e   | 0.40 BSC    |      |      |
| L   | 0.15        | 0.20 | 0.25 |
| L1  | 0.00        | 0.05 | 0.10 |


**GENERIC MARKING DIAGRAM\***



XX = Specific Device Code  
M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

**RECOMMENDED MOUNTING FOOTPRINT\***



DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, [SOLDERM/D](#).

|                         |                                  |                                                                                                                                                                                  |
|-------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON76141F</b>               | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>XDFN6, 1.20 X 1.20, 0.40P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

**onsemi** and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)