



## 2N5551



## MMBT5551



### NPN General Purpose Amplifier

This device is designed for general purpose high voltage amplifiers and gas discharge display drivers.

#### Absolute Maximum Ratings\*

TA = 25°C unless otherwise noted

| Symbol                            | Parameter                                        | Value       | Units |
|-----------------------------------|--------------------------------------------------|-------------|-------|
| V <sub>CEO</sub>                  | Collector-Emitter Voltage                        | 160         | V     |
| V <sub>CBO</sub>                  | Collector-Base Voltage                           | 180         | V     |
| V <sub>EBO</sub>                  | Emitter-Base Voltage                             | 6.0         | V     |
| I <sub>C</sub>                    | Collector Current - Continuous                   | 600         | mA    |
| T <sub>J</sub> , T <sub>stg</sub> | Operating and Storage Junction Temperature Range | -55 to +150 | °C    |

\*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

#### NOTES:

1) These ratings are based on a maximum junction temperature of 150 degrees C.

2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

#### Thermal Characteristics

TA = 25°C unless otherwise noted

| Symbol           | Characteristic                                | Max        |            | Units       |
|------------------|-----------------------------------------------|------------|------------|-------------|
|                  |                                               | 2N5551     | *MMBT5551  |             |
| P <sub>D</sub>   | Total Device Dissipation<br>Derate above 25°C | 625<br>5.0 | 350<br>2.8 | mW<br>mW/°C |
| R <sub>θJC</sub> | Thermal Resistance, Junction to Case          | 83.3       |            | °C/W        |
| R <sub>θJA</sub> | Thermal Resistance, Junction to Ambient       | 200        | 357        | °C/W        |

\*Device mounted on FR-4 PCB 1.6" X 1.6" X 0.06."

**NPN General Purpose Amplifier**

(continued)

**Electrical Characteristics**

TA = 25°C unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Max | Units |
|--------|-----------|-----------------|-----|-----|-------|
|--------|-----------|-----------------|-----|-----|-------|

**OFF CHARACTERISTICS**

|               |                                       |                                                                                                  |     |          |                     |
|---------------|---------------------------------------|--------------------------------------------------------------------------------------------------|-----|----------|---------------------|
| $V_{(BR)CEO}$ | Collector-Emitter Sustaining Voltage* | $I_C = 1.0 \text{ mA}, I_B = 0$                                                                  | 160 |          | V                   |
| $V_{(BR)CBO}$ | Collector-Base Breakdown Voltage      | $I_C = 100 \text{ } \mu\text{A}, I_E = 0$                                                        | 180 |          | V                   |
| $V_{(BR)EBO}$ | Emitter-Base Breakdown Voltage        | $I_E = 10 \text{ } \mu\text{A}, I_C = 0$                                                         | 6.0 |          | V                   |
| $I_{CBO}$     | Collector Cutoff Current              | $V_{CB} = 120 \text{ V}, I_E = 0,$<br>$V_{CB} = 120 \text{ V}, I_E = 0, T_A = 100^\circ\text{C}$ |     | 50<br>50 | nA<br>$\mu\text{A}$ |
| $I_{EBO}$     | Emitter Cutoff Current                | $V_{EB} = 4.0 \text{ V}, I_C = 0$                                                                |     | 50       | nA                  |

**ON CHARACTERISTICS**

|               |                                      |                                                                                                                                                  |                |              |        |
|---------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|--------|
| $h_{FE}$      | DC Current Gain                      | $I_C = 1.0 \text{ mA}, V_{CE} = 5.0 \text{ V}$<br>$I_C = 10 \text{ mA}, V_{CE} = 5.0 \text{ V}$<br>$I_C = 50 \text{ mA}, V_{CE} = 5.0 \text{ V}$ | 80<br>80<br>30 | 250          |        |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA}$<br>$I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$                                                       |                | 0.15<br>0.20 | V<br>V |
| $V_{BE(sat)}$ | Base-Emitter Saturation Voltage      | $I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA}$<br>$I_C = 50 \text{ mA}, I_B = 5.0 \text{ mA}$                                                       |                | 1.0<br>1.0   | V<br>V |

**SMALL SIGNAL CHARACTERISTICS**

|           |                                  |                                                                                                                                  |     |     |     |
|-----------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|
| $f_T$     | Current Gain - Bandwidth Product | $I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V},$<br>$f = 100 \text{ MHz}$                                                           | 100 | 300 | MHz |
| $C_{obo}$ | Output Capacitance               | $V_{CB} = 10 \text{ V}, I_E = 0,$<br>$f = 1.0 \text{ MHz}$                                                                       |     | 6.0 | pF  |
| $C_{ibo}$ | Input Capacitance                | $V_{BE} = 0.5 \text{ V}, I_C = 0,$<br>$f = 1.0 \text{ MHz}$                                                                      |     | 20  | pF  |
| $h_{fe}$  | Small-Signal Current Gain        | $I_C = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$<br>$f = 1.0 \text{ kHz}$                                                          | 50  | 250 |     |
| NF        | Noise Figure                     | $I_C = 250 \text{ } \mu\text{A}, V_{CE} = 5.0 \text{ V},$<br>$R_S = 1.0 \text{ k}\Omega, f = 10 \text{ Hz to } 15.7 \text{ kHz}$ |     | 8.0 | dB  |

\*Pulse Test: Pulse Width  $\leq 300 \text{ } \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ **Spice Model**


NPN (Is=2.511f Xti=3 Eg=1.11 Vaf=100 Bf=242.6 Ne=1.249 Ise=2.511f Ikf=.3458 Xtb=1.5 Br=3.197 Nc=2 Isc=0  
Ikr=0 Rc=1 Cjc=4.883p Mjc=.3047 Vjc=.75 Fc=.5 Cje=18.79p Mje=.3416 Vje=.75 Tr=1.202n Tf=560p Itf=50m  
Vtf=5 Xtf=8 Rb=10)

# NPN General Purpose Amplifier (continued)


2N5551 / MMBT5551

## Typical Characteristics


Typical Pulsed Current Gain  
vs Collector Current

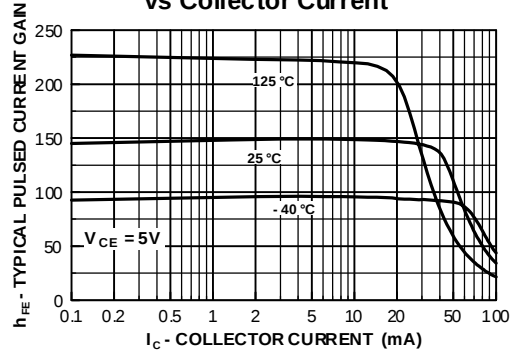


Collector-Emitter Saturation  
Voltage vs Collector Current

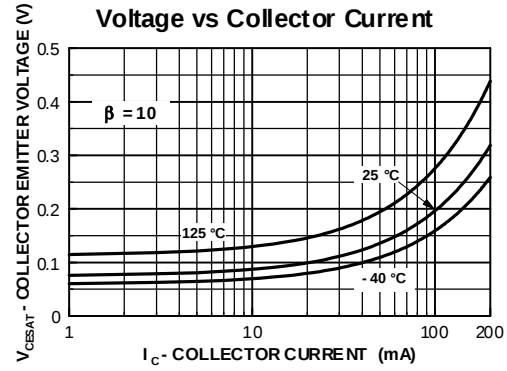


Base-Emitter Saturation  
Voltage vs Collector Current

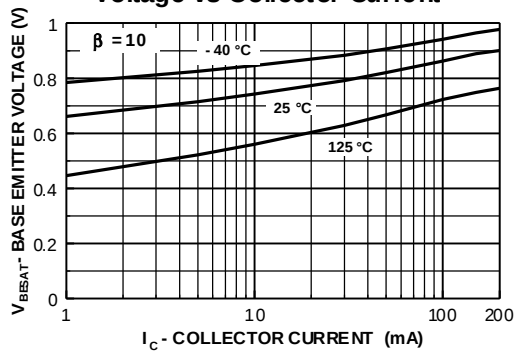


Base Emitter ON Voltage vs  
Collector Current

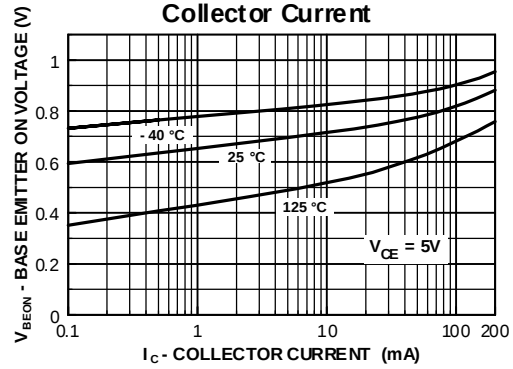

Collector-Cutoff Current  
vs. Ambient Temperature

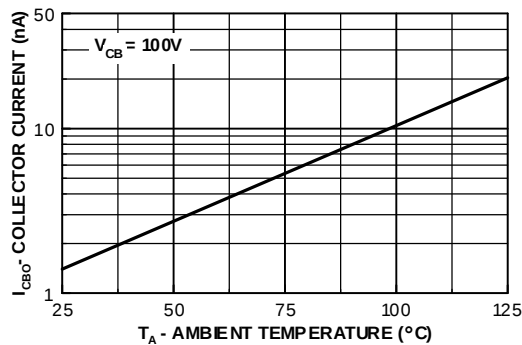

Collector-Emitter Breakdown  
Voltage with Resistance  
Between Emitter-Base

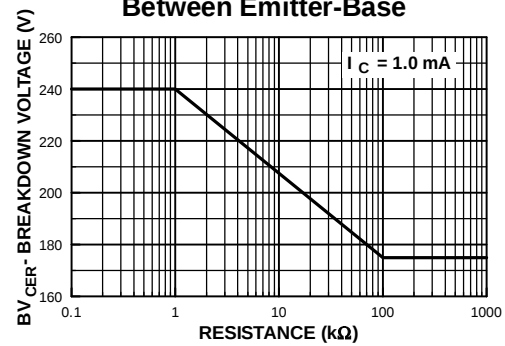


# NPN General Purpose Amplifier

(continued)


2N5551 / MMBT5551

## Typical Characteristics (continued)


Input and Output Capacitance  
vs Reverse Voltage

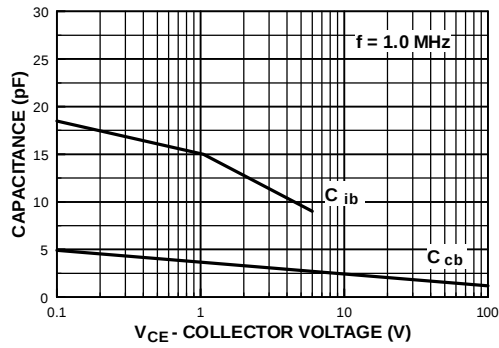

Small Signal Current Gain  
vs Collector Current

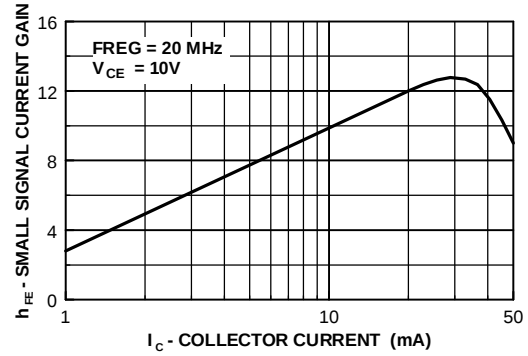

Power Dissipation vs  
Ambient Temperature

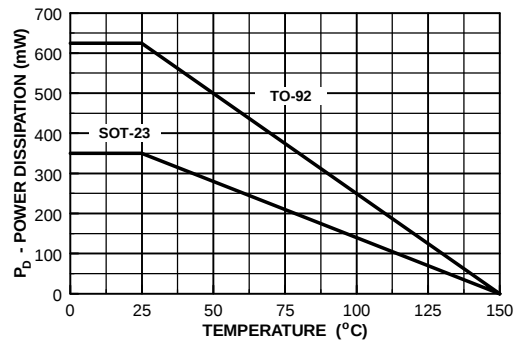

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                  |                                 |                                 |                        |
|----------------------------------|---------------------------------|---------------------------------|------------------------|
| ACE <sup>™</sup>                 | FAST <sup>™</sup>               | PowerTrench <sup>®</sup>        | SyncFET <sup>™</sup>   |
| Bottomless <sup>™</sup>          | GlobalOptoisolator <sup>™</sup> | QFET <sup>™</sup>               | TinyLogic <sup>™</sup> |
| CoolFET <sup>™</sup>             | GTO <sup>™</sup>                | QS <sup>™</sup>                 | UHC <sup>™</sup>       |
| CROSSVOLT <sup>™</sup>           | HiSeC <sup>™</sup>              | QT Optoelectronics <sup>™</sup> | VCX <sup>™</sup>       |
| DOVE <sup>™</sup>                | ISOPLANAR <sup>™</sup>          | Quiet Series <sup>™</sup>       |                        |
| E <sup>2</sup> CMOS <sup>™</sup> | MICROWIRE <sup>™</sup>          | SILENT SWITCHER <sup>®</sup>    |                        |
| EnSigna <sup>™</sup>             | OPTOLOGIC <sup>™</sup>          | SMART START <sup>™</sup>        |                        |
| FACT <sup>™</sup>                | OPTOPLANAR <sup>™</sup>         | SuperSOT <sup>™</sup> -3        |                        |
| FACT Quiet Series <sup>™</sup>   | PACMAN <sup>™</sup>             | SuperSOT <sup>™</sup> -6        |                        |
| FAST <sup>®</sup>                | POP <sup>™</sup>                | SuperSOT <sup>™</sup> -8        |                        |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                                            |
|--------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                                    |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.                                                       |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                                   |