




NPN Silicon power darlington transistors are designed for use in automotive ignition. Switching and motor control applications.

Features:

- Collector-emitter sustaining voltage
 $V_{CEO(SUS)} = 400V$ (minimum).
- Collector-emitter saturation voltage
 $V_{CE(sat)} = 2.0V$ (maximum) at $I_C = 5.0A$.
- Reverse-base SOA at 300V to 400V at 7A.

Dimensions	Minimum	Maximum
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90


Dimensions : Millimetres

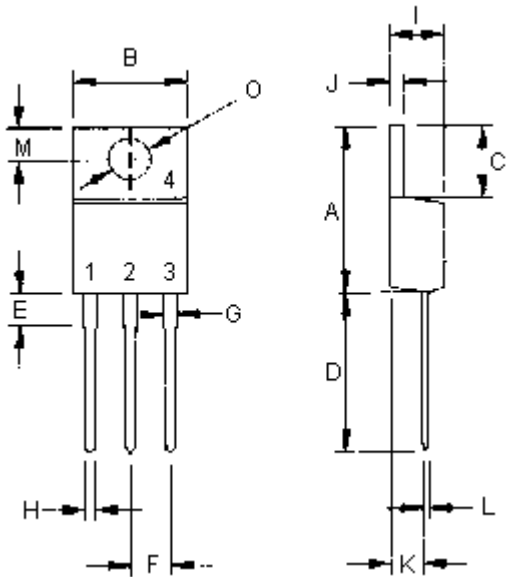

- Pin 1. Base
2. Collector
3. Emitter
4. Collector(Case)

NPN
TIP152

7 Ampere
Darlington
Power Transistors
300 to 400 Volts
80 Watts




TO-220

Maximum Ratings

Parameter	Symbol	TIP152	Unit
Collector-Emitter Voltage	V_{CEO}	400	V
Collector-Base Voltage	V_{CBO}		
Emitter-Base Voltage	V_{EBO}	8.0	
Collector Current-Continuous -Peak	I_C	7.0	A
	I_{CM}	1.0	
Base Current	I_B	1.5	
Total Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	80 0.64	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150	$^\circ\text{C}$

Thermal Characteristics

Characteristic	Symbol	Maximum	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.56	$^\circ\text{C/W}$

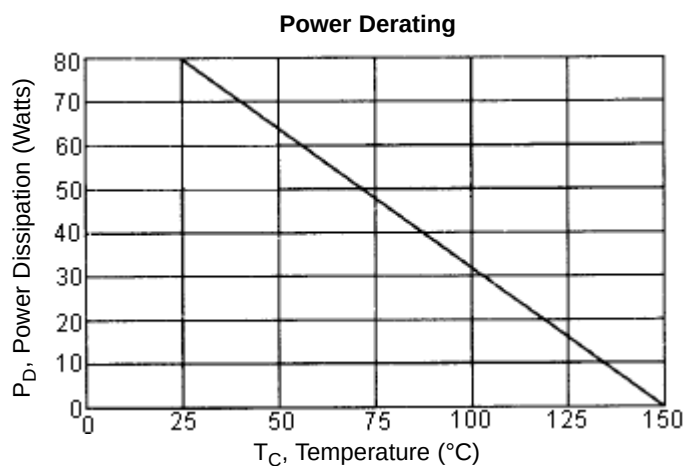


Electrical Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Minimum	Maximum	Unit	
Off Characteristics					
Collector-Emitter Breakdown Voltage (1) (I _C = 10mA, I _B = 0) TIP152	V _{(BR) CEO}	400	-	V	
Collector-Base Breakdown Voltage (1) (I _C = 1.0mA, I _B = 0) TIP152	V _{(BR) CBO}		-		
Collector Cut off Current (V _{CE} = 400V, I _B = 0) TIP152	I _{CEO}	-	250	μA	
Emitter Cut off Current (V _{EB} = 8.0V, I _C = 0)	I _{EBO}	-	15	mA	
On Characteristics (1)					
DC Current Gain (I _C = 2.5A, V _{CE} = 5.0V) (I _C = 5.0A, V _{CE} = 5.0V) (I _C = 7.0A, V _{CE} = 5.0V)	h _{FE}	150 50 15	-	-	
Collector-Emitter Saturation Voltage (I _C = 1.0A, I _B = 10mA) (I _C = 2.0A, I _B = 100mA) (I _C = 5.0A, I _B = 250mA)	V _{CE (sat)}	-	1.5 1.5 2.0	V	
Base-Emitter Saturation Voltage (I _C = 2.0A, I _B = 100mA) (I _C = 5.0A, I _B = 250mA)	V _{BE (sat)}	-	2.2 2.3		
Diode Forward Voltage (I _F = 7.0A)	V _F	-	3.5		
Dynamic Characteristics					
Small-Signal Current Gain (I _C = 0.5A, V _{CE} = 5.0V, f = 1.0KHz)	h _{fe}	200	-	-	
Output Capacitance (V _{CB} = 10V, I _E = 0, f = 1.0MHz)	C _{ob}	-	150	pF	
Switching Characteristics					
Delay Time	V _{CC} = 250V, I _C = 5.0A I _{B1} = -I _{B2} = 250mA, tp = 200μS, Duty Cycle ≤2.0%	t _d	30 (Typical)	-	ns
Rise Time		t _r	180 (Typical)	-	
Storage Time		t _s	3.5 (Typical)	-	μs
Fall Time		t _f	1.6 (Typical)	-	

(1) Pulse Test : Pulse width: $\leq 300\mu\text{s}$, Duty Cycle $\leq 2.0\%$.


DC Current Gain

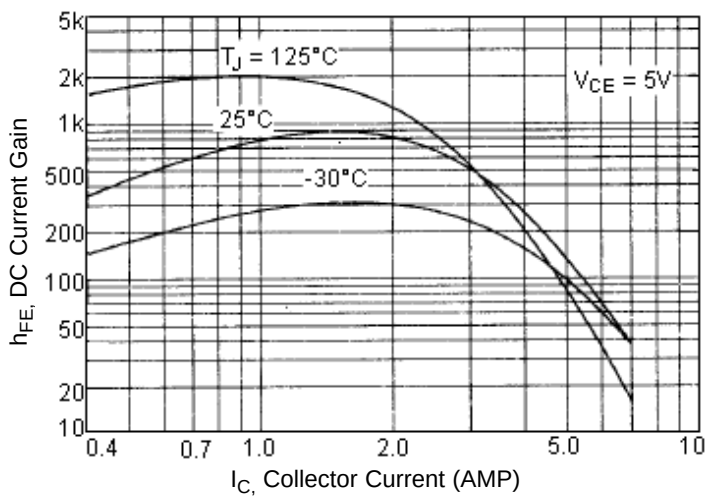


Base-Emitter Voltage

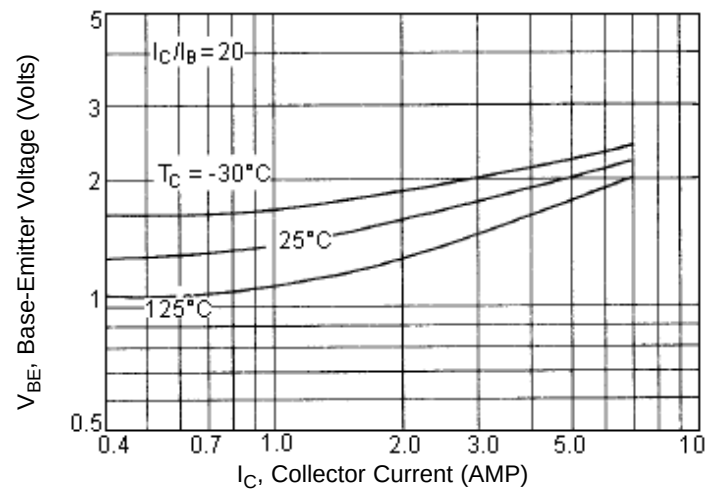


Collector-Emitter Saturation Voltage

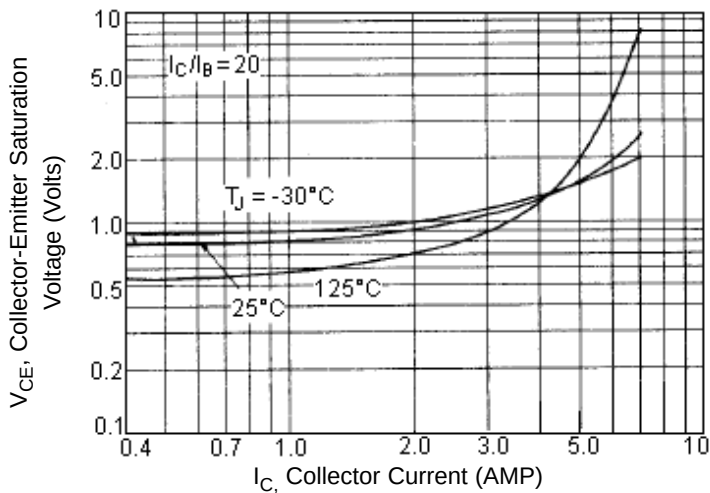

Reverse Bias Safe Operating Area

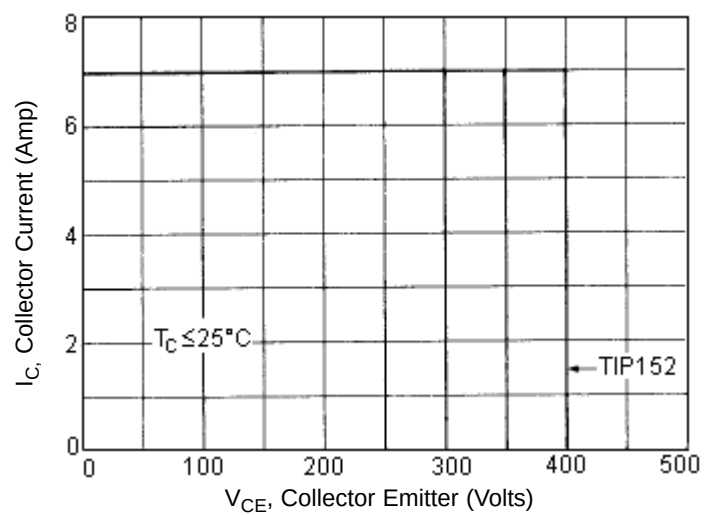

Active Region Safe Operating Area

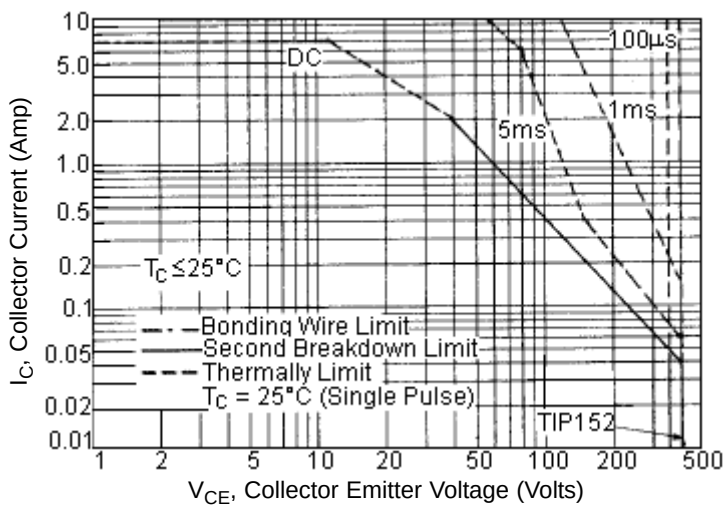

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of curve is base on $T_{J(PK)} = 150^\circ\text{C}$; T_C is variable depending on power level. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Part Number Table

Description	Part Number
Darlington Transistor, TO-220	TIP152

Notes:

International Sales Offices:



AUSTRALIA - Farnell

Tel No: ++61 1300 361 005
Fax No: ++61 1300 361 225



FINLAND - Farnell

Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



ITALY - Farnell

Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN - Farnell

Tel No: 901 20 20 80
Fax No: 901 20 20 90



AUSTRIA - Farnell

Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE - Farnell

Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



MALAYSIA - Farnell-Newark

Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN - Farnell

Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62



BELGIUM - Farnell

Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY - Farnell

Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NETHERLANDS - Farnell

Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND - Farnell

Tel No: ++ 44 204 64 64
Fax No: ++ 44 204 64 54



BRAZIL - Farnell-Newark

Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG - Farnell-Newark

Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



NEW ZEALAND - Farnell

Tel No: 0800 90 80 80
Fax No: 0800 90 80 81



UK - Farnell

Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



CHINA - Farnell-Newark

Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



HUNGARY - Farnell

Tel No: ++ 44 870 1200 208
Fax No: ++ 44 870 1200 209



NORWAY - Farnell

Tel No: 800 146 70
Fax No: 800 146 76



UK - CPC

++ 44 8701 202 530
++ 44 8701 202 531



CZECH REPUBLIC - Farnell

Tel No: ++ 44 870 1200 208
Fax No: ++ 44 870 1200 209



INDIA - Farnell

Tel No: ++ 44 870 1200 208
Fax No: ++ 44 870 1200 209



PORTUGAL - Farnell

Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



USA - Newark

Tel No: 800 463 9275



DENMARK - Farnell

Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



IRELAND - Farnell

Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



RUSSIA - Farnell

Tel No: ++ 44 870 1200 208
Fax No: ++ 44 870 1200 209



EXPORT - Farnell

Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



ESTONIA - Farnell

Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



ISRAEL - Farnell

Tel No: ++ 180 937 0015
Fax No: ++ 180 937 0014



SINGAPORE - Farnell-Newark

Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300

<http://www.farnell.com>
<http://www.newark.com>
<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.