



## IF Filters for Cordless Phones and ISM-Band Application

**Series/Type:** B8100

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39111B8100L100	B39111B4542Z910	2004-05-19	2004-09-30	2004-12-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).



## Withdrawn Products

The following products presented in this data sheet are being withdrawn:

B39111B8100L100

Date of withdrawal: 19-MAY-04

Deadline for last orders: 30-SEP-04

Last shipments: 31-DEC-04

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of the sales offices are given on the Internet at [www.epcos.com/sales](http://www.epcos.com/sales).



# SAW Components

Data Sheet B 8100

Data Sheet




EPCOS

duroplast package **DIP18D**
**Features**

- IF filter for cordless application
- Channel selection in DECT system
- Low group delay ripple
- **Surface Mounted Technology (SMT)**
- Standard IC small outline (SO) package
- Balanced and unbalanced operation possible

**Terminals**


- Tinned CuFe alloyv

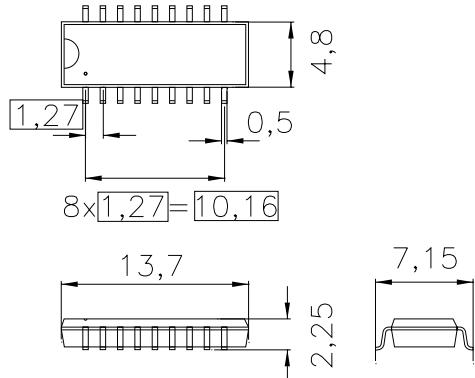

Dimensions in mm, approx. weight 0,4 g

**Pin configuration**

7	Input
8	Input ground or balanced input
16	Output
17	Output ground or balanced output
1,4,5,6,9,10	Chip carrier – ground
13,14,15,18	
2,3,11,12	not connected



Type	Ordering code	Marking and Package according to	Packing according to
B8100	B39111-B8100-L100	C61157-A2-A4	F61074-V8058-Z000

**Electrostatic Sensitive Device (ESD)**
**Maximum ratings**

Operable temperature range	$T$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	
Source power	$P_s$	10	dBm	

**SAW Components**
**B 8100**
**Bandpass Filter**
**110,59 MHz**
**Data Sheet**
**Characteristics**

Operating temperature range:

 $T = +25^\circ\text{C}$ 


Terminating source impedance:



 $Z_S = 50\Omega (600\Omega \parallel 240\text{ nH}^*)$ 

Terminating load impedance:

 $Z_L = 50\Omega (140\Omega \parallel 110\text{ nH}^*)$ 

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	110,59	—	MHz
<b>Center frequency</b> (center frequency between 10 dB points)	$f_c$	110,48	110,59	110,70	MHz
<b>Insertion attenuation at <math>f_N</math></b> (including losses in matching network)	$\alpha_N$	—	20,9 (13,5*)	22,4 (15,0*)	dB
<b>Passband width</b>	$B_{3\text{dB}}$	—	1,28	—	MHz
	$B_{30\text{dB}}$	—	2,40	—	MHz
<b>Group delay ripple (p-p)</b>	$\Delta\tau$				
$f_N - 600\text{ kHz}$ ... $f_N + 600\text{ kHz}$		—	180 (300*)	250 (400*)	ns
<b>Relative attenuation (relative to <math>\alpha_N</math>)</b>	$\alpha_{\text{rel}}$				
$f_N - 576\text{ kHz}$ ... $f_N + 576\text{ kHz}$		—	2,0	4,0	dB
$f_N \pm 576\text{ kHz}$ ... $f_N \pm 700\text{ kHz}$		—	—	10,0	dB
$f_N \pm 1,6\text{ MHz}$ ... $f_N \pm 3,1\text{ MHz}$		32	38	—	dB
$f_N \pm 3,1\text{ MHz}$ ... $f_N \pm 4,6\text{ MHz}$		40	44	—	dB
$f_N \pm 4,6\text{ MHz}$ ... $f_N \pm 20\text{ MHz}$		45	50	—	dB
$f_N \pm 1,728\text{ MHz}$		32	38	—	dB
$f_N \pm 2 \times 1,728\text{ MHz}$		42	47	—	dB
$f_N \pm 3 \times 1,728\text{ MHz}$		48	53	—	dB
<b>Impedance at <math>f_N</math></b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	600 $\parallel$ 8,5	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	140 $\parallel$ 19,0	—	$\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency</b>	$TC_f$	—	- 18	—	ppm/K

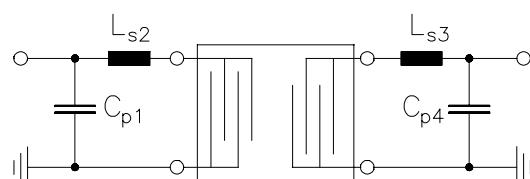 \*) with matching network to  $50\Omega$  (element values depend on PCB layout):

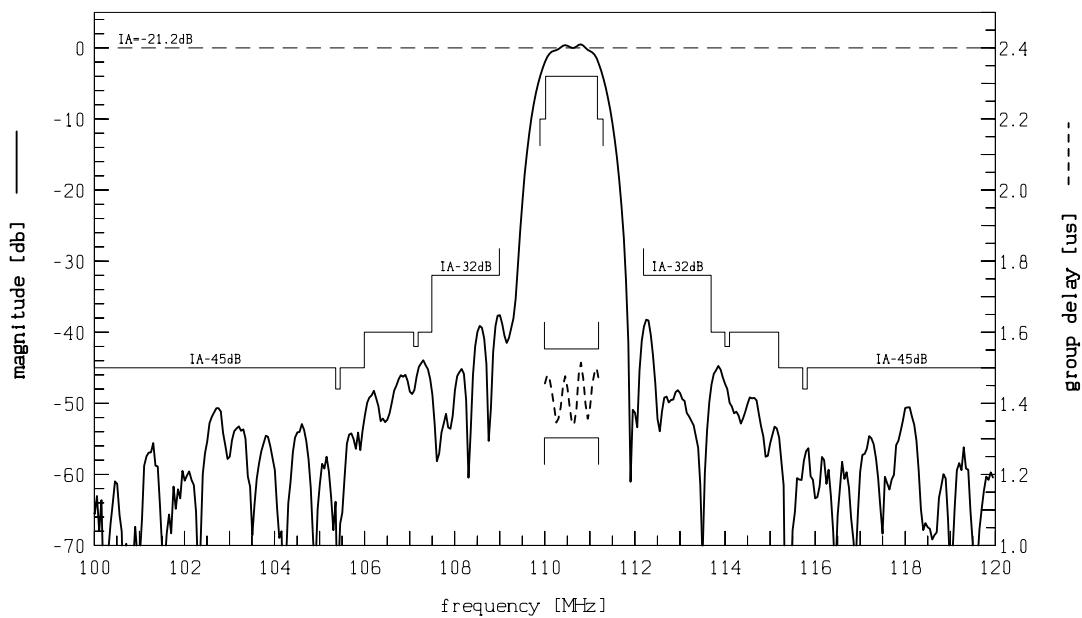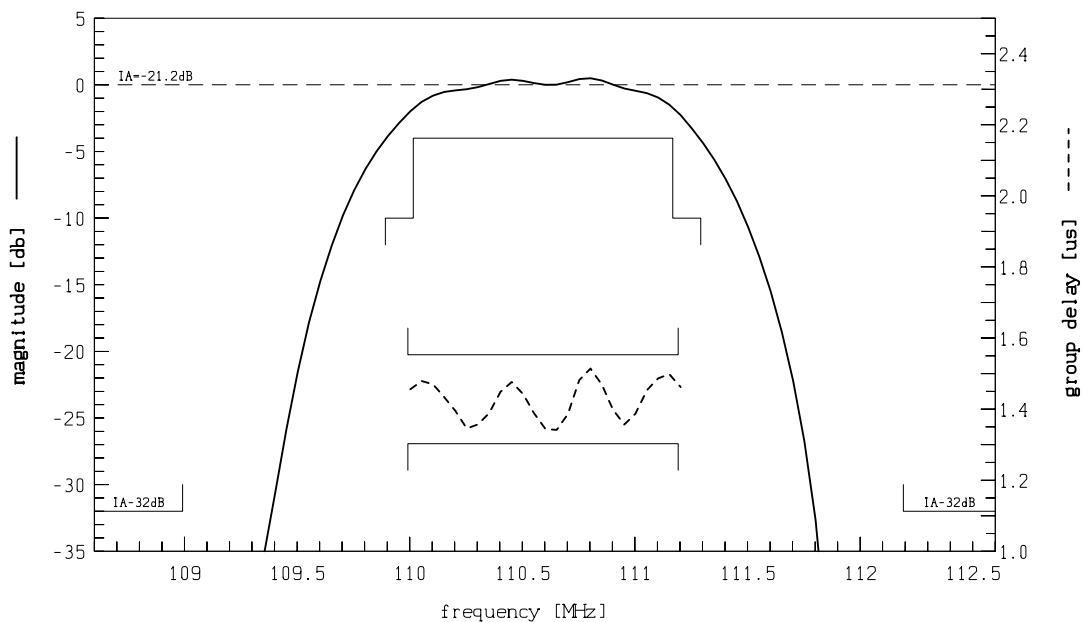 $C_{p1} = 0\text{ pF}$   
 $L_{s2} = 220\text{ nH}$   
 $L_{s3} = 120\text{ nH}$   
 $C_{p4} = 22\text{ pF}$

**SAW Components**
**B 8100**
**Bandpass Filter**
**110,59 MHz**
**Data Sheet**
**Transfer function:**

**Transfer function (pass band):**




## SAW Components

B 8100

## Bandpass Filter



110,59 MHz

## Data Sheet



### **Recommended Pin Configurations:**

For optimum performance use the following pin configurations.



### Balanced-balanced operation:

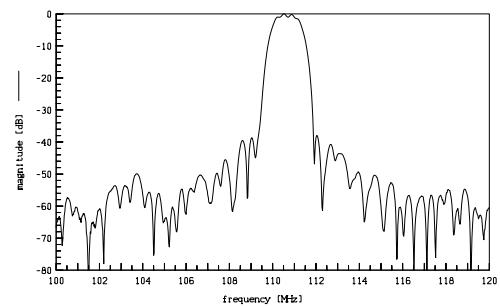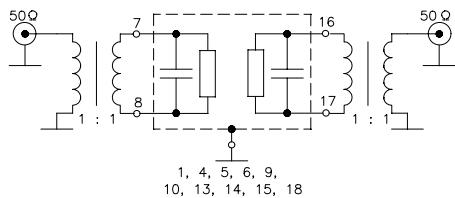

### Balanced-unbalanced operation:

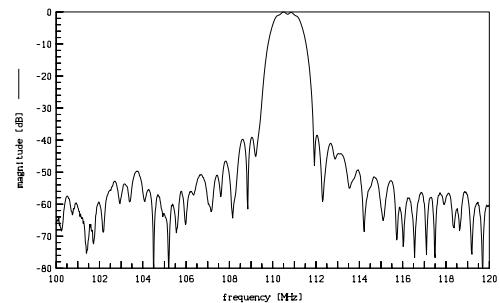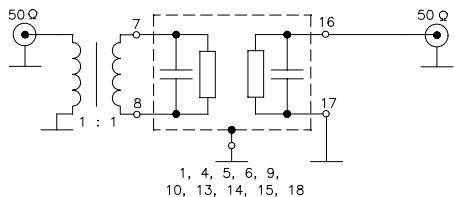


### Unbalanced-unbalanced operation

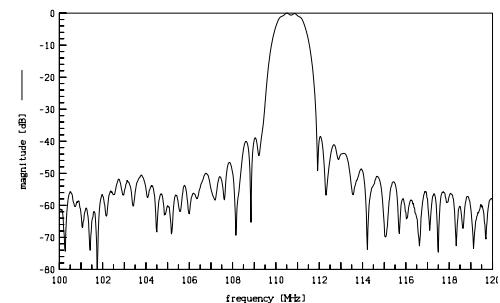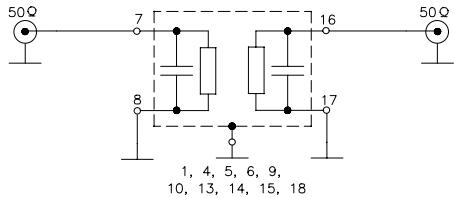


**Matching Stability / Variation of the Matching Network:**

All matching-elements changed by  $\pm 10\%$  (simulation).

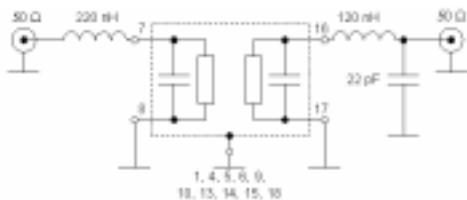


Transfer function of matched filter ( $S_{21}$ ):

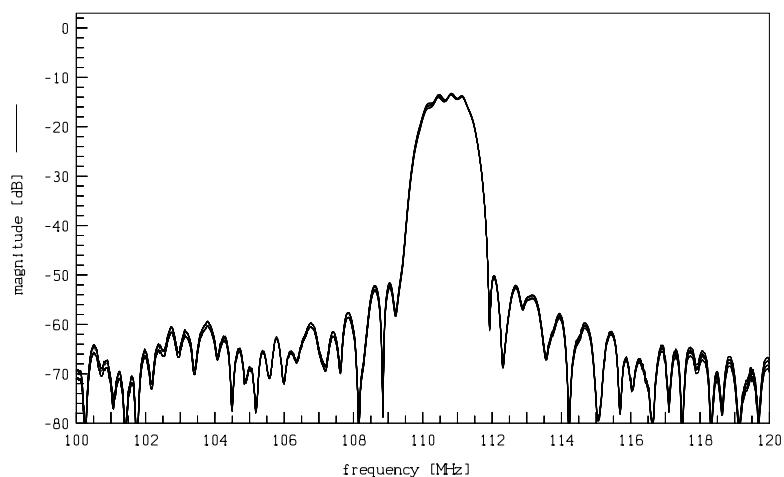

Impedance variation of matched filter (in passband):

$S_{11}$ :

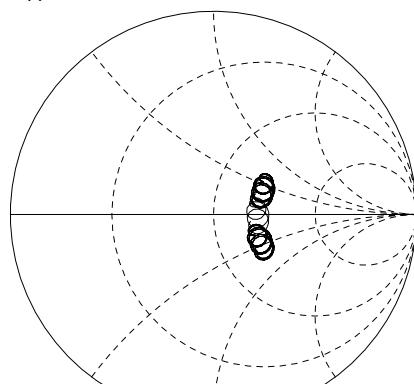

$S_{22}$ :

