

CC Fuse Holders - 600 Volt

Specifications:

30 Amp

- Tested and Approved for 200,000 Amp Withstand Rating and Short Circuit Withstand Rating
- Clip, Copper Alloy, Tin Plated with Patented Reject Member
- Quick Connect Standard with Screw (S) or Sems Pressure (SP)
- For box connectors, internal hex screw option is available
- UL Listed File No. IZLT.E35113
- CSA Certified File No. LR21455
- **CE**
- RoHS Compliant

60 Amp

- Tested and Approved for 200,000 Amp Withstand Rating and Short Circuit Withstand Rating
- Cool-Clip® Design
- Clip, Copper Alloy, Tin Plated
- Integral DIN Rail Mount
- Expander Block Available
- For box connectors, internal hex screw option is available
- UL Listed File No. IZLT2.E35113, Class CD
- CSA Certified File No. LR21455-91
- **CE**
- RoHS Compliant



6CC30A3SQ



6CC30A3B



R6CC60A3B


Catalog #:

Replace "X" with # of poles (E = Expander)

Standard	Reinforced	Poles (X)	Amps	Base Materials	Wire Range	Fuse Size	Fuses
6CC30AXSQ	N/A	1/2/3	30	Thermoplastic	#10-#22 AWG CU	CLASS CC ONLY	ATDR, ATMR
6CC30AXSPQ					#10-#14 AWG CU		ATQR, CCMR
6CC30AXB					#6-#14 AWG CU		FNQ-R
6CC30AXBCU							KLDR, KLKR, KTK-R, LP-CC
R6CC60AXB	SAME	1/2/3/E	60		#2-#14 AWG CU #2-#12 AWG AL	0.70" DIA BY 1.85"	CCMR

See pages 33-34 for available covers
See page 35 for DIN Rail Adapter

Copper Box Connectors are available on 30 and 60 amp fuse holders.
Add CU after the catalog number.

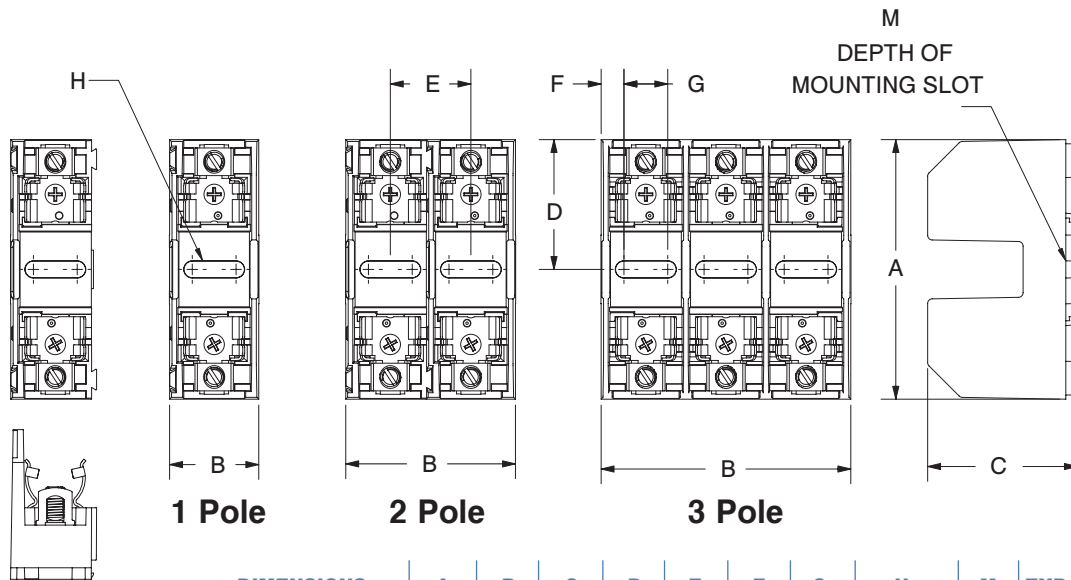

Expander

DIMENSIONS		A	B	C	D	E	F	G	H	M	EXPANDER
6CC30A	1 POLE		0.85						.18 X .59		
	2 POLE	3.13	1.60	1.29	1.56	0.75	0.24	0.38	SLOT	0.09	NO
	3 POLE		2.35								
R6CC60A	1 POLE		1.11						.18 X .74		
	2 POLE	3.35	2.12	1.89	1.68	1.01	0.27	0.57	SLOT	0.09	YES
	3 POLE		3.12								

mm = dim X 25.4

For electronic drawings or 2D/3D CAD data, submit request at www.marathonsp.com/drawings.html