


Time-Delay Ferrule Fuse

FNM

13/32" x 1-1/2"

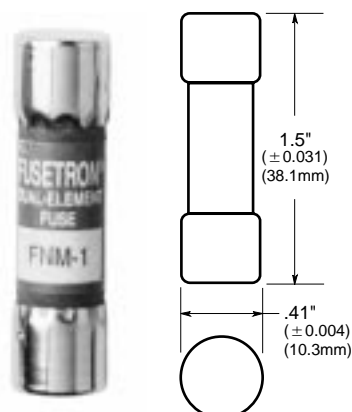

- Fibre tube.
- For circuits with high inrush currents.
- Formerly designated 5AB.
- Fusetron® Dual-Element fuse.

Fuseblock Catalog Numbers

Poles	Terminal Type		
	Screw With Quick Connect	Pressure Plate w/Quick Connect	Box Lug
1	BM6031SQ	BM6031PQ	BM6031B
2	BM6032SQ	BM6032PQ	BM6032B
3	BM6033SQ	BM6033PQ	BM6033B

CATALOG SYMBOL: FNM

TIME-DELAY

1/10 TO 30 AMPERES

INTERRUPTING RATING - SEE CHART BELOW

UL LISTED: STD. 248-14, 0-10/250V AC; 12-15/125V AC

FILE #E19180, GUIDE #JDYX

CSA CERTIFIED: 1-10/250V AC; CLASS 1422-01,

12-15/125V AC; FILE 53787

DC RATING: 1-15A rated 125V DC and 1.6 KAIC.

Electrical Ratings (Catalog Symbol and Amperes)

250 Volts AC	IR	250 Volts AC	IR	250 Volts AC	IR	125 Volts AC
FNM-1/10		FNM-1-1/8		FNM-4		FNM-12 10,000
FNM-1/8		FNM-1-1/4		FNM-4-1/2		FNM-15 @ 125V AC
FNM-15/100		FNM-1-4/10		FNM-5		-
FNM-2/10		FNM-1-1/2		FNM-5-6/10		-
FNM-1/4	35A @	FNM-1-6/10	100A @	FNM-6		32 Volts AC
FNM-3/10	250VAC	FNM-1-8/10	250VAC	FNM-6-1/4	200A @	FNM-20
FNM-4/10	10,000	FNM-2	10,000	FNM-7	250VAC	FNM-25
FNM-1/2	@	FNM-2-1/4	@	FNM-8	10,000 @	FNM-30
FNM-6/10	125VAC	FNM-2-1/2	125VAC	FNM-9	125VAC	-
FNM-3/4		FNM-2-8/10		FNM-10		-
FNM-8/10		FNM-3		-		-
FNM-1		FNM-3-2/10		-		-
-		FNM-3-1/2		-		-

If 250V AC is needed for 12-30 amps, use FNW series.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight	
		Lbs.	Kg.
0-30	10	.125	.057


CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Time-Delay Ferrule Fuse

13/32" x 1-1/2"

FNM

Time-Current Characteristic Curves—Average Melt

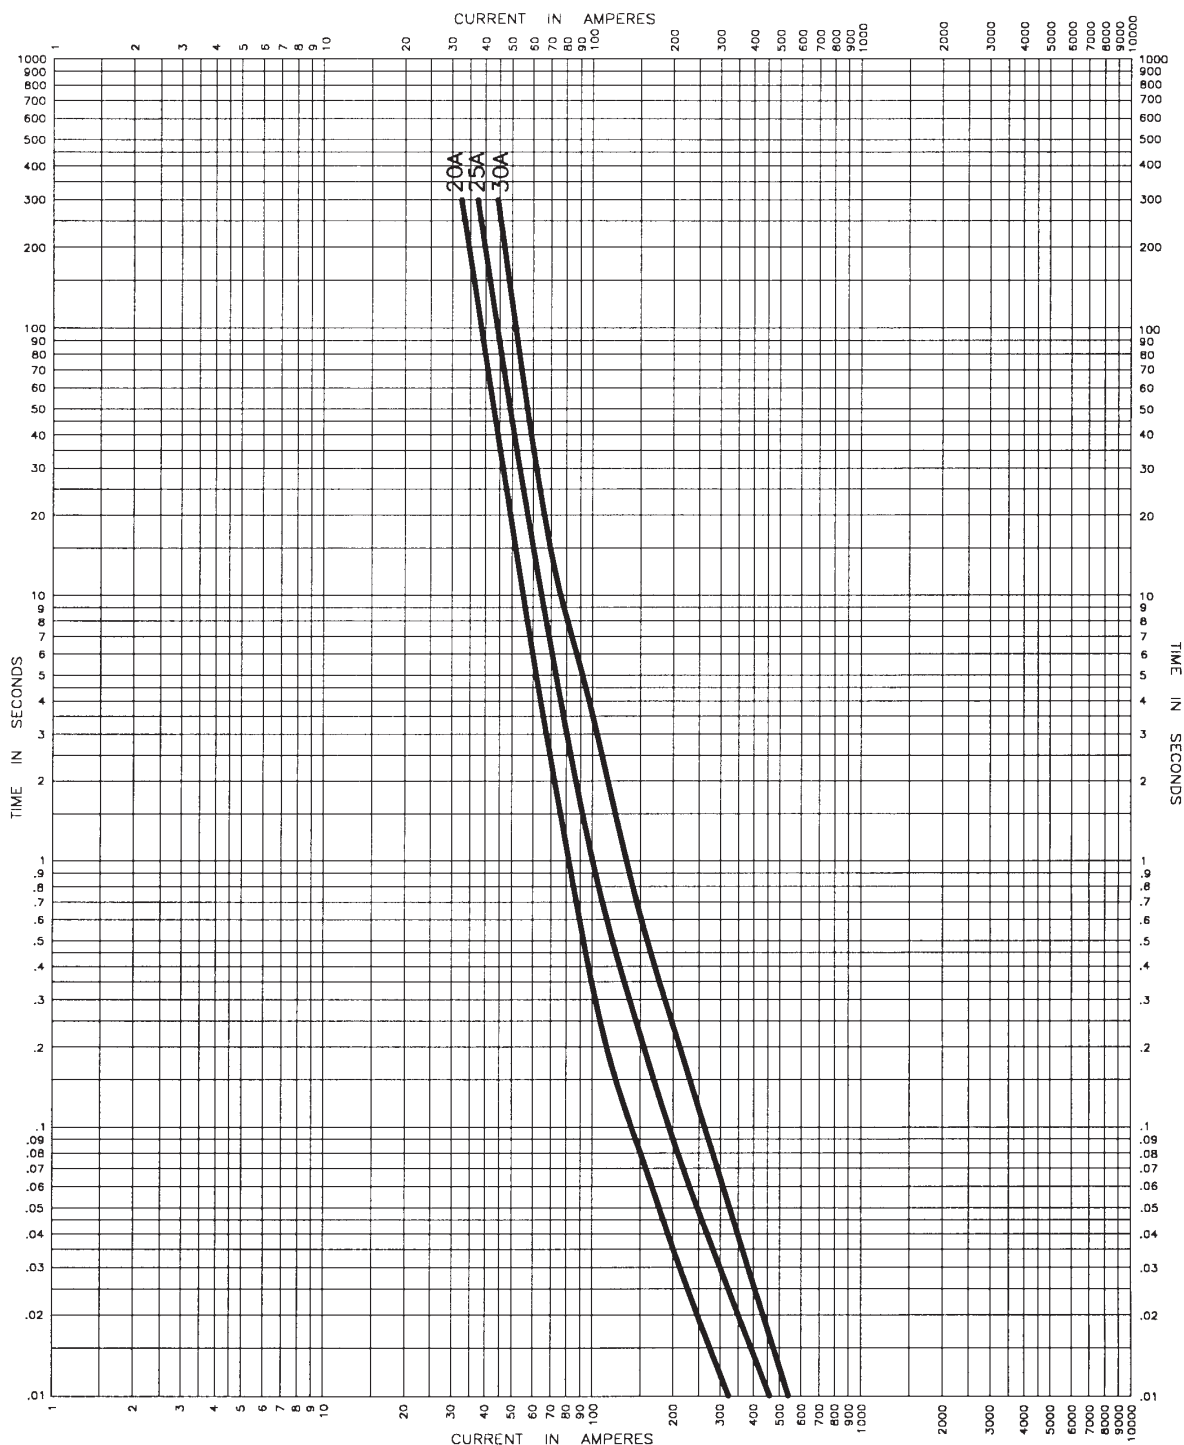

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.