

Disc Ceramic Capacitors



Professional Ceramic Capacitors - Class I, II and III

MIL-STD-202F

The professional ceramic disc capacitors were specially developed for applications in severe environmental conditions, high humidity, temperature, gas, vapor and solvents.

The capacitors are flame retardant epoxy coated, meeting UL 94-V0 flammability specifications. The capacitors are 100% screened on following electrical parameters:

Capacitance, loss factor, test voltage. After the 100% test, the capacitors are audited on its electrical and mechanical parameters with following AQL:

Electrical parameters: 0.065% level II

Mechanical parameters: 0.65% level II

The capacitors withstand the following reliability essays:

Terminal strength: method 211 – condition A

Resistance to solvents: method 215

Resistance to soldering heat: method 210 – condition B


Solderability: method 208

Thermal shock: method 107 – condition A

Humidity (steady state): method 103 – condition D

Life (at elevated ambient temperature): method 108 – condition D

Operating temperature and storage: -55... +125° C

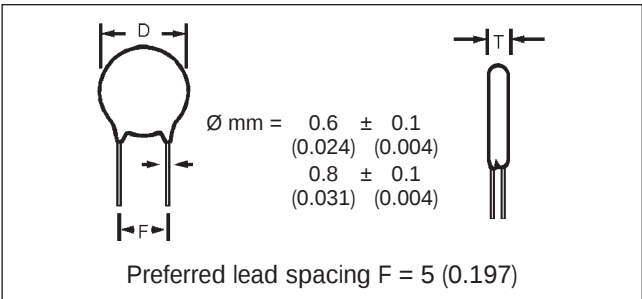

millimeters (inches)

Lead Spacing	Digit 8	
F		
2.5 (0.100)	D	—
5 (0.200)	A	O
6 (0.250)	E	X
7.5 (0.300)	B	R
10 (0.400)	C	W

DIMENSIONS

millimeters (inches)

Digit 9 (ø)	D ± 2 (0.079)	T max.	Available Lead Spacing
A $\frac{NP0}{1pF... 2.7 pF}$	4.0 (0.157)	3.0 (0.118)	A,B,D,E,O,R
A $\frac{N1500}{5.6pF... 8.2 pF}$	4.0 (0.157)	3.0 (0.118)	A,B,D,E,O,R
A Others	4.0 (0.157)	3.0 (0.118)	A,B,D,E,O,R
B	5.0 (0.197)	3.0 (0.118)	A,B,D,E,O,R,X
C	6.0 (0.236)	3.0 (0.118)	A,B,C,D,E,O,R,X
D	7.0 (0.276)	3.0 (0.118)	A,B,C,D,E,O,R,X
E	8.0 (0.315)	3.0 (0.118)	A,B,C,D,E,O,R,X
F	9.0 (0.354)	3.0 (0.118)	A,B,C,E,O,R,X
G	10.0 (0.394)	3.0 (0.118)	A,B,C,E,O,R,X
H	11.0 (0.433)	3.0 (0.118)	A,B,C,E,O,R,W
J	13.0 (0.512)	3.5 (0.138)	B,C,R,W
K	15.0 (0.591)	3.5 (0.138)	B,C,R,W
M	19.0 (0.748)	4.0 (0.157)	B,C

(E), (X), (W): upon request

Disc Ceramic Capacitors

General Specifications - Class III Professional

DIELECTRIC - CLASS III


A thin dielectric layer is grown on a disc of conductive ceramic. Very large capacitances can be obtained due to reduced thickness of this barrier layer and its inherently high dielectric constant. Due its small dimensions, they are a less expensive replacement of multilayer ceramic or polyester capacitors.

DIMENSIONS

millimeters (inches)

Digit 9 of P.N. (ø)	D ± 2 (0.079)	T max.	Available Lead Spacing
A	4.0 (0.157)	3.0 (0.118)	A,B,D,E,O,R
B	5.0 (0.197)	3.0 (0.118)	A,B,D,E,O,R,X
C	6.0 (0.236)	3.0 (0.118)	A,B,C,D,E,O,R,X
D	7.0 (0.276)	3.0 (0.118)	A,B,C,D,E,O,R,X
E	8.0 (0.315)	3.0 (0.118)	A,B,C,D,E,O,R,X
F	9.0 (0.354)	3.0 (0.118)	A,B,C,E,O,R,X
G	10.0 (0.394)	3.0 (0.118)	A,B,C,E,O,R,X
H	11.0 (0.433)	3.0 (0.118)	A,B,C,E,O,R,W
J	13.0 (0.512)	3.5 (0.138)	B,C,R,W
K	15.0 (0.591)	4.0 (0.157)	B,C,R,W

(E), (X), (W): upon request

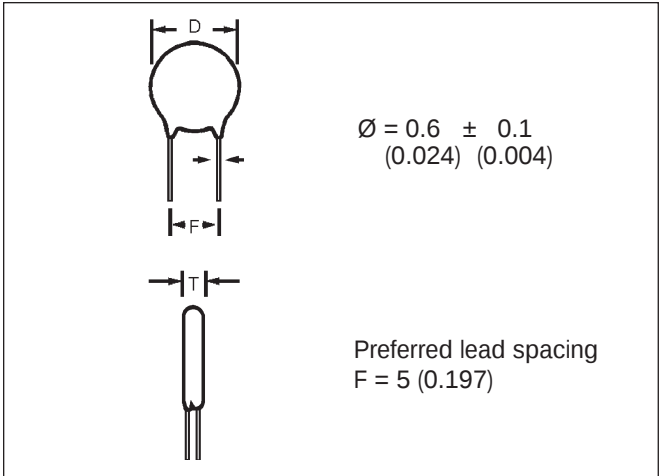

millimeters (inches)

Lead Spacing	Digit 8 of P.N.	
F		
2.5 (0.100)	D	—
5 (0.200)	A	O
6 (0.250)	E	X
7.5 (0.300)	B	R
10 (0.400)	C	W

PERFORMANCE CHARACTERISTICS CLASS III

Measured at	1.0 kHz / 0.1 Vrms / 25°C	
Dissipation Factor	$C_R \leq 22 \text{ nF} \rightarrow Y5V, Y5U \leq 7.5\%$ $C_R > 22 \text{ nF} \rightarrow Y5V, Y5P \leq 5.0\%$	
Capacitance Tolerance	$Y5P \rightarrow \pm 20\% / -20 +50\%$ $Y5U \rightarrow \pm 20\% / -20 +80\%$ $Y5V \rightarrow \pm 20\% / -20 +80\%$	
Climatic Category	55 / 085 / 56	
Insulation Resistance @ V_R	Y5P	$\geq 12 \text{ M}\Omega$
	Y5U	$4.7 \text{ nF} \dots 100 \text{ nF} \rightarrow \geq 10 \text{ M}\Omega$ $200 \text{ nF} \rightarrow \geq 1 \text{ M}\Omega$
	Y5V	$\geq 100 \text{ M}\Omega$
Dielectric Strength NOTE: Charging current limited to 50 mA	Between leads	$V_t = 1.25 V_R$
	Body insulation	$V_R = 25V \quad V_t = 100V \text{ (DC)}$ $V_R = 50V \quad V_t = 150V \text{ (DC)}$
Operating Temperature Range (°C)	-55... +125 Epoxy Coated	

Note: Damp Heat Steady State: 90... 95% R.H. 40°C / 21 days. No voltage to be applied.

Disc Ceramic Capacitors

Dimension Table

Barrier Layer Capacitors - Class III Professional



EPOXY COATED – CAPACITANCE VS. DISC DIAMETER

millimeters (inches)

Class III	$\Delta C/C$ (max.) $\pm 12\%$ Range -30... +85°C		$\Delta C/C$ (max.) +30 -65% Range -30... +85°C		$\Delta C/C$ (max.) +22 -85% Range -30... +85°C	
Temp. Coefficient	Y5P		Y5U		Y5V	
Digits 1,2,3 of P.N.	6WF	6WH	6YF	6YH	6ZH	
Rated Voltage (V_R)	25	50	25	50	50	
C_R (pF)						
4,700	4.0 (0.157)	4.0 (0.157)	4.0 (0.157)	4.0 (0.157)	4.0 (0.157)	
10,000	6.0 (0.236)	6.0 (0.236)				
22,000	7.0 (0.276)	8.0 (0.315)	5.0 (0.197)	6.0 (0.236)		
33,000	8.0 (0.315)	9.0 (0.354)	6.0 (0.236)	7.0 (0.276)		
47,000	10.0 (0.394)	11.0 (0.433)	7.0 (0.276)	8.0 (0.315)	5.0 (0.197)	
50,000		—				
68,000	11.0 (0.433)	13.0 (0.512)				
100,000	13.0 (0.512)	15.0 (0.591)			7.0 (0.276)	
200,000	—	—	13.0 (0.512)	—		

Y5U, Y5V - Preferences


Diameter (ϕ) = 9th Part Number Digit

Disc Ceramic Capacitors



Ordering Code

HOW TO ORDER

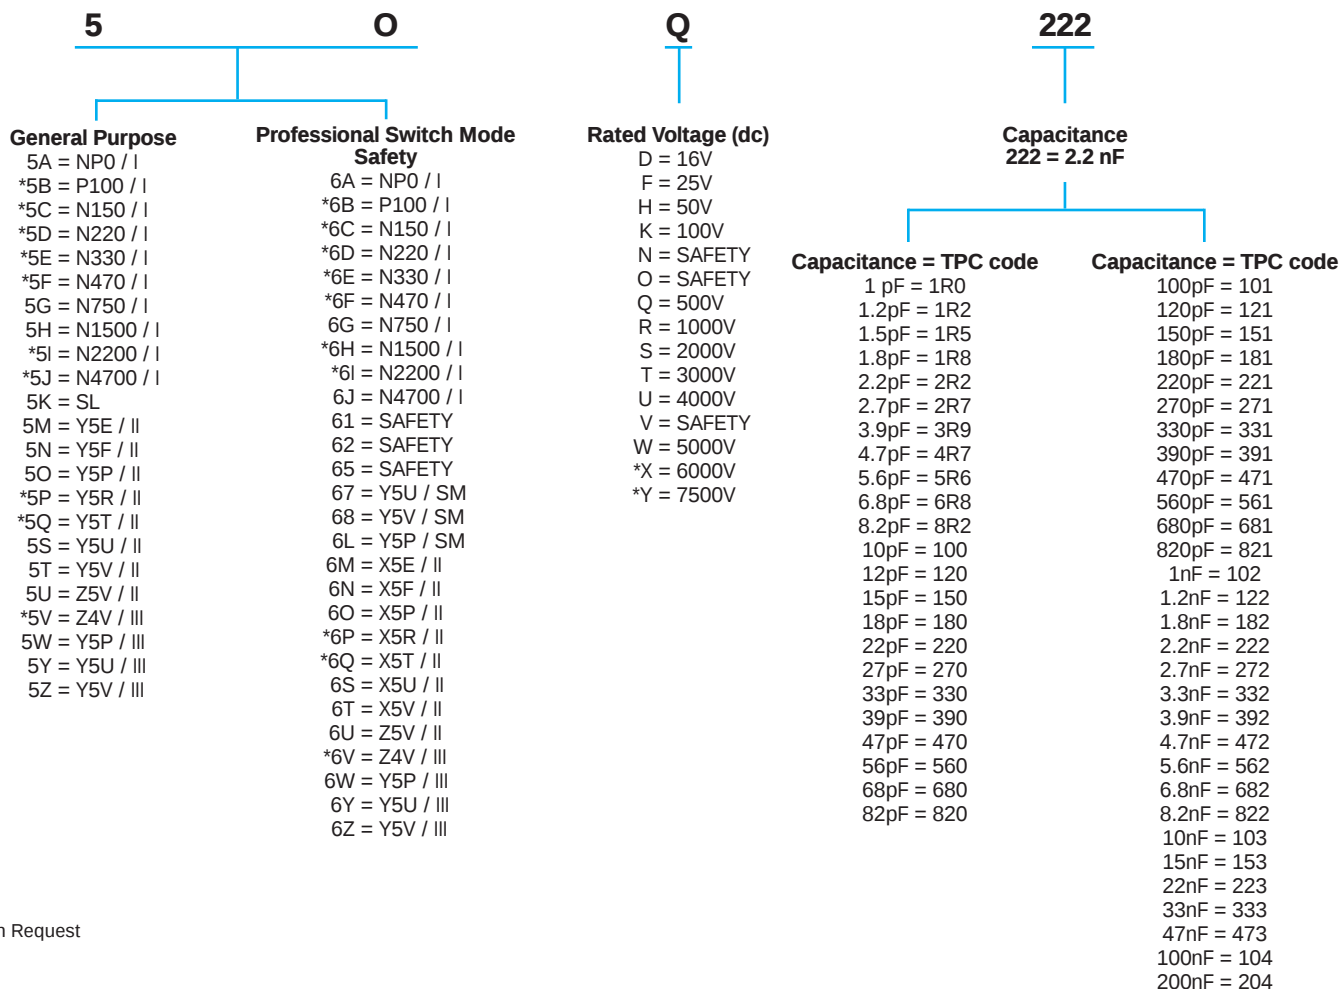

*Upon Request

Disc Ceramic Capacitors

Ordering Code



M

Tolerance

C = ± 0.25 pF
D = ± 0.50 pF
J = $\pm 5\%$
K = $\pm 10\%$
M = $\pm 20\%$
S = -20+50%
Z = -20+80%
P = 0+100%

A

Capacitor Diameter ± 2 (0.079)

A = 4 (0.157)
B = 5 (0.197)
C = 6 (0.236)
D = 7 (0.276)
E = 8 (0.315)
F = 9 (0.354)
G = 10 (0.394)
H = 11 (0.433)
J = 13 (0.512)
K = 15 (0.591)
M* = 19 (0.748)


*Wire 0.8 (0.031) recommended

A

A

Packaging

Cardboard Strips



Bulk

E = 5 (0.197) ± 1 (0.039) free wire length
C = 10 (0.394) ± 1 (0.039) free wire length
D = 25 (0.984) ± 1 (0.039) free wire length

Taping



Reel

Avisert			Panaset		
H	L	L	J	L	L




Ammo Pack

Avisert			Panaset		
I	M	M	K	M	M

Lead Forming				
mm	inches			
2.5 ± 0.5	.1 $\pm .025$	D	—	—
5 $\begin{smallmatrix} +0.6 \\ -0.2 \end{smallmatrix}$	.2 $\pm .025$	A	O	N
6 $\begin{smallmatrix} +0.6 \\ -0.2 \end{smallmatrix}$	.25 $\pm .025$	E	X	—
7.5 $\begin{smallmatrix} +1 \\ -0.5 \end{smallmatrix}$	.3 $\pm .05$	B	R	Q
10 $\begin{smallmatrix} +0.5 \\ -1.0 \end{smallmatrix}$	.4 $\pm .05$	C	W	—
12.5 $\begin{smallmatrix} +1 \\ -0.5 \end{smallmatrix}$	.5 $\pm .05$	P	—	—


Finishing

Diam ≤ 9 (0.354) and
F = 5.00 (0.197)



Coating does not
surpass the bend

For every other:




Low Voltage

A = Phenolic (General Purpose) Q = Waxed phenolic

S = Epoxy (Professional) cap. diameter
 ≤ 8 (0.315)

D = Epoxy (Professional) cap. diameter
 > 8 (0.315)

High Voltage



F = Measured
from the
center of
leads

C = Epoxy wire diameter $\begin{smallmatrix} 0.6 \\ (0.024) \end{smallmatrix} \pm \begin{smallmatrix} 0.1 \\ (0.004) \end{smallmatrix}$

I = Epoxy wire diameter $\begin{smallmatrix} 0.8 \\ (0.031) \end{smallmatrix} \pm \begin{smallmatrix} 0.1 \\ (0.004) \end{smallmatrix}$

L = Phenolic wire diameter $\begin{smallmatrix} 0.6 \\ (0.024) \end{smallmatrix} \pm \begin{smallmatrix} 0.1 \\ (0.004) \end{smallmatrix}$

Please note that not all code combinations
are either possible or available.

Disc Ceramic Capacitors



Marking

DIG. 2		Logo: Only in diam. ≥ 6mm	Capacitance		EIA																														
O																																			
TC / Class																																			
General Purpose	Professional		1pF = 109		100pF = 101																														
A = NP0 / I	A = NP0 / I		1.2pF = 129		120pF = 121																														
*B = P100 / I	B = P100 / I		1.5pF = 159		150pF = 151																														
*C = N150 / I	C = N150 / I		1.8pF = 189		180pF = 181																														
*D = N220 / I	D = N220 / I		2.2pF = 229		220pF = 221																														
*E = N330 / I	E = N330 / I		2.7pF = 279		270pF = 271																														
*F = N470 / I	F = N470 / I		3.9pF = 399		390pF = 391																														
G = N750 / I	G = N750 / I		4.7pF = 479		470pF = 471																														
H = N1500 / I	H = N1500 / I		5.6pF = 569		560pF = 561																														
*I = N2200 / I	I = N2200 / I		6.8pF = 689		680pF = 681																														
*J = N4700 / I	J = N4700 / I		8.2pF = 829		820pF = 821																														
K = SL	7 = Y5U / SM		10pF = 100		1nF = 102																														
M = Y5E / II	8 = Y5V / SM		12pF = 120		1.2nF = 122																														
N = Y5F / II	L = Y5P / SM		15pF = 150		1.8nF = 182																														
O = Y5P / II	M = X5E / II		18pF = 180		2.2nF = 222																														
P = Y5R / II	N = X5F / II		22pF = 220		2.7nF = 272																														
Q = Y5T / II	O = X5P / II		27pF = 270		3.9nF = 392																														
S = Y5U / II	P = X5R / II		39pF = 390		4.7nF = 472																														
T = Y5V / II	Q = X5T / II		47pF = 470		5.6nF = 562																														
U = Z5V / II	S = X5U / II		56pF = 560		6.8nF = 682																														
V = Z4V / III	T = X5V / II	68pF = 680		8.2nF = 822																															
*W = Y5P / II	U = Z5V / II	82pF = 820		10nF = 103																															
*X = Y5R / II	V = Z4V / III	<table><tr><th>DIG. 3</th><th>DIG. 7</th></tr><tr><th>Q</th><th>M</th></tr><tr><th>Rated Voltage</th><th>Tolerance</th></tr><tr><td>D = 16V</td><td>C = ±0.25pF</td></tr><tr><td>F = 25V</td><td>D = ±0.5pF</td></tr><tr><td>H = 50V</td><td>J = ±5%</td></tr><tr><td>K = 100V</td><td>K = ±10%</td></tr><tr><td>Q = 500V</td><td>M = ±20%</td></tr><tr><td>R = 1000V</td><td>S = -20 +50%</td></tr><tr><td>S = 2000V</td><td>Z = -20 +80%</td></tr><tr><td>T = 3000V</td><td>P = 0 +100%</td></tr><tr><td>U = 4000V</td><td></td></tr><tr><td>W = 5000V</td><td></td></tr><tr><td>X = 6000V</td><td></td></tr><tr><td>Y = 7500V</td><td></td></tr></table>	DIG. 3	DIG. 7	Q	M	Rated Voltage	Tolerance	D = 16V	C = ±0.25pF	F = 25V	D = ±0.5pF	H = 50V	J = ±5%	K = 100V	K = ±10%	Q = 500V	M = ±20%	R = 1000V	S = -20 +50%	S = 2000V	Z = -20 +80%	T = 3000V	P = 0 +100%	U = 4000V		W = 5000V		X = 6000V		Y = 7500V		15nF = 153		22nF = 223
DIG. 3	DIG. 7																																		
Q	M																																		
Rated Voltage	Tolerance																																		
D = 16V	C = ±0.25pF																																		
F = 25V	D = ±0.5pF																																		
H = 50V	J = ±5%																																		
K = 100V	K = ±10%																																		
Q = 500V	M = ±20%																																		
R = 1000V	S = -20 +50%																																		
S = 2000V	Z = -20 +80%																																		
T = 3000V	P = 0 +100%																																		
U = 4000V																																			
W = 5000V																																			
X = 6000V																																			
Y = 7500V																																			
Y = Y5U / II	W = Y5P / III	33nF = 333		47nF = 473																															
Z = Y5V / II	X = Y5R / III	100nF = 104		200nF = 204																															
	Y = Y5U / III																																		
	Z = Y5V / III																																		


*Upon Request

TC – Temperature coefficient.

DIG – for better understanding, check pages 3 and 4.

Safety Front

Capacitance
As above



Type
61V
620
65N

Tolerance
As above

Back: (Approval marks)


Disc Ceramic Capacitors



Packaging

IDENTIFICATION AND TRACEABILITY

On all TPC ceramic capacitors packages, you will find a bar code label with the following information:

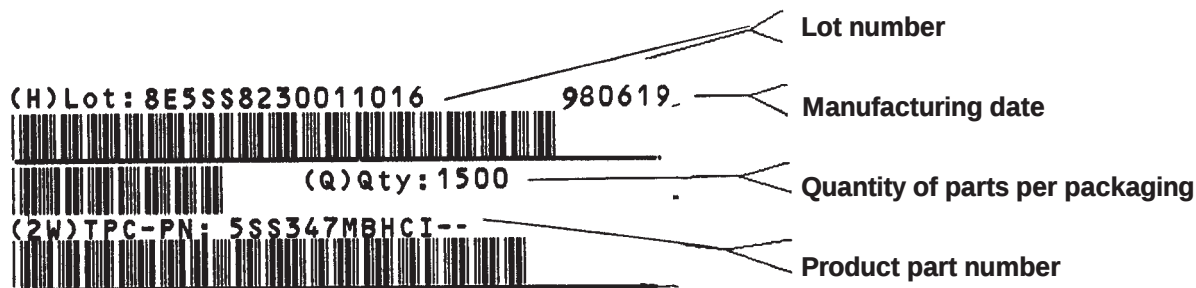

TAPED PARTS QUANTITY TABLE

millimeters (inches)

Rated Voltage	Diameter	Quantities	
(Vr)	D	Ammopack	Reel
Vr ≤ 500V	D ≤ 7 (0.276)	2000	2500
	7 < D ≤ 11 (0.433)	2000	2000
500V < Vr ≤ 2KV	D ≤ 11 (0.433)	1500	2000
2KV < Vr ≤ 5KV	D ≤ 11 (0.433)	1000	1500

CARDBOARD STRIPS QUANTITY TABLE

millimeters (inches)

Rated Voltage	Diameter	Lead Space	
(Vr)	D	≤ 5 (0.197)	> 5 (0.197)
Vr ≤ 500V	D ≤ 8 (0.315)	2500	1500
	8 (0.315) ≤ D ≤ 11 (0.433)	1500	-
	8 (0.315) ≤ D ≤ 13 (0.512)	-	1000
	11 (0.433) ≤ D ≤ 15 (0.591)	1000	-
	13 (0.512) ≤ D ≤ 19 (0.748)	-	500
	D ≤ 19 (0.748)	500	-
500V < Vr ≤ 2KV	D ≤ 9 (0.354)	1500	1000
	9 (0.354) ≤ D ≤ 11 (0.433)	-	1000
	9 (0.354) ≤ D ≤ 13 (0.512)	1000	-
	11 (0.433) ≤ D ≤ 19 (0.748)	-	500
	13 (0.512) ≤ D ≤ 19 (0.748)	500	-
2KV < Vr ≤ 5KV	D ≤ 9 (0.354)	1500	-
Safety 65N 62O	D ≤ 11 (0.433)	-	1000
	D ≤ 13 (0.512)	500	500
Safety	D ≤ 6 (0.236)	1500	1500
61V	7 (0.275) ≤ D ≤ 9 (0.354)	1000	1000
	9 (0.354) ≤ D	500	500

Quantities for other package alternative, upon request.


Disc Ceramic Capacitors



Tape and Reel Specifications

There are two types of taped disc ceramic capacitors:
Straight or crimped leads.

Both types can be shipped on reels or ammpack.
The standard packaging quantities are shown below:

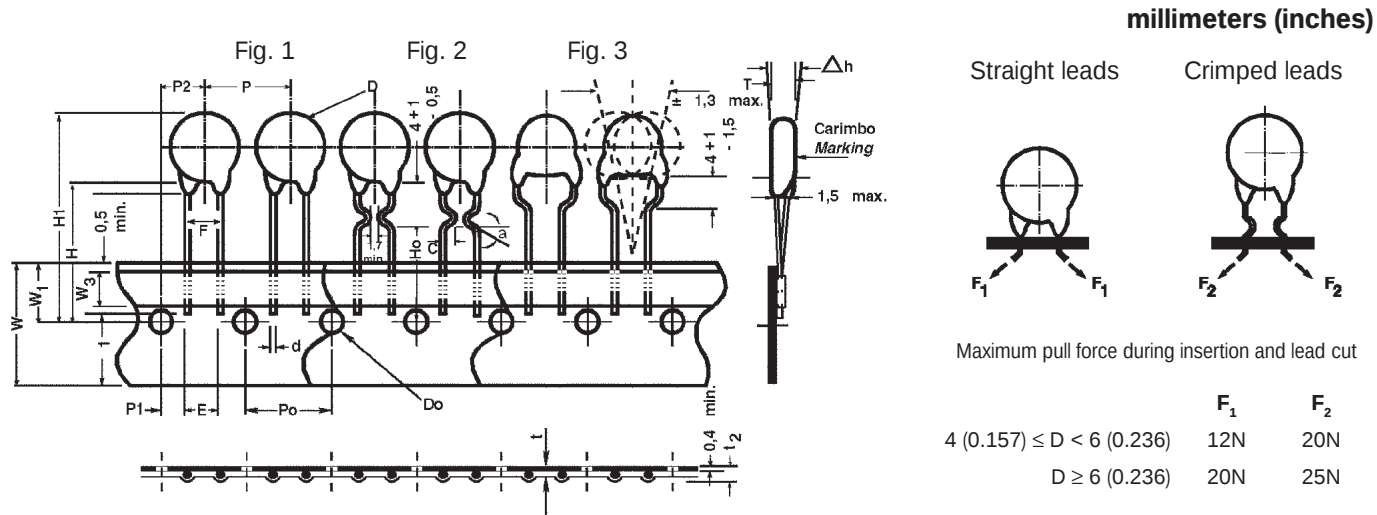

Digit 11	Available Tappings		Digit 9
L	➔	Sizes 4 (0.157) ≤ D ≤ 11 (0.433)	A... H
M			
J H	➔	Sizes 6 (0.236) ≤ D ≤ 11 (0.433)	C... H
K I			

TPC Code Digit 11

Packaging	Avisert	Panasert
Reel 	 H L L FIGURE 1 FIGURE 2 FIGURE 3	 J L L FIGURE 1 FIGURE 2 FIGURE 3
Ammpack 	 I M M FIGURE 1 FIGURE 2 FIGURE 3	 K M M FIGURE 1 FIGURE 2 FIGURE 3

Figure 2: Inside Crimp 100V... 1000V

Figure 3: Outside Crimp 1000V

Disc Ceramic Capacitors




Tape and Reel Specifications

millimeters (inches)

Description of Symbols		Straight Leads		Crimped
		Figure 1		Figure 2 & 3
		A (Avisert)	P (Panaset)	Avisert & Panaset
Crimp angle	∞	—	—	20°...45°
Crimp length	C	—	—	1.7 min.
Lead diameter	d	0.60 ± 0.1		
Disc diameter	D	11 max.		
Lead hole diameter	Do	4.0 ± 0.2		
Disc thickness	T	See Catalog		
Lead spacing	F	5.0 $^{+0.6}_{-0.2}$		
Component alignment, front-rear	Δh	0 ± 1		
Height of component from tape center	H	19.5 ± 0.5	16.5 ± 0.5 - 0	—
Height from tape center to crimp	Ho	—	—	16 + 0.5 - 0
Component height	H1	32.25 max.	>23.5 <32.25	32.25 max.
Distance from component leads to tape bottom	ℓ_1	12 max.		
Tape width	W	18 $^{+1}_{-0.5}$		
Bonding tape width	W ₃	5.5 min.		
Feed hole position	W ₁	9.0 ± 0.5		
Pitch between discs	P	12.7 ± 1		
Feed hole pitch	Po	12.7 ± 0.3		
Hole center to lead	P1	3.85 ± 0.7		
Feed hole center to component center	P2	6.35 ± 1		
Tape + bonding tape thickness	t	0.7 ± 0.2		
Total tape thickness. including lead	t ₂	1.5 max.		

PACKAGING

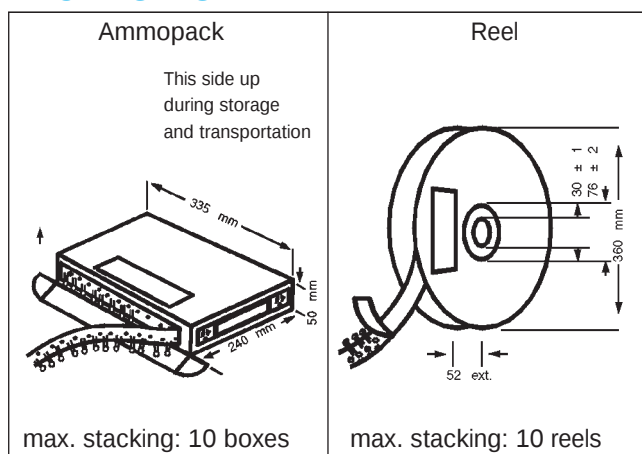

SHIPPING CONTAINER

