



# SAW Components

Data Sheet B3850

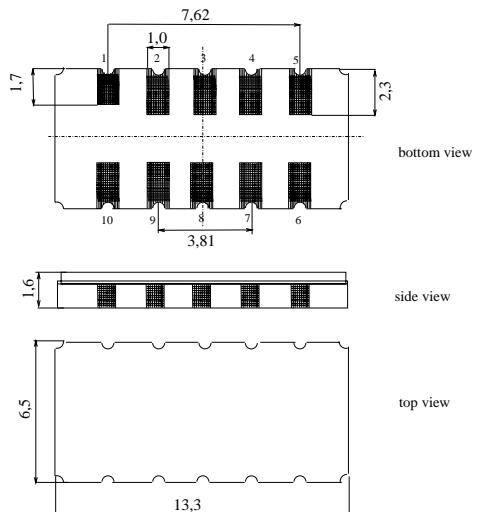
Data Sheet

**SAW Components**
**B3850**
**Low-Loss Filter**
**125,00 MHz**
**Data Sheet**
**Features**

- Low-loss IF filter for GSM EDGE base station
- Usable bandwidth 400 kHz
- Very low group delay ripple
- Temperature stable
- Ceramic SMD package

**Terminals**

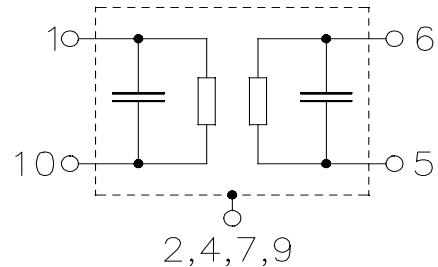
- Gold plated

**Ceramic package DCC12A**


Dimensions in mm, approx. weight 0,4 g

**Pin configuration**

10	Input
1	Input ground
5	Output
6	Output ground
3, 8	Ground
2, 4, 7, 9	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B3850	B39121-B3850-H510	C61157-A7-A94	F61074-V8131-Z000

**Electrostatic Sensitive Device (ESD)**
**Maximum ratings**

Operable temperature range	$T$	-40 / +85	°C	
Storage temperature range	$T_{stg}$	-40 / +85	°C	
DC voltage	$V_{DC}$	1,2	V	
Source power	$P_s$	10	dBm	

**SAW Components****B3850****Low-Loss Filter****125,00 MHz****Data Sheet****Characteristics**

Operating temperature range:

 $T = -10 \dots 85^\circ C$ 

Terminating source impedance:

 $Z_S = 50 \Omega$  and matching network

Terminating load impedance:

 $Z_L = 50 \Omega$  and matching network

			<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	125,0	—	—	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{min}$	—	6,2	7,0	—	dB
<b>Pass bandwidth</b>						
	$\alpha_{rel} \leq 1,0 \text{ dB}$	$B_{1dB}$	400	560	—	kHz
	$\alpha_{rel} \leq 3,0 \text{ dB}$	$B_{3dB}$	—	840	—	kHz
<b>Amplitude ripple (peak to adjacent valley)</b>	$f_N \pm 200 \text{ kHz}$	—	0,1	—	—	dB
<b>Amplitude variation (p-p)</b>	$f_N \pm 200 \text{ kHz}$	$\Delta\alpha$	—	0,6	1,0	dB
<b>Absolute group delay</b>	$\text{@ } f_N$	$\tau$	0,7	1,1	1,7	$\mu\text{s}$
<b>Group delay ripple (p-p)</b>	$f_N \pm 200 \text{ kHz}$	$\Delta\tau$	—	70	120	ns
<b>Relative attenuation (relative to <math>\alpha_{min}</math>)</b>		$\alpha_{rel}$				
$f_N \pm 0,4 \text{ MHz}$	...	$f_N \pm 0,6 \text{ MHz}$	0	2	—	dB
$f_N \pm 0,6 \text{ MHz}$	...	$f_N \pm 1,2 \text{ MHz}$	8	10	—	dB
$f_N \pm 1,2 \text{ MHz}$	...	$f_N \pm 1,8 \text{ MHz}$	20	30	—	dB
$f_N \pm 1,8 \text{ MHz}$	...	$f_N \pm 3,4 \text{ MHz}$	25	40	—	dB
$f_N \pm 3,4 \text{ MHz}$	...	$f_N \pm 6,5 \text{ MHz}$	34	50	—	dB
$f_N \pm 6,5 \text{ MHz}$	...	$f_N \pm 9,5 \text{ MHz}$	40	50	—	dB
$f_N \pm 9,5 \text{ MHz}$	...	$f_N \pm 17,0 \text{ MHz}$	43	60	—	dB
10,0 MHz	...	$f_N - 17,0 \text{ MHz}$	55	60	—	dB
$f_N + 17,0 \text{ MHz}$	...	450,0 MHz <sup>1)</sup>	55	60	—	dB
<b>VSWR (Input and output in pass band)</b>		—	2,0	2,3	—	

**Data Sheet**

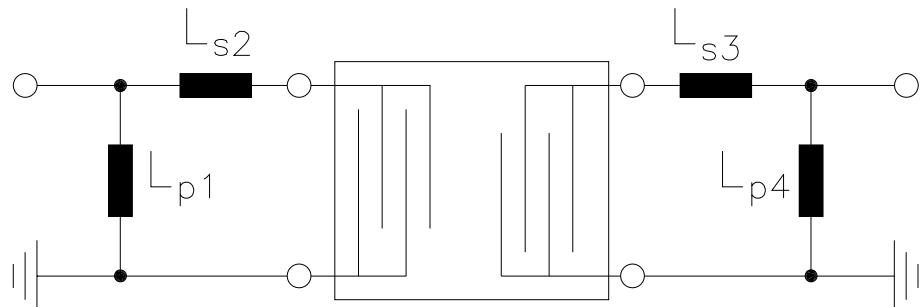
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Temperature coefficient of frequency</b> <sup>2)</sup>	$TC_f$	—	- 0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	50	—	°C

<sup>1)</sup> Narrowband responses (typ. 40 dB) at 202 MHz, 228 MHz, 250 MHz, and at 375 MHz

<sup>2)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$

**Matching network to 50 Ω**

(Element values depend upon PCB layout)

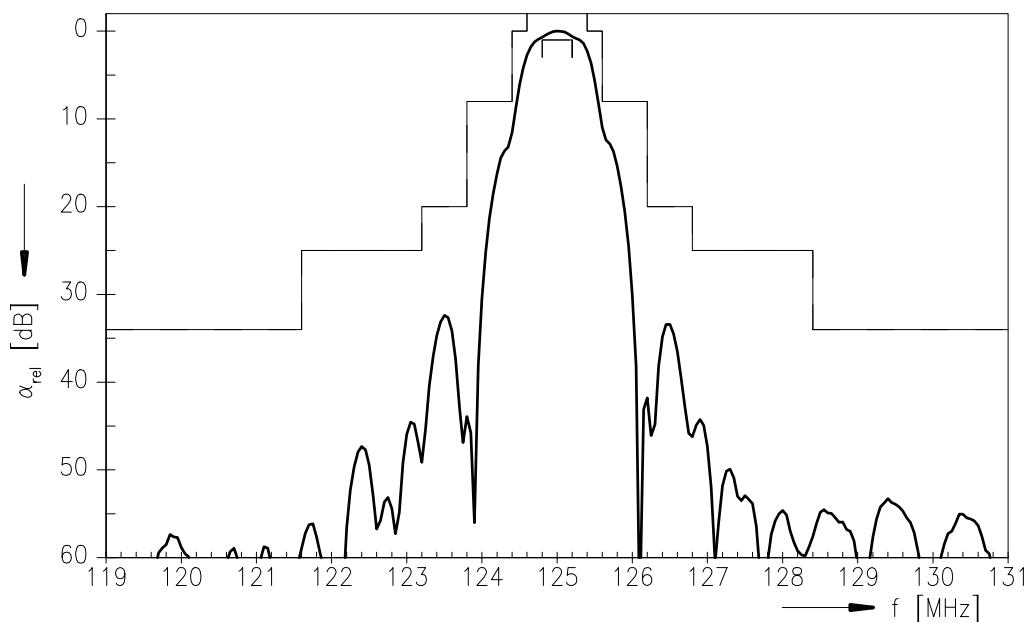
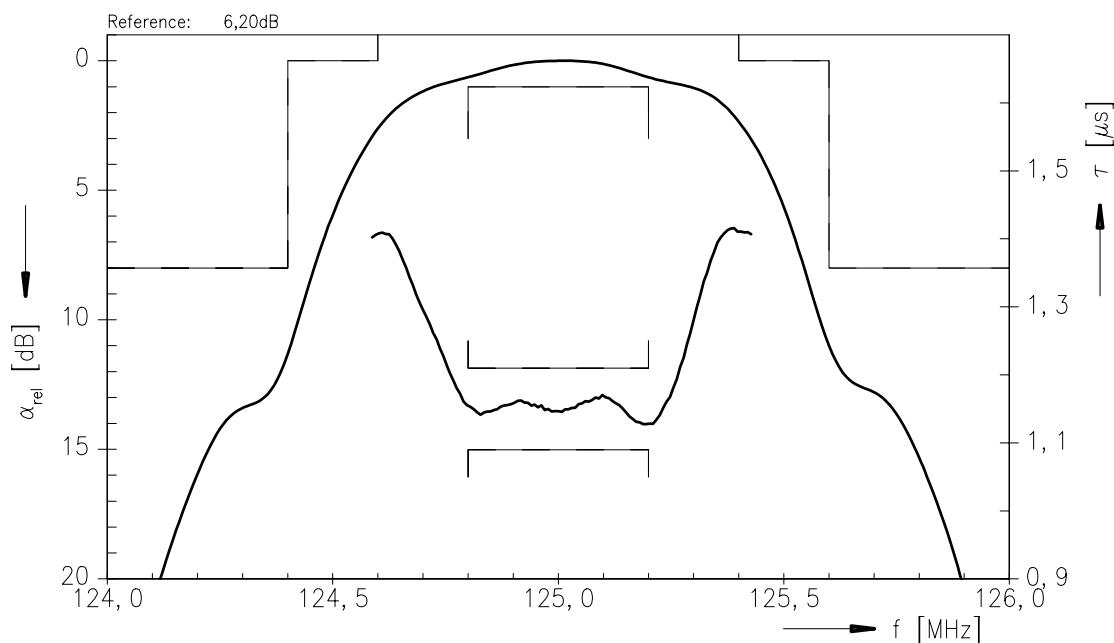


$$L_{p1} = 33 \text{ nH}$$

$$L_{s2} = 68 \text{ nH}$$

$$L_{s3} = 56 \text{ nH}$$

$$L_{p4} = 27 \text{ nH}$$

**Data Sheet**
**Normalized frequency response**

**Normalized frequency response (pass band)**




**SAW Components**

**B3850**

**Low-Loss Filter**

**125,00 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC IS**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.