

Manual Switches  
Mounting Dimensions (For Reference Only)

AML11/12 and 21/22 SWITCHES  
AML41C/D and AML42C INDICATORS

PUSHBUTTONS

LED Display

Non-illuminated or Incandescent Lamp Display

Non-illuminated or Incandescent Lamp Display

For terminal locations, see page 61.

AML27 SWITCHES

KEYLOCK

For terminal locations, see page 62.

AML14/16 and AML24/26 SWITCHES

ROCKERS

LED Display

Non-Illuminated or Incandescent Lamp Display

For terminal locations, see page 61, 62.

AML13/15 and 23/25 SWITCHES

PADDLES

LED Location Same as Rocker

For terminal locations, see page 61, 62.

AML41 INDICATOR  
LENS STYLE

AML42 INDICATOR  
MINIATURE

NOTE

1 Dimensions are mm or mm/IN

TERMINAL TYPES

Solder or Quick Connect



Printed Circuit

Solder Hole will accept two #22 AWG Stranded Conductor (per NEMA publication DC-2 1976)

# Manual Switches

## Mounting Dimensions (For Reference Only)

AML Series
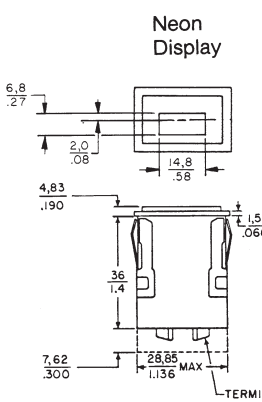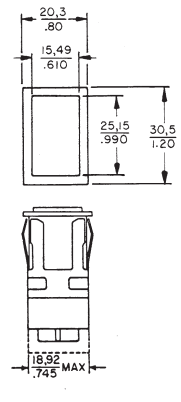
|                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>AML31/32 SWITCHES</div> <div>PUSHBUTTON</div> <div><div>Neon Display</div></div> <div><div>Non-illuminated or Incandescent Lamp Display</div></div> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|






# Manual Switches

## Mounting Dimensions (For Reference Only)

AML Series

### ANNUNCIATORS




#### AML45 SERIES

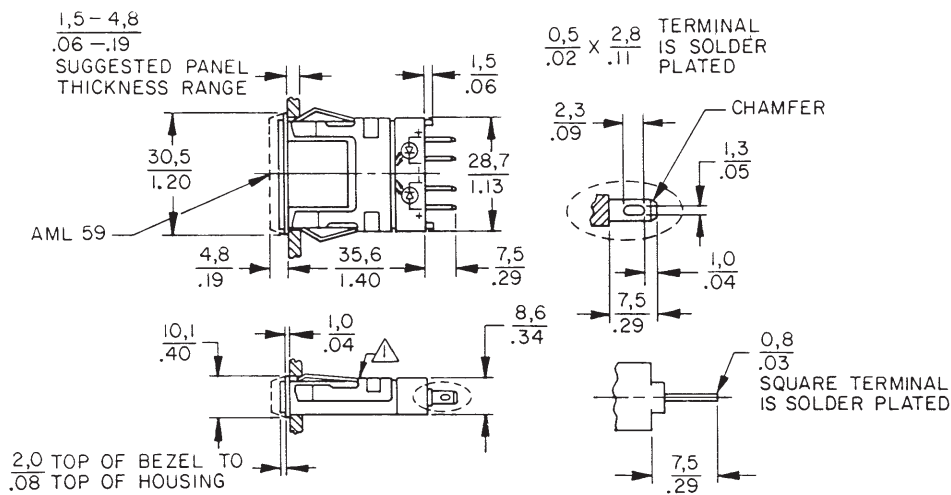

PANEL CUTOUT

PANEL CUTOUT FOR MOUNTING TWO ANNUNCIATORS IN ONE CUTOUT (USING ONE 30PAI-AML)

PANEL CUTOUT FOR AML 45 ABUTTING AML SWITCH (USING ONE 30PAI-AML)

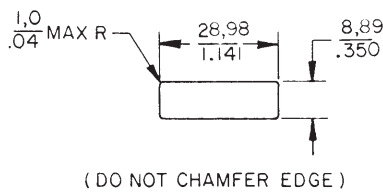

 Manufacturer's logo on this side of housing

For panel punch manufacturer, see page 60.

Manuals

Manual Switches

Mounting Dimensions (For Reference Only)

AML Series

MULTI-STATION FRONT-PANEL MOUNTING

Panel cutouts (See page 61 for panel punch manufacturer.)

| Square Switches & Indicators                                 | Rect. Switches & Indicators                                    | Annunciator                                                   |
|--------------------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------------|
| (.8) (No. of units) — .045*<br>(20,3) (No. of units) — 1,14* | (1.20) (No. of units) — .045*<br>(30,5) (No. of units) — 1,14* | (.40) (No. of units) — .045*<br>(10,1) (No. of units) — 1,14* |

For each barrier, add .053/1,35

\* Note: If barriers are used, do not subtract .045 in./1,14 mm from the panel cutout formula. (.045 in./1,14mm is the allowance for the width of the bezel.)

AML61 MULTI-STATION SUBPANEL MOUNTING

Panel cutouts for AML61


| Mounting Bracket Orientation | Width          | Length                |
|------------------------------|----------------|-----------------------|
| A*<br>in.<br>mm              | .810<br>20,57  | (.810)(No. of units)  |
| B<br>in.<br>mm               | .810<br>20,57  | (1.210)(No. of units) |
| C or D*<br>in.<br>mm         | 1.210<br>27,94 | (.810)(No. of units)  |

\* More than two cans with mounting brackets required for strips of more than 10 units.

AML61 MOUNTING CENTERS

| Mounting Bracket Orientation |           | Mounting Centers/Number of Cans        |                |                 |                 |                 |                 |                 |                  |                 |                 |                 |                  |
|------------------------------|-----------|----------------------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|-----------------|------------------|
|                              |           | 1                                      | 2              | 3               | 4               | 5               | 6               | 7               | 8                | 9               | 10              | 11              | 12               |
| "A" or "C"                   | in.<br>mm | 1.285<br>32,64                         | 2.095<br>53,21 | 2.905<br>73,79  | 3.715<br>94,36  | 4.525<br>114,94 | 5.335<br>135,51 | 6.145<br>156,08 | 6.955<br>176,66  | 7.765<br>197,23 | 8.575<br>217,81 | 9.385<br>238,38 | 10.195<br>258,95 |
| "B"                          | in.<br>mm | 1.685<br>42,80                         | 2.895<br>73,53 | 4.105<br>104,27 | 5.315<br>135,00 | 6.525<br>165,74 | 7.735<br>196,48 | 8.945<br>227,20 | 10.155<br>257,94 |                 |                 |                 |                  |
| "D" or "E"                   | in.<br>mm | on C <sub>L</sub><br>on C <sub>L</sub> | .807<br>20,50  | 1.614<br>41,00  | 2.421<br>61,49  | 3.228<br>81,99  | 4.035<br>102,49 | 4.842<br>122,99 | 5.649<br>143,48  | 6.456<br>163,98 | 7.263<br>184,48 | 8.070<br>204,98 | 8.877<br>225,48  |

Tolerance = ±.015

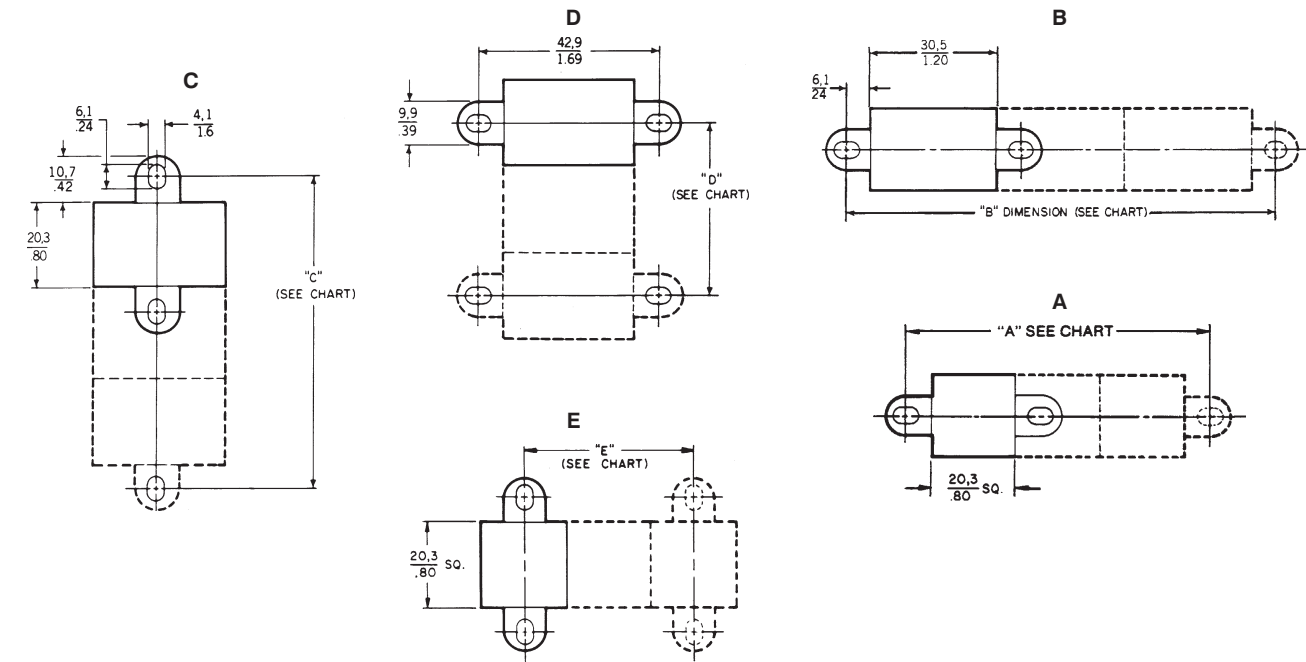


# Manual Switches

## Mounting Dimensions (For Reference Only)

AML Series

### AML75 PANEL SEAL ACCESSORY

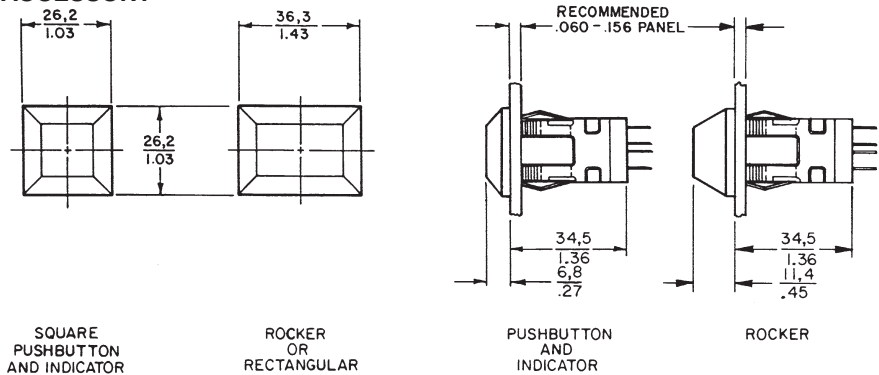


### Panel cutouts

Multiple panel sealed units should not be mounted together in a single elongated slot, since this would create an unsealed space between each unit.



Side-by-side mounting can be achieved, per the center-to-center dimensions shown in the drawing. (Dotted lines indicate the seal bases which are abutting at front of panel.)

AML75 seals are not designed for use with the AML61 mounting system.

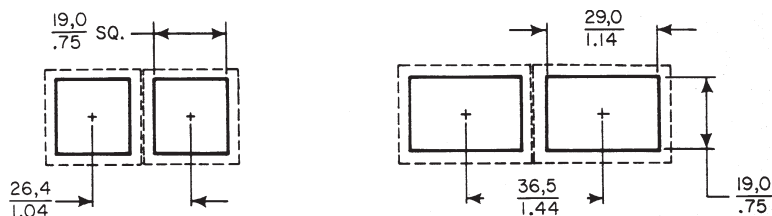


NOTE: Suggested cutout dimensions are based on an .125"/3,18 mm panel thickness. Individual preferences for inpanel fit may require measurement of assemblies before panels are cut.

### AML76 SWITCH GUARD ACCESSORY

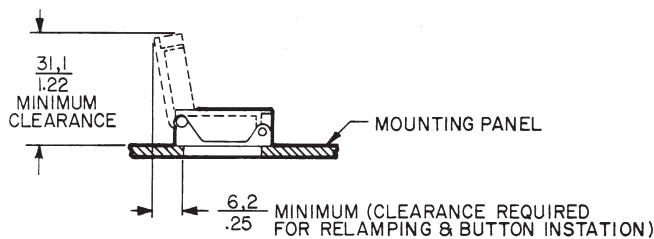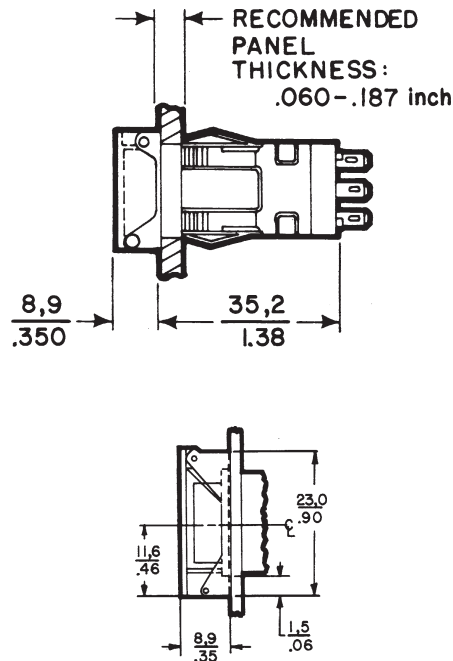

### PANEL CUTOUTS

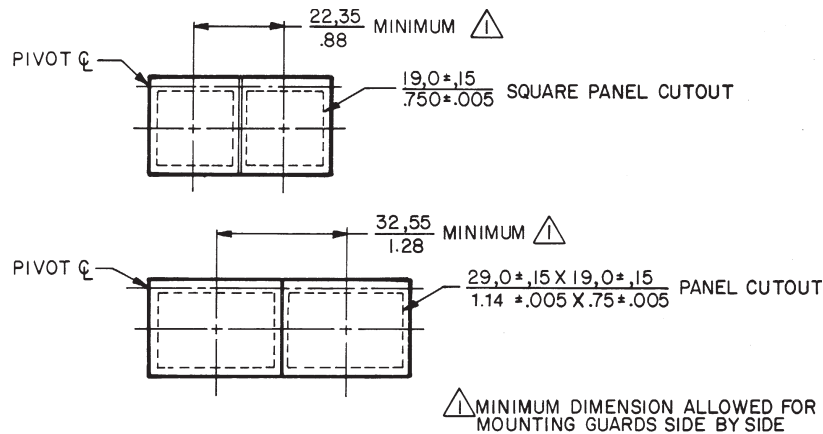

Manuals