


flat cable clamp - flat cables up to 50-conductor widths

WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Nine sizes accommodate all flat cables up to 50-conductor width.






PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS
FA28B0071	FC28B0071	.520 13,2	1.244 31,6	.750 19,1	.060 1,5	.510 13,0	49 @ 100 MHz
FA28B0121	FC28B0121	.520 13,2	1.790 45,5	.750 19,1	.060 1,5	1.010 25,7	97 @ 100 MHz
FA28B1240	FC28B1240	.520 13,2	1.790 45,5	1.125 28,6	.040 1,0	1.020 25,9	250 @ 100MHZ
FA28B1265		.520 13,2	1.790 45,5	1.125 28,6	.038 1,0	1.047 26,6	148 @ 100MHZ
FA28B1729	FC28B1729	.800 20,3	2.430 61,7	1.125 28,6	.060 1,5	1.355 34,4	200 @ 100 MHz
FA28B2265		.520 13,2	3.810 80,8	1.125 28,6	.038 1,0	2.047 52,0	154 @ 100 MHZ
FA28B2375	FC28B2375	.800 20,3	3.180 80,8	1.050 26,7	.060 1,5	1.720 43,7	195 @ 100 MHz
FA28B2480	FC28B2480	.800 20,3	3.180 80,8	1.125 28,6	.060 1,5	2.047 52,0	250 @ 100 MHz
FA28B3012	FC28B3012	.800 20,3	3.700 94,0	1.125 28,6	.060 1,5	2.540 64,5	286 @ 100 MHz

optional material formulations available upon request:

- low frequency 30 MHz peak
- high frequency 700 MHz peak
- microwave bluetooth™ 2.45 GHz peak

performance by part number:

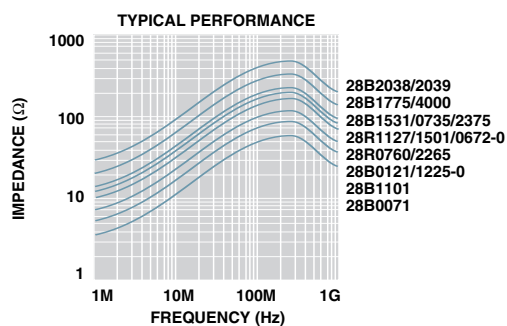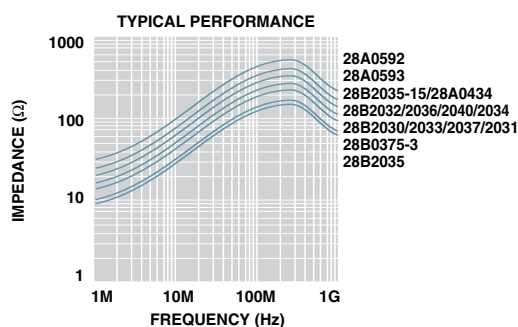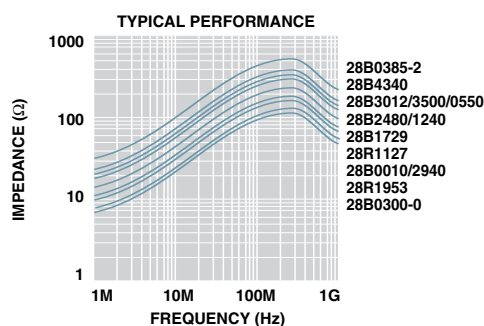

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LeaderTech:](#)

<u>FC28B3012</u>	<u>FA28B3012</u>	<u>FA28B2265</u>	<u>FC28B1240</u>	<u>FA28B1240</u>	<u>FA28B1265</u>	<u>FA28B2480</u>	<u>FC28B2480</u>	<u>FC28B0071</u>
<u>FA28B0071</u>	<u>FC28B0121</u>	<u>FA28B0121</u>	<u>FC28B1729</u>	<u>FA28B1729</u>	<u>FC28B2375</u>	<u>FA28B2375</u>		