

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.


Jameco Part Number 1539382

Features

- Ideally Suited for Automatic Insertion
- Complementary PNP Types Available (BC856-BC858)
- For Switching and AF Amplifier Applications
- **Lead Free/RoHS Compliant (Note 3)**
- **Qualified to AEC-Q101 Standards for High Reliability**

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Pin Connections: See Diagram
- Marking Information: See Page 4
- Ordering Information: See Page 4
- Approximate Weight: 0.008 grams

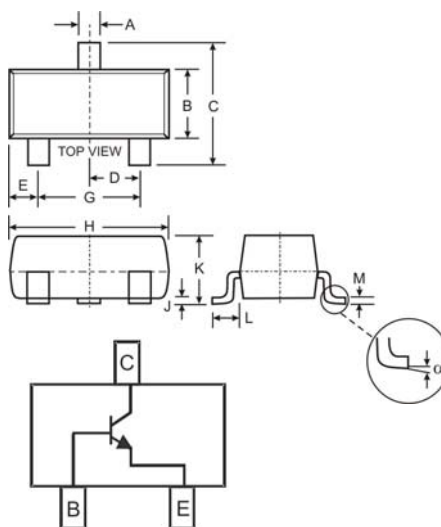

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.085	0.180
α	0°	8°
All Dimensions in mm		

Marking Code (Note 2)

Type	Marking	Type	Marking
BC846A	1A, K1Q	BC847C	1G, K1M
BC846B	1B, K1R	BC848A	1J, K1J, K1E, K1Q
BC847A	1E, K1E, K1Q	BC848B	1K, K1K, K1F, K1R
BC847B	1F, K1F, K1R	BC848C	1L, K1L, K1M

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	80	V
BC846		50	
BC847		30	
Collector-Emitter Voltage	V _{CEO}	65	V
BC846		45	
BC847		30	
Emitter-Base Voltage	V _{EBO}	6.0	V
BC846, BC847		5.0	
Collector Current	I _C	100	mA
Peak Collector Current	I _{CM}	200	mA
Peak Emitter Current	I _{EM}	200	mA
Power Dissipation (Note 1)	P _d	300	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	417	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150	°C

- Notes:
1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. Current gain subgroup "C" is not available for BC846.
 3. No purposefully added lead.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition	
Collector-Base Breakdown Voltage (Note 4)	BC846	V _{(BR)CBO}	80	—	—	V	I _C = 10μA, I _B = 0	
	BC847		50	—	—			
	BC848		30	—	—			
Collector-Emitter Breakdown Voltage (Note 4)	BC846	V _{(BR)CEO}	65	—	—	V	I _C = 10mA, I _B = 0	
	BC847		45	—	—			
	BC848		30	—	—			
Emitter-Base Breakdown Voltage (Note 3)	BC846, BC847 BC848	V _{(BR)EBO}	6 5	—	—	V	I _E = 1μA, I _C = 0	
H-Parameters								
Small Signal Current Gain	Current Gain Group A	h _{fe}	—	220	—	—	V _{CE} = 5.0V, I _C = 2.0mA, f = 1.0kHz	
		B	h _{fe}	—	330	—		—
		C	h _{fe}	—	600	—		—
Input Impedance	Current Gain Group A	h _{ie}	—	2.7	—	kΩ		
		B	h _{ie}	—	4.5	—		kΩ
		C	h _{ie}	—	8.7	—		kΩ
Output Admittance	Current Gain Group A	h _{oe}	—	18	—	μS		
		B	h _{oe}	—	30	—		μS
		C	h _{oe}	—	60	—		μS
Reverse Voltage Transfer Ratio	Current Gain Group A	h _{re}	—	1.5x10 ⁻⁴	—	—		
		B	h _{re}	—	2x10 ⁻⁴	—		—
		C	h _{re}	—	3x10 ⁻⁴	—		—
DC Current Gain	Current Gain Group A (Note 4)	h _{FE}	110 200 420	180 290 520	220 450 800	—	V _{CE} = 5.0V, I _C = 2.0mA	
		B						
		C						
Collector-Emitter Saturation Voltage (Note 4)		V _{CE(SAT)}	—	90 200	250 600	mV	I _C = 10mA, I _B = 0.5mA I _C = 100mA, I _B = 5.0mA	
Base-Emitter Saturation Voltage (Note 4)		V _{BE(SAT)}	—	700 900	—	mV	I _C = 10mA, I _B = 0.5mA I _C = 100mA, I _B = 5.0mA	
Base-Emitter Voltage (Note 4)		V _{BE(ON)}	580 —	660 —	700 770	mV	V _{CE} = 5.0V, I _C = 2.0mA V _{CE} = 5.0V, I _C = 10mA	
Collector-Cutoff Current (Note 4)	BC846 BC847 BC848	I _{CES}	—	—	15	nA	V _{CE} = 80V	
		I _{CES}	—	—	15	nA	V _{CE} = 50V	
		I _{CES}	—	—	15	nA	V _{CE} = 30V	
		I _{CBO}	—	—	15	nA	V _{CB} = 40V	
		I _{CBO}	—	—	5.0	μA	V _{CB} = 30V, T _A = 150°C	
Gain Bandwidth Product		f _T	100	300	—	MHz	V _{CE} = 5.0V, I _C = 10mA, f = 100MHz	
Collector-Base Capacitance		C _{CBO}	—	3.0	—	pF	V _{CB} = 10V, f = 1.0MHz	
Noise Figure		NF	—	2	10	dB	V _{CE} = 5V, I _C = 200μA, R _S = 2.0kΩ, f = 1.0kHz, Δf = 200Hz	

Notes: 4. Short duration pulse test used to minimize self-heating effect.

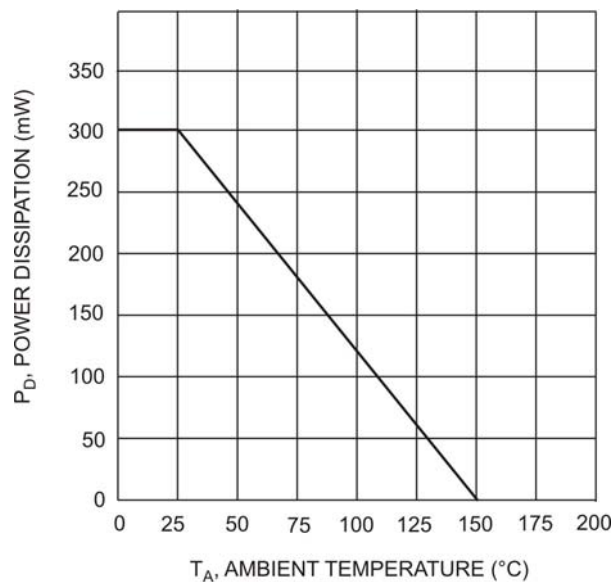


Fig. 1, Max Power Dissipation vs Ambient Temperature

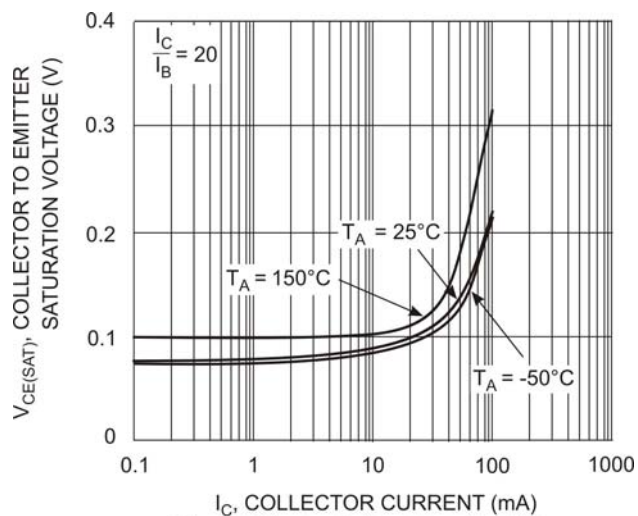


Fig. 2, Collector Emitter Saturation Voltage vs. Collector Current

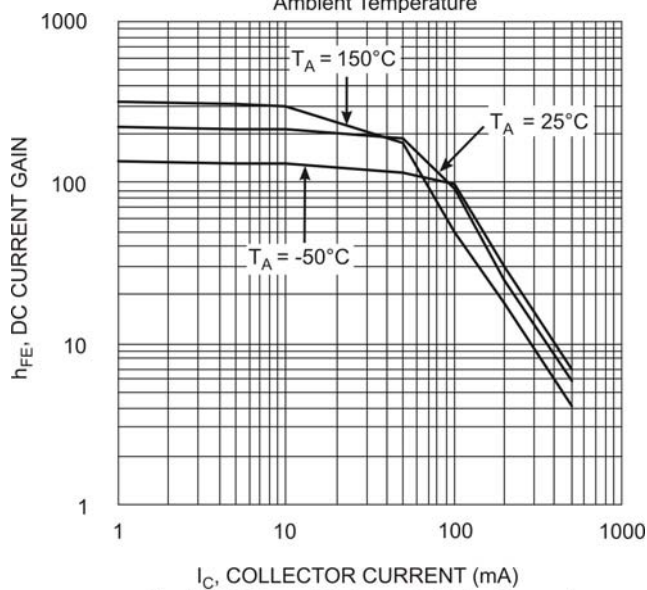


Fig. 3, DC Current Gain vs. Collector Current

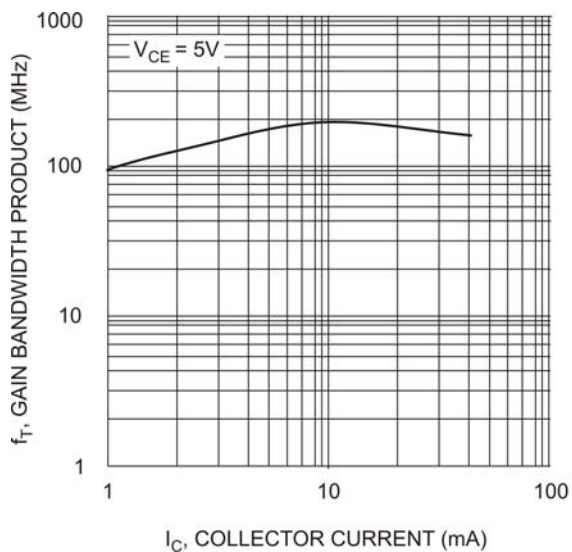


Fig. 4, Gain Bandwidth Product vs Collector Current


Ordering Information (Note 5)

Device*	Packaging	Shipping
BC84xx-7-F	SOT-23	3000/Tape & Reel

* xx = device type, e.g. BC846A-7-F.

Notes: 5. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



XXX = Product Type Marking Code (See Page 1), e.g.
 K1Q or 1A = BC846A
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	J	K	L	M	N	P	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.